


Matrix Vapor Deposition System

iMLayer



Three Features of iMLayer


- Creation of finer matrix crystal grains via the deposition method
- Improved reproducibility of matrix coatings via automatic coating thickness control
- Simple touch panel operation

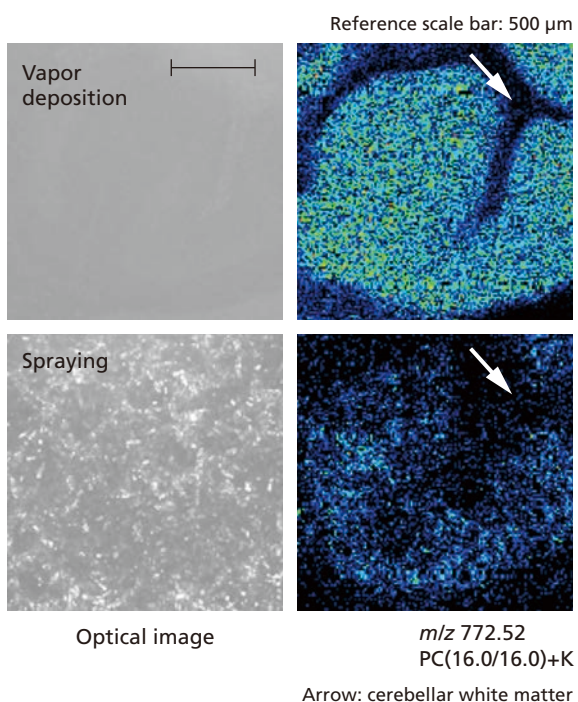


Achieves improved resolution and a matrix coating uniformity impossible using the spray method.

For iMScope TRIO



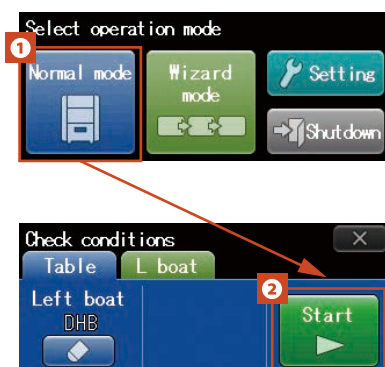

After system startup, press (1) and then (2) to start deposition.

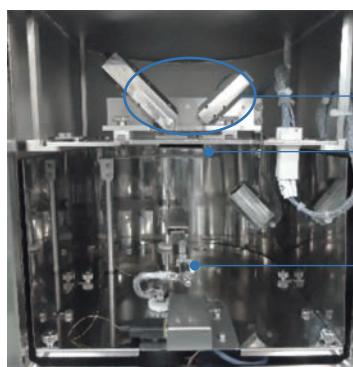

Coating thickness measurement area

Sample holder

Matrix boat/heater


Interior of the system

Specifications

Item	
Applicable matrix*1	DHB, 9-AA, CHCA
Vacuum level attained	1×10^{-3} Pa
Max. temperature	250°C
Sample	one glass slide

Note: This system applies matrix coatings via vacuum deposition. It cannot be used for pretreatment of highly volatile samples. Liquid matrices or highly volatile matrices cannot be used. Use transparent glass slides to control the system by checking the transmitted laser light.

Installation Example

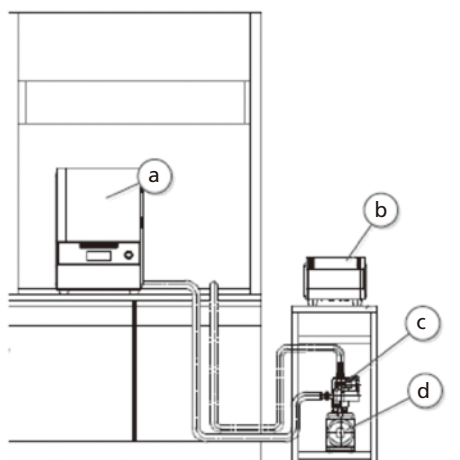

Please prepare for the draft chamber at the inside dimension of more than D650 × W1000 × H60 (mm).
Sirrocco fan: CES-V

Size and Weight

Component (No.)	Size (mm)			Weight (kg)
	W	H	D	
(a) Main unit	416	610	450	80
(b) Power supply	296	230	390	28
(c) Rotary pump	390	250	170	30
(d) Pump leak valve	—	—	—	1.8

Utilities

Power capacity	1.5KVA
Voltage	AC100±10%
Frequency	50/60Hz±1%
Max. power consumption	700VA
Current	30 A or more (15 A of this: in the fume hood)
Temp. and humidity	18 °C to 28 °C / 40 % to 70 %

Control mode

Coating thickness measurement mode	Measures and controls the coating thickness using a laser during deposition. The measurement conditions differ depending on the type of matrix.
Deposition time control mode	Set the type of matrix and deposition time for automatic operation.
Manual adjustment mode	Adjust the deposition time manually while checking the intensity of the transmitted laser light.

*1 Contact your Shimadzu representative regarding other matrices.
Matrix coating is performed via vacuum deposition. Liquid matrices or highly volatile matrices cannot be used.



Shimadzu Corporation

www.shimadzu.com/an/

Company names, product/service names and logos used in this publication are trademarks and trade names of Shimadzu Corporation or its affiliates, whether or not they are used with trademark symbol "TM" or "®". Third-party trademarks and trade names may be used in this publication to refer to either the entities or their products/services. Shimadzu disclaims any proprietary interest in trademarks and trade names other than its own.

For Research Use Only. Not for use in diagnostic procedures.

The contents of this publication are provided to you "as is" without warranty of any kind, and are subject to change without notice. Shimadzu does not assume any responsibility or liability for any damage, whether direct or indirect, relating to the use of this publication.

© Shimadzu Corporation, 2014

Printed in Japan 3655-06422-30AIT