




CHROMATOGRAPHY

Product Guide

Everything
for your
applications

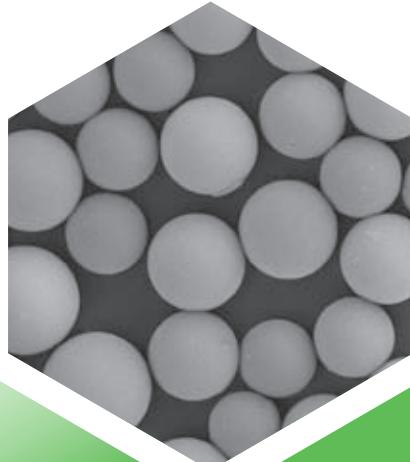

WHAT IS NEW

WHAT IS NEW

ASTRA® 2 µm HPLC columns

New ASTRA® HPLC columns are complementary to our ARION® brand. These columns offer not only a high-endcapped C18 phase, but also a unique DM phase with dual modification. Another novel phase C18-AQ offers dual chemistry bonding for analyses in aqueous mobile phases.

See page 54.



ARION® BIO and Biphenyl

New ARION® SAX and SCX columns extend the HPLC column range into ion-exchanged chromatography. The reversed phases have been extended with the Biphenyl phase to offer a wider range of selectivities.

See page 46.



ARION® preparative guard cartridges

The ARION® preparative guard system (PGS) offers protection for 21.2 mm ID columns.



SpeExtra™ SPE columns

SpeExtra™ is a new range of SPE column for your sample preparation. Florisil® and HLB columns are suitable for use in the environmental and toxicology area.

See details on page 70.



MetAmino™ sample preparation kit

The MetAmino™ kit offers an easy sample preparation method for your LC/MS or GC/MS analysis. It has been developed in the Czech Republic in co-operation with Biology Centre CAS.








See page 72.

HPLC COLUMN SELECTION

HPLC column selectivity

The selectivity is defined as the capability of stationary phases to separate analytes under certain conditions. The selectivity mainly depends on the structure, metal content and modification of base silica gel, type of chemical bonding or silica gel end-capping. The HPLC column selectivity has been measured according to the Tanaka plots (Tanaka, N. et al., Journal of Chromatographic Science, 27 (1989), 721–728), shown below. This allows users a quick comparison of different phases in order to choose the best possible HPLC columns for their application.

Property	Synonym	Measured parameter
Retention capacity	Hydrophobicity	k' (pentyl benzene)
Hydrophobicity	Methylene selectivity	α (pentyl benzene, butyl benzene)
Steric selectivity	–	α (triphenylene, o-terphenyl)
Hydrogen bonding capacity	Capacity of silanol	α (caffeine, phenol)
Ion-exchange capacity at pH>7	–	α (benzyl amine, phenol)
Ion-exchange capacity at pH<3	–	α (benzyl amine, phenol)

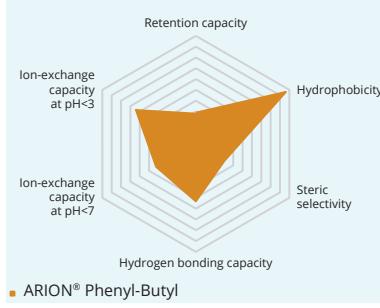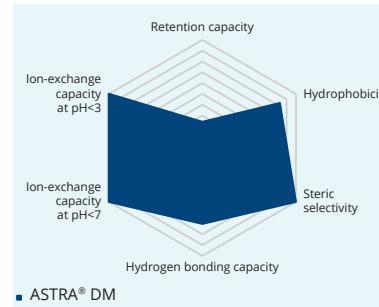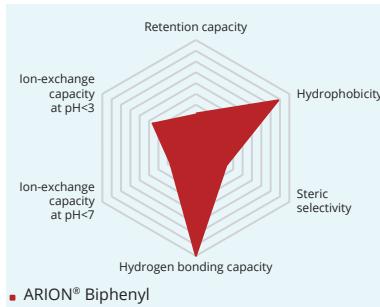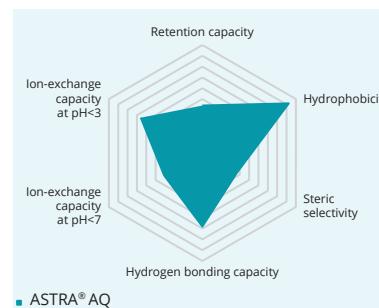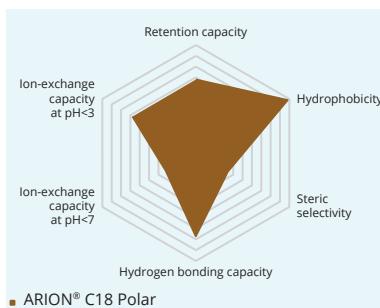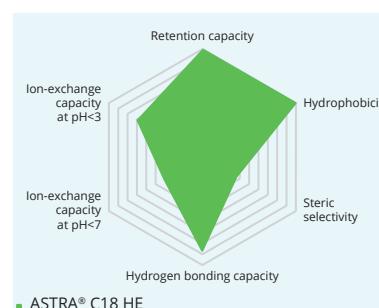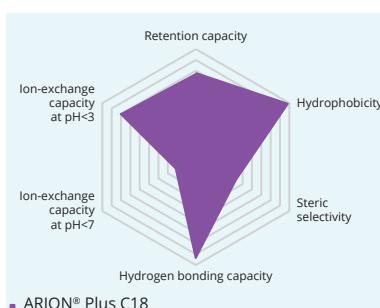




ARION®

ARION

As ARION® is one of the latest objects found in space, so it is also the best workhorse for your applications. Explore our new line of ARION® HPLC columns. What innovations does this column bring to you?

- Strict quality control of alkaline and metal content during the silica gel production.
- Narrow particle size and pore size distribution.
- Unique production process ensuring high lot-to-lot reproducibility.
- Good stability at higher temperatures.

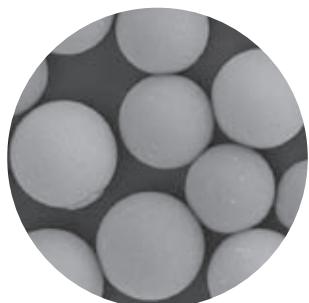

ARION® Silicagel

Particle size	5 µm	2.2 µm
Metal content	<10 ppm	<10 ppm
Temperature stability	100 °C*	100 °C*
Mean particle diameter	5.3 ± 0.9 µm	2.5 ± 0.5 µm
Proximity to the shape of a sphere	0.96 ± 0.04	0.97 ± 0.03


* Depends on mobile phase used and silica bonding.

ARION® phases	Particle size (µm)	Pore size (Å)	Surface area (m²/g)	Carbon load	pH stability	Endcapping	100% aqueous mobile phase	USP code
Plus C18	1.7, 2.2, 3, 5, 10, 15	100	420	18 %	1.0 to 10	Multi-step	✗	L1
Polar C18*	2.2, 3, 5, 10, 15	120	325	16 %	1.5 to 7	Multi-step	✓	L1
C8	3, 5	120	325	11 %	2.0 to 7	Single-step	✗	L7
Biphenyl	5	100	325	12 %	2.0 to 7.5	Proprietary	✓	L11
Phenyl-Butyl	2.2, 3, 5	100	300	12 %	1.5 to 7.5	Single-step	✗	L11
NH ₂	2.2, 3, 5	120	325	5 %	2.0 to 6.5	Proprietary	✗	L8
CN	3, 5, 10	120	325	8 %	2.0 to 7	Single-step	✗	L10
HILIC Plus	2.2, 3, 5	100	420	-	1.5 to 7	Proprietary	✓	L3
Si	2.2, 3, 5, 10	100	420	-	1.5 to 7	-	✗	L3
SAX	5	120	325	-	1.0 to 7.5	-	✗	L14
SCX	5	120	325	-	1.0 to 7.5	-	✗	L50


* Note: Unique selectivity for Amino Acid and small molecules.

What does ARION® quality look like?


ARION® particles have a very tight distribution and the closest proximity to the shape of a spherical particle ($c=0.9618 \pm 0.0353$). This ensures high separation power and separation reproducibility.

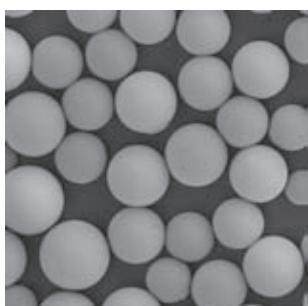


ARION®

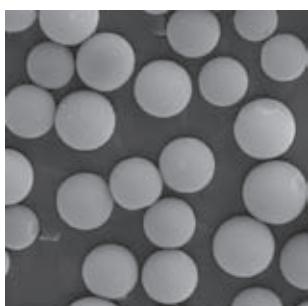

Competitor L

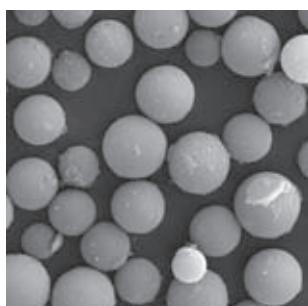

Competitor X

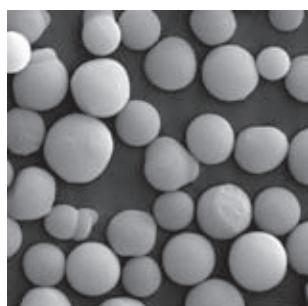

Competitor E


SEM HV analysis 20.0 kV, view field 30 µm (by independent laboratory)

The ARION® medium does not include broken or “potato-shaped” particles. The silica spherical shape is unique; both surface uniformity and surface smoothness enable better packing into HPLC columns and therefore paramount chromatography resolution and reproducibility.




Up close


The 5-micron electron microscope field clearly shows the highest quality of ARION® 5µm particles.

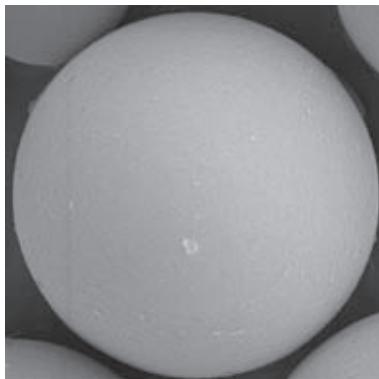


ARION® particle 5 µm

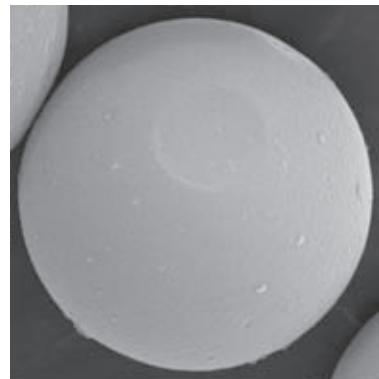

Competitor L particle 5 µm

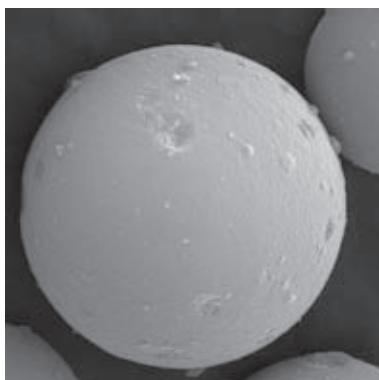

Competitor X particle 5 µm

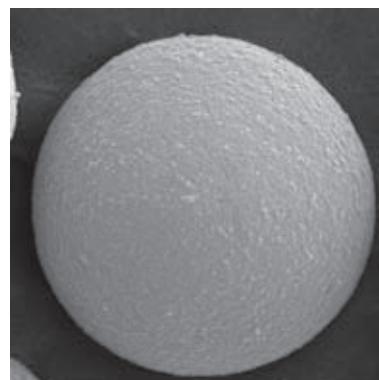


Competitor E particle 5 µm

Main particle characteristics:


- The closest proximity to a sphere.
- Unique surface smoothness shown in the pictures above.
- Tight particle size distribution.
- No broken particles.
- No presence of clustered particles.
- No "Moon craters or mountains".




Particle size distribution

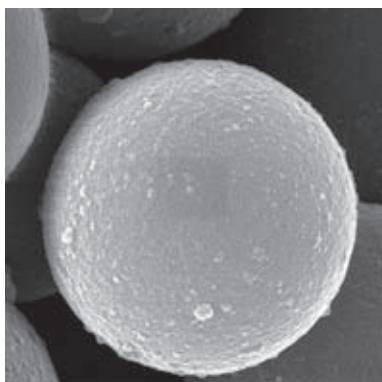

ARION® particle 1.7 μm

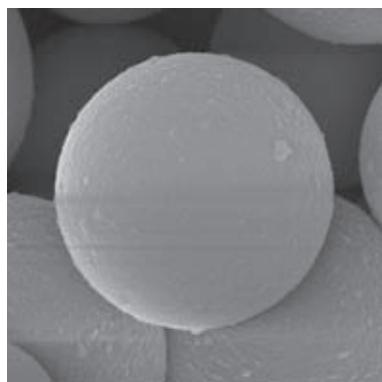

ARION® particle 2.2 μm

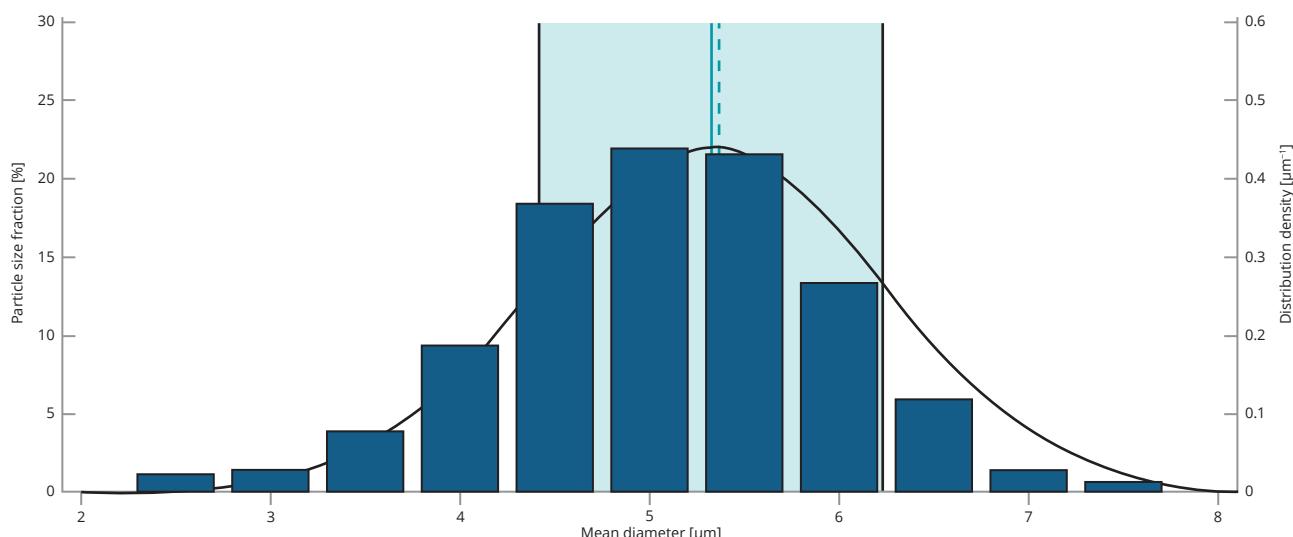


Particle size distribution of ARION® 5 μm particles shows a tight profile calculated from ferret figures by SEM.

ARION® column hardware:

- Modern column hardware for easy handling in a narrow space.
- UHPLC grade Stainless Steel with an amazingly smooth internal surface.
- Colour coded fittings.


Circularity

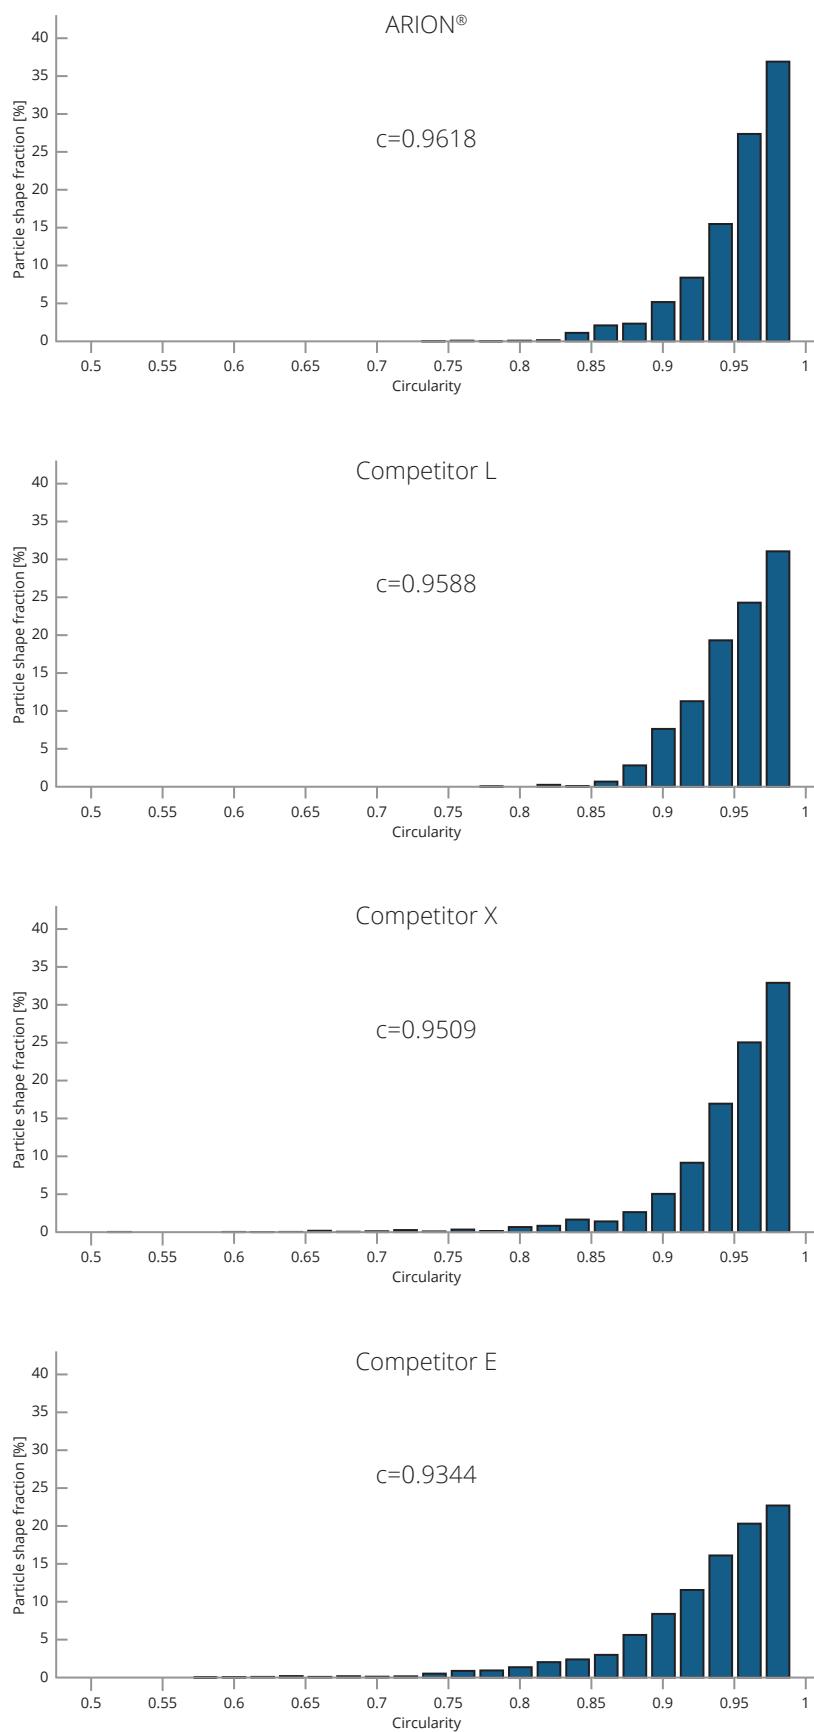




Batch to batch reproducibility

Batch-to-batch reproducibility is shown in the two bar graphs below. The silica batches are strictly controlled and checked for symmetry, and efficiency (number of theoretical plates/meter).

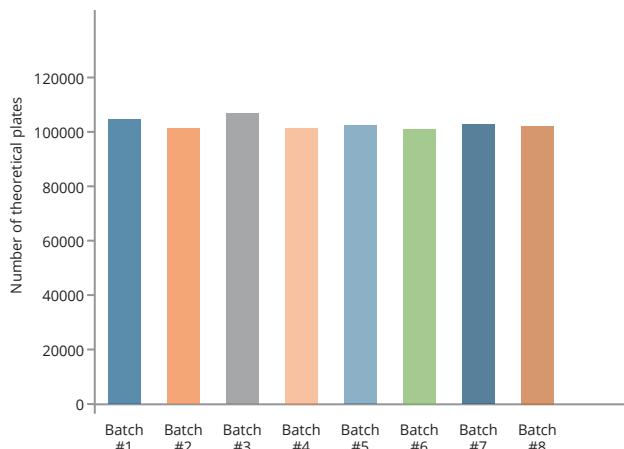


Theoretical plates reproducibility

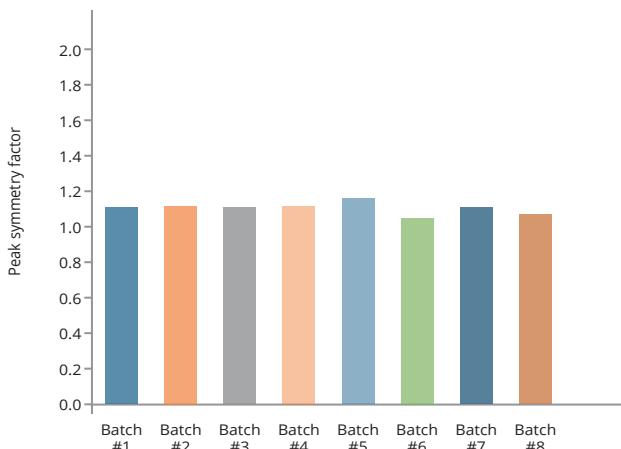


Symmetry reproducibility

Both the silanol activity and hydrofobicity tests are defined e.g. by the Engelhardt test. The hydrofobicity test is based on calculation of the ratio of retention factors $k_{\text{ethylbenzene}}/k_{\text{toluene}}$. The first picture of the Engelhardt test shows a comparison of 2 batches to UHPLC columns for 15 replicates.

Peak shape selectivity is based on a calculation of ratio of $k_{\text{triphenylene}}/k_{\text{o-terpenyl}}$.

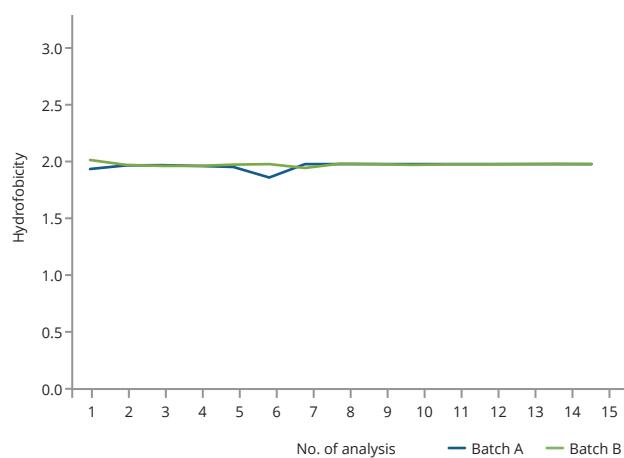


Hydrofobicity test

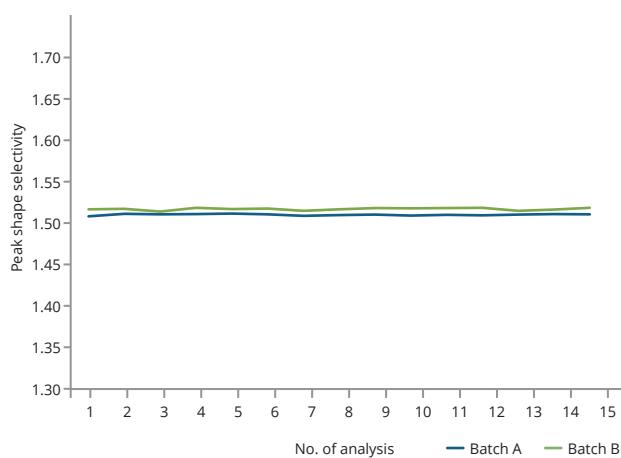


Peak shape selectivity

Batch to batch reproducibility

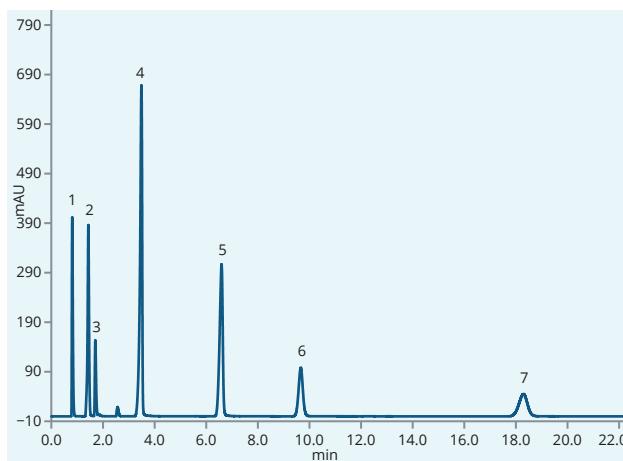

Batch A

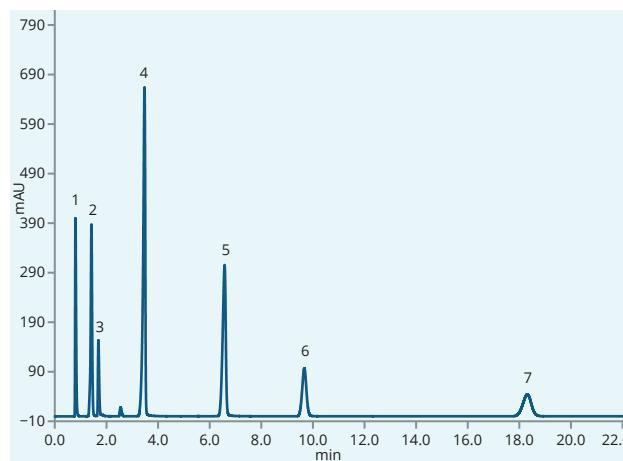


Batch B

Analysis of two batches based on the Engelhardt test.


Column	ARION® Plus C18, 1.7 µm
Dimensions	100 mm × 2.1 mm
Mobile phase	Methanol : water 49/51 (v/v) Isocratic elution
Flow rate	0.3 ml/min
Temperature	40 °C

Analytics

- 1. Uracil (t_0)
- 2. Aniline
- 3. Phenol
- 4. N,N-dimethyl-aniline
- 5. p-Ethyl-aniline
- 6. Toluene
- 7. Ethylbenzene

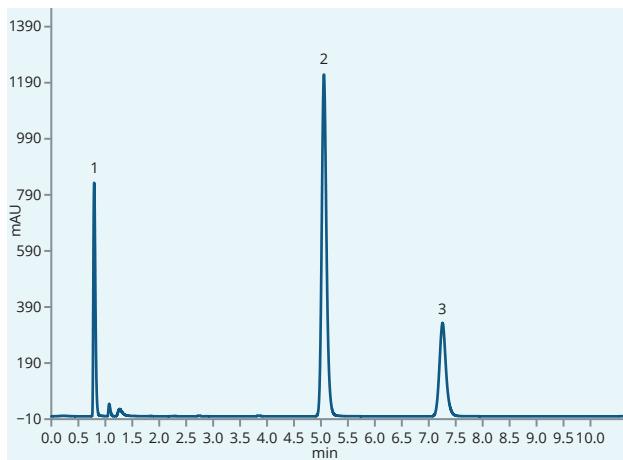

Batch A

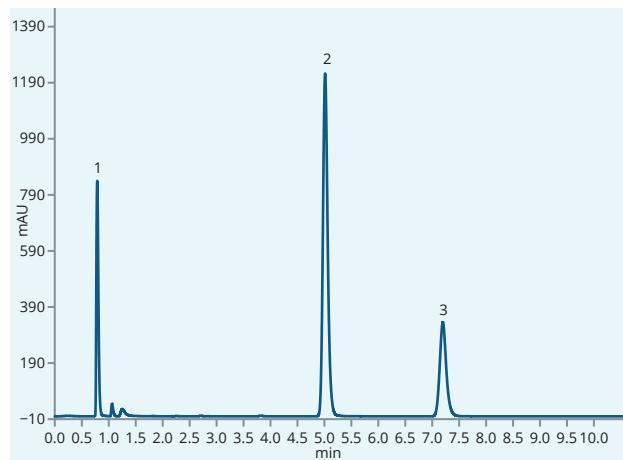

Batch B

Analysis of two batches based on the Shape selectivity test.

Column	ARION® Plus C18, 1.7 µm
Dimensions	100 mm × 2.1 mm
Mobile phase	Methanol : water 79/21 (v/v) Isocratic elution
Flow rate	0.3 ml/min

Temperature


40 °C

Analytics


- 1. Uracil (t_0)
- 2. Triphenylene
- 3. o-Terpenyl

Alkaloids – xanthine derivatives


Xanthine alkaloids occur naturally in various plants, such as cocoa, tea and coffee trees. They are commonly used for their effects as mild stimulants. Xanthine alkaloids are monitored in food and drinks, e.g. in chocolate, cocoa powder, and energy drinks.

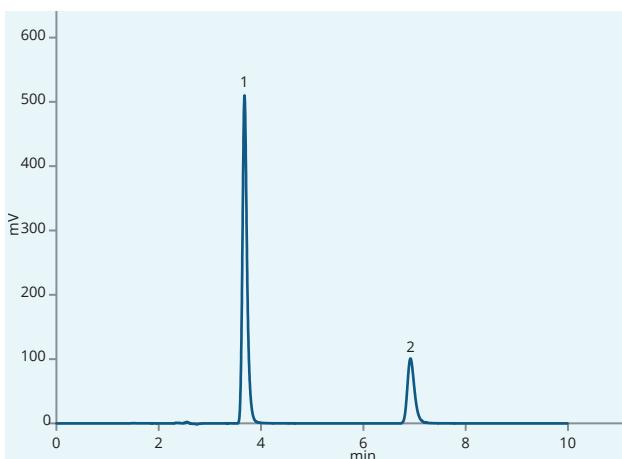

Theobromine and caffeine standard

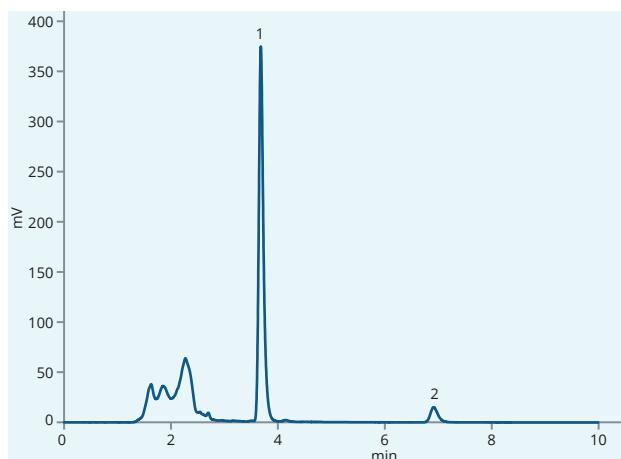

Cocoa sample


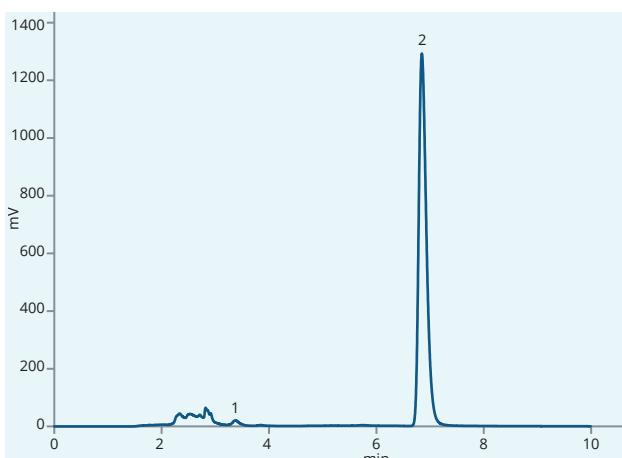


Energy drink

Column	ARION® Plus C18, 5.0 µm
Dimensions	250 mm × 4.6 mm
Part number	ARI-5720-LM46
Mobile phase	Methanol : water 30/70 (v/v)
Flow rate	1.0 ml/min
Temperature	30 °C
Detection	UV @280 nm
Analytes	1. Theobromine 2. Caffeine

Non-nutritive sweeteners


Low-calorie sweeteners are commonly used worldwide in the food and drink industry. The list of approved sweeteners varies from country to country. The most common method used to monitor these highly consumed products involves high performance liquid chromatography (HPLC or UHPLC).

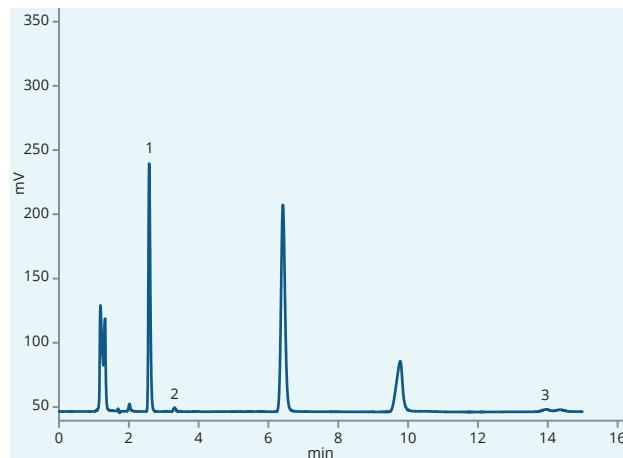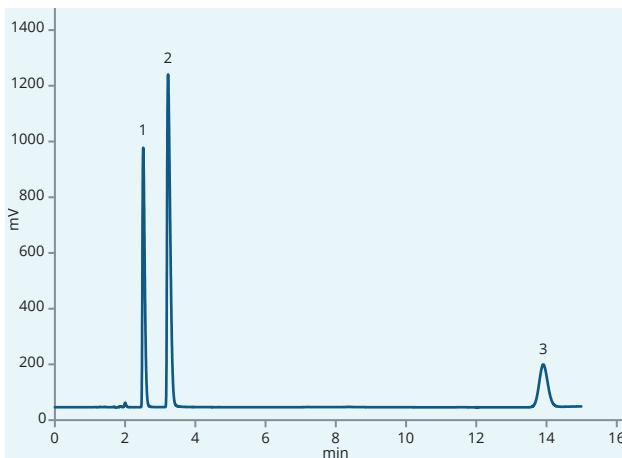

Column	ARION® Plus C18, 5.0 µm
Dimensions	250 mm × 4.6 mm
Part number	ARI-5720-LM46
Mobile phase	20 mM KH ₂ PO ₄ : ACN 90/10 (v/v)
Flow rate	2.0 ml/min
Temperature	30 °C
Detection	UV @220 nm
Analytics	1. Acesulfame-K (ACS-K) 2. Saccharin (SAC) 3. Aspartame (ASP)


Preservatives in syrup

Sodium and potassium salts of benzoic acid and sorbic acid are well-known food preservatives. The permitted amount in food is strictly regulated with the level depending on the food group. As an example, European regulation EC 1333/2008 sets the rules on food additives: definitions, conditions of use, labelling and procedures.

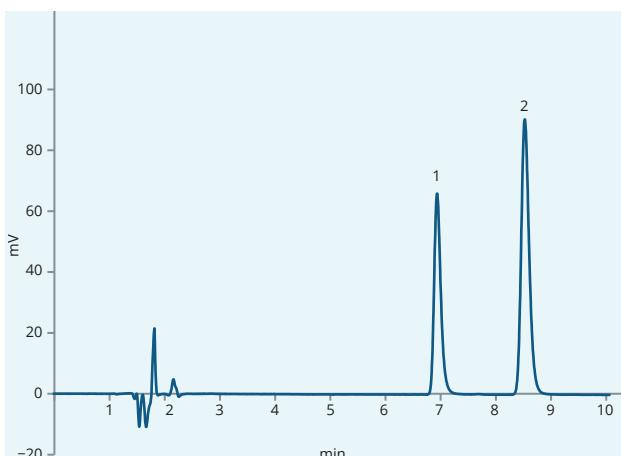

Standard mixture

Column	ARION® Plus C18, 5.0 µm
Dimensions	250 mm × 4.6 mm
Part number	ARI-5720-LM46
Mobile phase	Citrate buffer pH 4.1 : ACN : MeOH 70/20/10 (v/v/v)

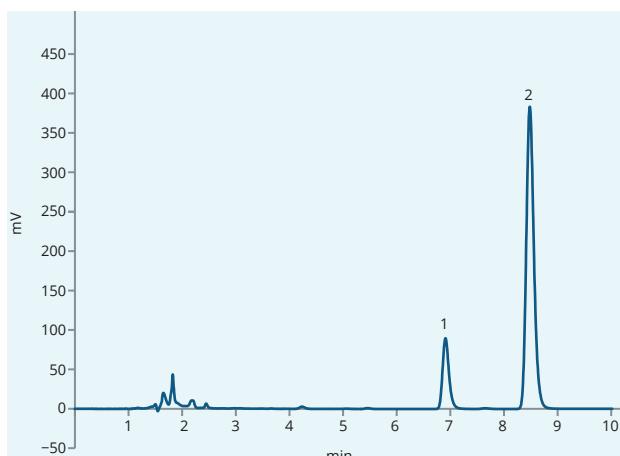


Fruit syrup sample

Flow rate	1.5 ml/min
Temperature	30 °C
Detection	UV @240 nm
Analytes	1. Sodium benzoate 2. Potassium sorbate


Preservatives in fats and oils

BHA is used as an antioxidant and preservative in food, animal feed, cosmetics and in rubber and petroleum products. BHT is also used as a preservative and, additionally, as a dietary supplement. BHA is generally recognized as being safe for use in food if the total amount does not exceed 0.02 % fat or oil (FDA). It is suspected of being a human carcinogen.

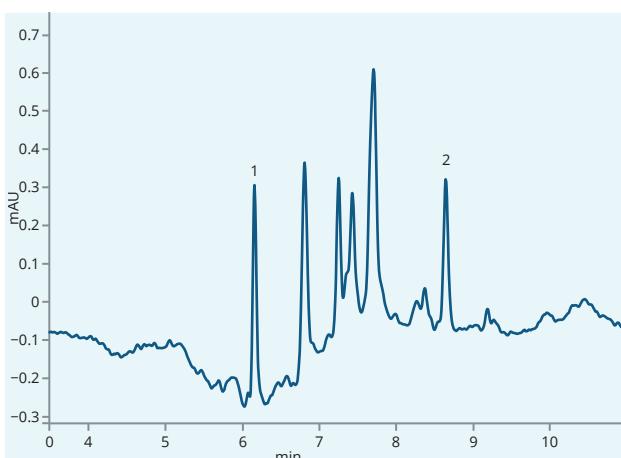

Matrix standard on ARION® column

Column	ARION® Plus C18, 5.0 µm
Dimensions	250 mm × 4.6 mm
Part number	ARI-5720-LM46
Mobile phase	Citrate buffer pH 4.1 : ACN : MeOH 70/20/10 (v/v/v)

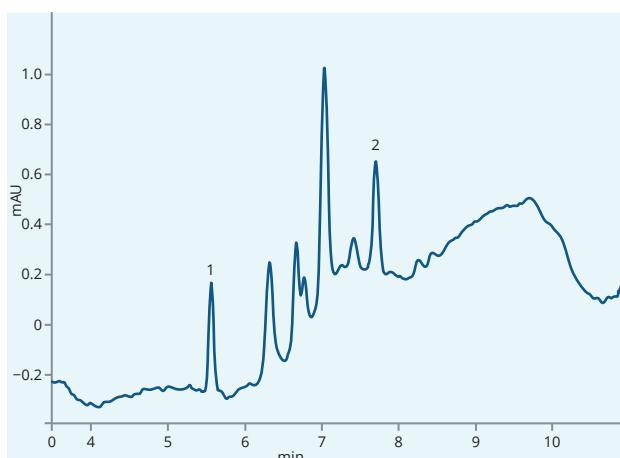


Matrix standard on competitive column (Competitor LI)

Flow rate	Proprietary
Temperature	Proprietary
Detection	UV (wavelength proprietary)
Analytes	1. BHA 2. BHT

Organic acids

The identification and quantitative analysis of major organic acids in fruits and vegetables is considered very important for the food and beverage industry. Organic acids play a significant role thanks to their influence on flavour, stability and keeping quality. Organic acids are generated during the aerobic oxidation of carbohydrates, proteins and fats in most biological systems.

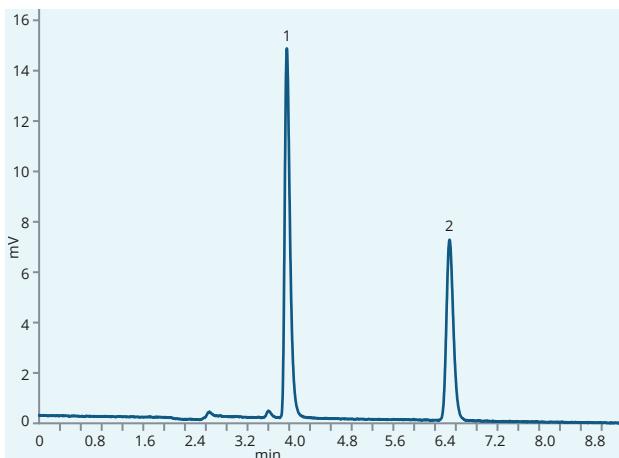


Standard mixture

Column	ARION® Polar C18, 5.0 µm
Dimensions	250 mm × 4.6 mm
Part number	ARI-5721-LM46
Mobile phase	0.05% H ₃ PO ₄
Flow rate	1.0 ml/min
Temperature	30 °C
Detection	UV @207 nm
Analytics	1. Formic acid 2. Acetic acid

Drink additives

This application shows the separation of three groups of compounds in parallel: non-nutritive sweeteners, preservatives (organic acids) and xanthine derivatives.

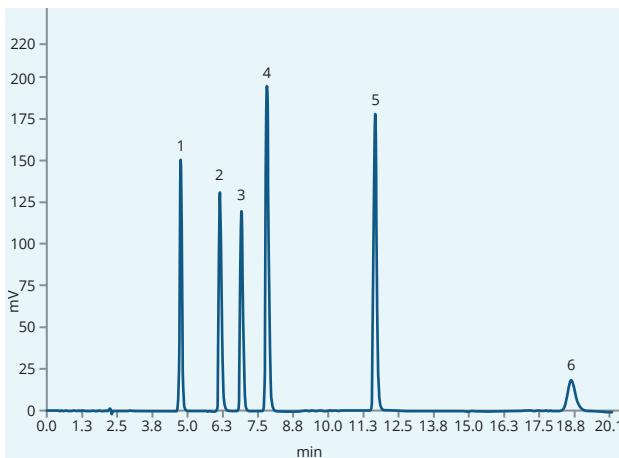

Standard mixture


Column	ARION® Plus C18, 5.0 µm
Dimensions	150 mm × 4.6 mm
Part number	ARI-5720-LK46
Mobile phase	Acetonitril : methanol : 17.5 mmol/l KH ₂ PO ₄ 0.1 mol/l NaOH > pH=6.0 gradient according table below*
Temperature	Ambient
Detection	UV @214 & 230 nm
Analytics	1. Acesulfame-K 2. Benzoic acid 3. Saccharin 4. Sorbic acid 5. Caffeine 6. Aspartame

* Gradient program

Time (min)	Flow rate (ml/min)	Wavelength (nm)	A (%) (Water)	B (%) 17.5M KH ₂ PO ₄	C (%) Acetonitrile	D (%) Methanol
0	1.3	230	0	90	2	8
7	1.5	214	0	80	8	12
14	1.5	214	0	80	8	12
15	1.3	214	0	90	2	8
17	1.3	214	0	90	2	8

Vitamins A and E

Fat-soluble vitamins are monitored not only in patient's samples, but are also the subject of quality control in various food and dietary supplements.

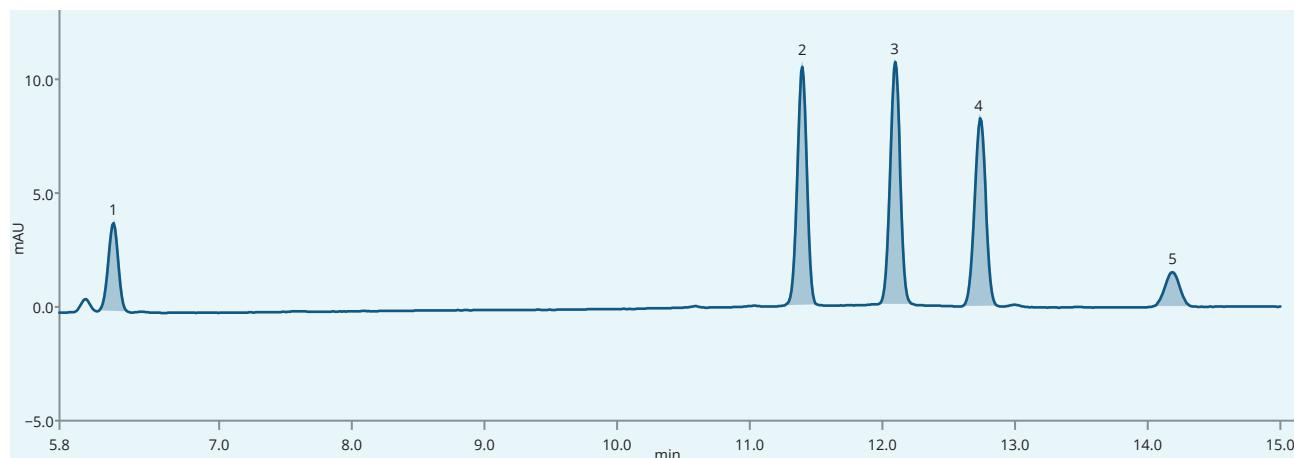


Standard on ARION® column


Column	ARION® Plus C18, 3 µm		
Dimensions	100 mm × 4.6 mm		
Part number	ARI-5720-II46		
Mobile phase	A: Water B: Methanol		
Gradient elution	Time	A (%)	B (%)
	0	15	85
	10	0	100
	18	0	100
Flow rate	1.0 ml/min		
Temperature	40 °C		
Injection volume	5.0 µl		
Detection	UV @284 nm		
Analytes	1. Retinol (Vitamin A) 2. Delta-tocopherol (D-Vitamin E) 3. Gamma-tocopherol (Vitamin E γ) 4. Alfa-tocopherol (Vitamin E α) 5. Alpha-Tocopheryl acetate (Vitamin E acetate)		

Vitamins A and E


Calibration curves of analytes

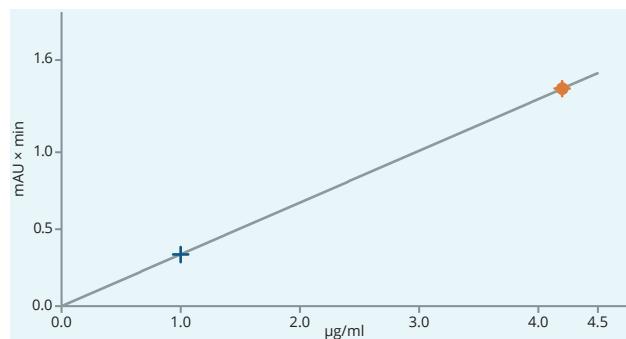


Retinol (Vitamin A)

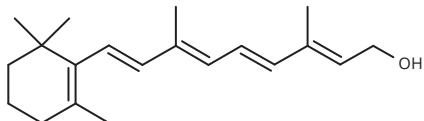


Retinol (Vitamin A)

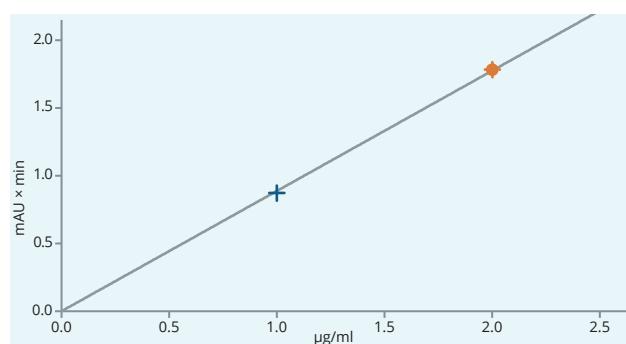


Delta-tocopherol (D-Vitamin E)

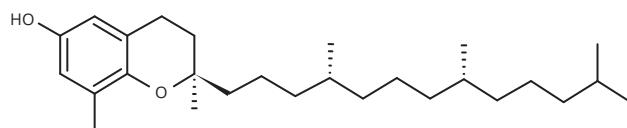


Delta-tocopherol (D-Vitamin E)

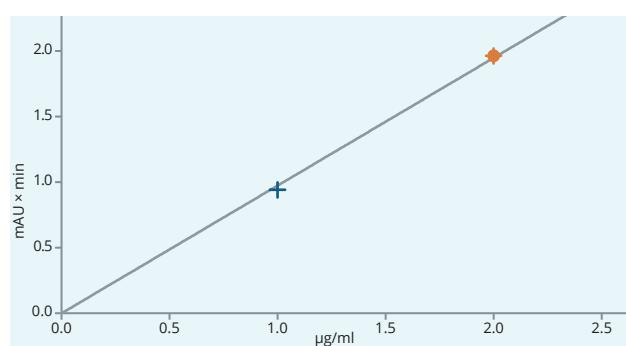


Gamma-tocopherol (Vitamin E γ)

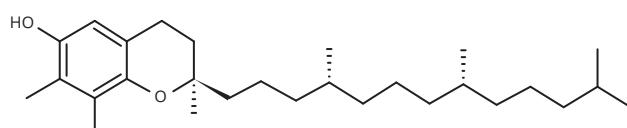

Gamma-tocopherol (Vitamin E γ)

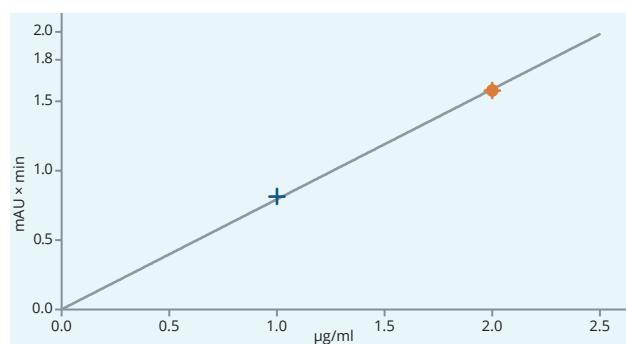


Alfa-tocopherol (Vitamin E α)

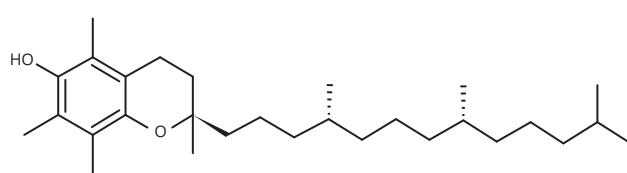

Alfa-tocopherol (Vitamin E α)

Denatonium Benzoate

Denatonium benzoate (CAS Number 3734-33-6) is sold under various brand names, e.g. Denatrol, BITTERANT-b, BITTER+PLUS, Bitrex and Aversion. It is considered the most bitter compound by the whole world, which is why it is used as a denaturant of ethanol to prevent its misuse. This application shows fast isocratic elution to enhance productivity in the laboratory.

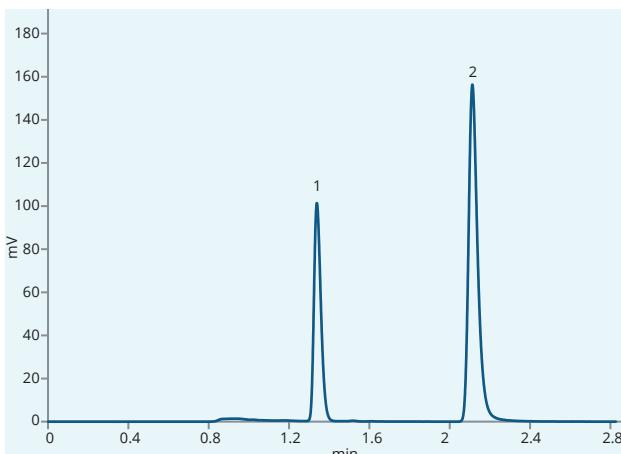


Ethanol sample


Column	ARION® Plus C18, 5.0 µm
Dimensions	250 mm × 4.6 mm
Part number	ARI-5720-LM46
Mobile phase	A : B 50/50 (v/v) A: Acetonitrile B: 0.5% H ₃ PO ₄ in mili-Q water, (pH = 2) Isocratic elution
Flow rate	2.0 ml/min
Temperature	Ambient
Detection	UV @230 nm (ref. 550 nm, 100 nm BW)
Analytics	1. Benzoic acid 2. Denatonium

HMF in syrup

5-Hydroxymethylfurfural (5-HMF) is formed from fructose or glucose by the heat treatment of food. HMF and its derivates/metabolites are genotoxic, mutagenic and may be carcinogenic, which is why HMF is analysed in various food matrices, such as in fruit and vegetable products, instant coffee and honey.

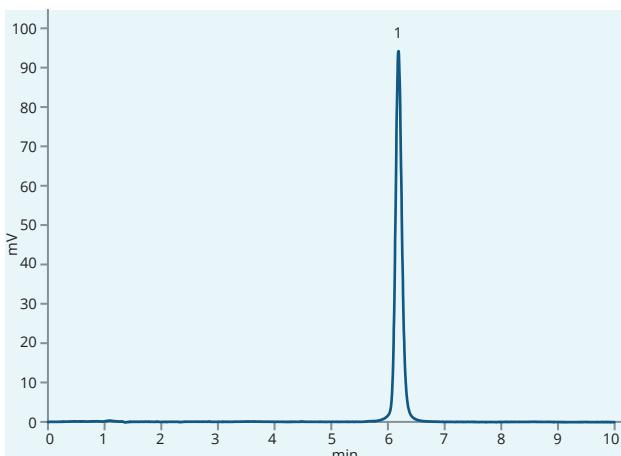

Standard mixture on ARION® column

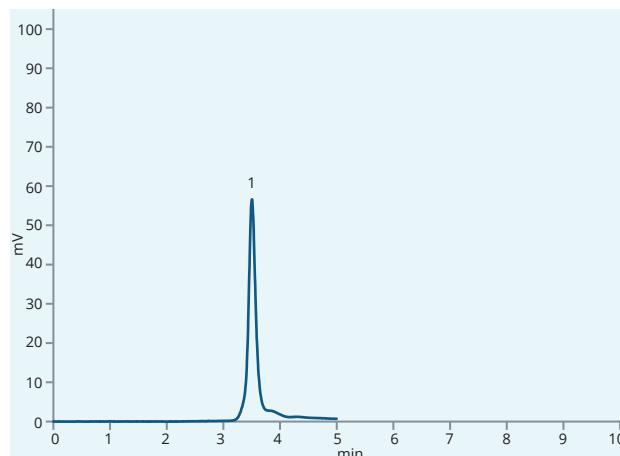


Comparison with core-shell column (Competitor K)

Column	ARION® Plus C18, 5.0 µm
Dimensions	250 mm × 4.6 mm
Part number	ARI-5720-LM46
Mobile phase	Methanol : water 10/90 (v/v) Isocratic elution
Flow rate	1.5 ml/min
Temperature	30 °C
Detection	UV @285 nm
Analytics	1. Hydroxymethylfurfural


Monosaccharides, disaccharides and sugar alcohol

The analysis of saccharides and sugar alcohol is one of the most common criteria in food and beverage analyses in the QC departments of manufacturers and the monitoring of authorities. This analysis of sugars and sugar alcohols is also used to detect food and beverage adulteration.

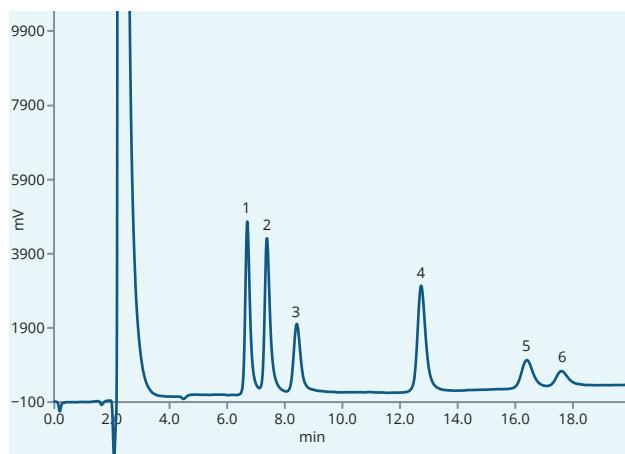


Column	ARION® NH ₂ , 5 µm
Dimensions	250 mm × 4.6 mm
Part number	ARI-5736-LM46
Mobile phase	ACN/water 75/25 (v/v) Isocratic elution
Flow rate	1.5 ml/min
Temperature	35 °C
Detection	RID
Analytes	1. Fructose 2. Sorbitol 3. Glucose 4. Sucrose 5. Maltose 6. Lactose

Analysis of standard on ARION® column

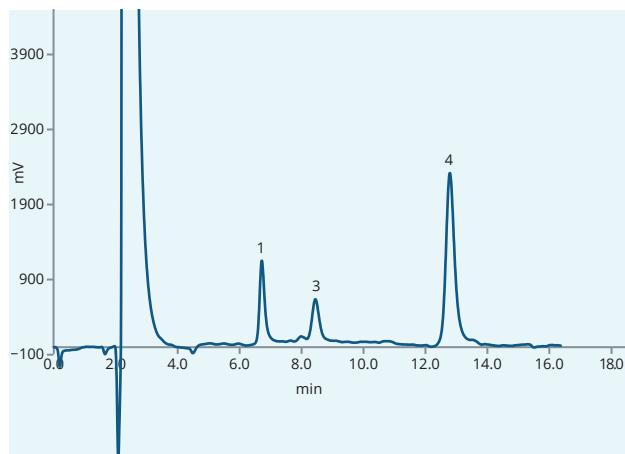


Analysis of carrot juice on ARION® column

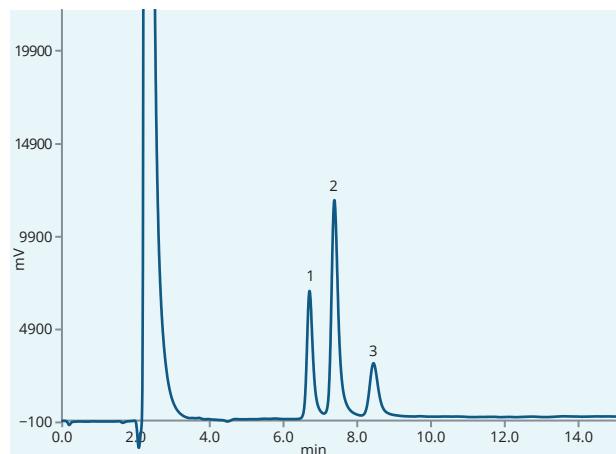

Analysis of Aronia (chokeberry) juice on ARION® column

Wheat pigments

This application has been developed by ALGATECH, the Institute of Microbiology of the Academy of Sciences, Czech Republic. Chlorophylls and carotenoids are essential cofactors for oxygenic photosynthesis. As the content and stoichiometries of individual pigments are vary significantly in plant leaves under different environmental conditions, the quantification of pigments is important for understanding plant physiology, but also for food-quality monitoring.

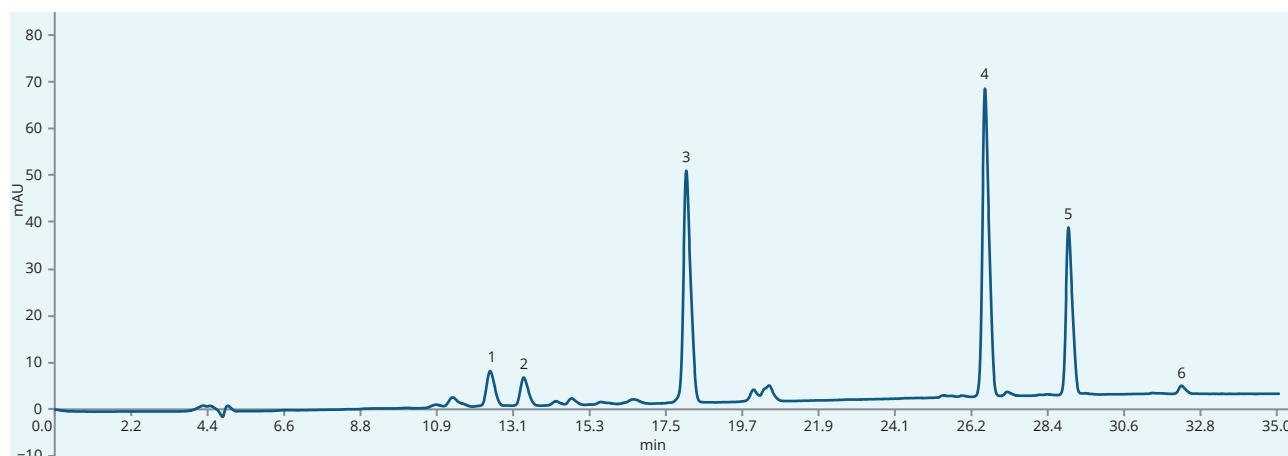


Wheat extract on ARION® column

Column	ARION® C8, 5 µm
Dimensions	250 mm × 4.6 mm
Part number	ARI-5734-LM46
Mobile phase	A: Methanol : Acetonitrile : 0.25M pyridine 32/14/54 (v/v/v) B: Methanol : Acetonitrile : Acetone 20/60/20 (v/v/v)
Gradient	Linear gradient of solvent B (60–100 % in 25 min) followed by 100 % solvent B
Flow rate	0.8 ml/min
Temperature	40 °C
Detection	DAD @450 nm
Analytes	1. Neoxanthin 2. Violaxanthin 3. Lutein 4. Chlorophyll b 5. Chlorophyll a 6. β-Carotene

Bitter acids in hop

Alpha-bitter acids are precursors of iso-a-bitter acids that are formed during the brewing process. They are present in hops (*Humulus Lupulus L.*) and their content depends on plant species and growing conditions. Iso-a-bitter acids give an appreciable bitter taste to the beer.

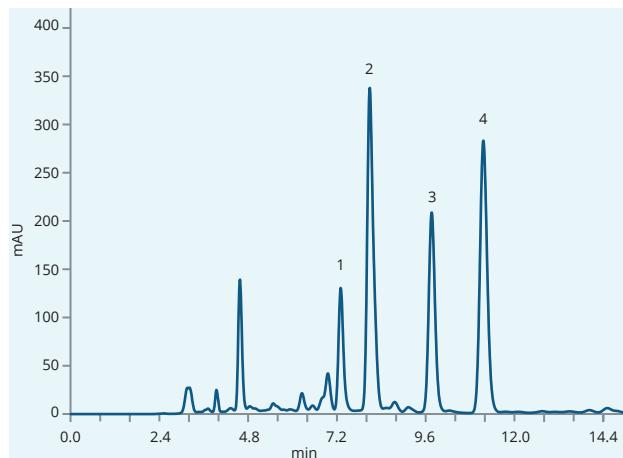


Alpha- & beta- acids in hop sample

Column	ARION® Plus C18, 5.0 µm
Dimensions	250 mm × 4.6 mm
Part number	ARI-5720-LM46
Mobile phase	MeOH : water : phosphoric acid 850/150/5 (v/v/v) Isocratic elution
Flow rate	0.8 ml/min
Temperature	40 °C
Detection	UV @314 nm
Analytes	1. Co-humulone 2. Humulone 3. Co-lupulone 4. Lupulone

Aflatoxins by LC/MS

Aflatoxins are Group 1 carcinogens and are a natural product of mould. Mycotoxines are monitored worldwide and allowed concentration limits depend not only on the territory, but also on the food/feed matrix and are given by local administrations.




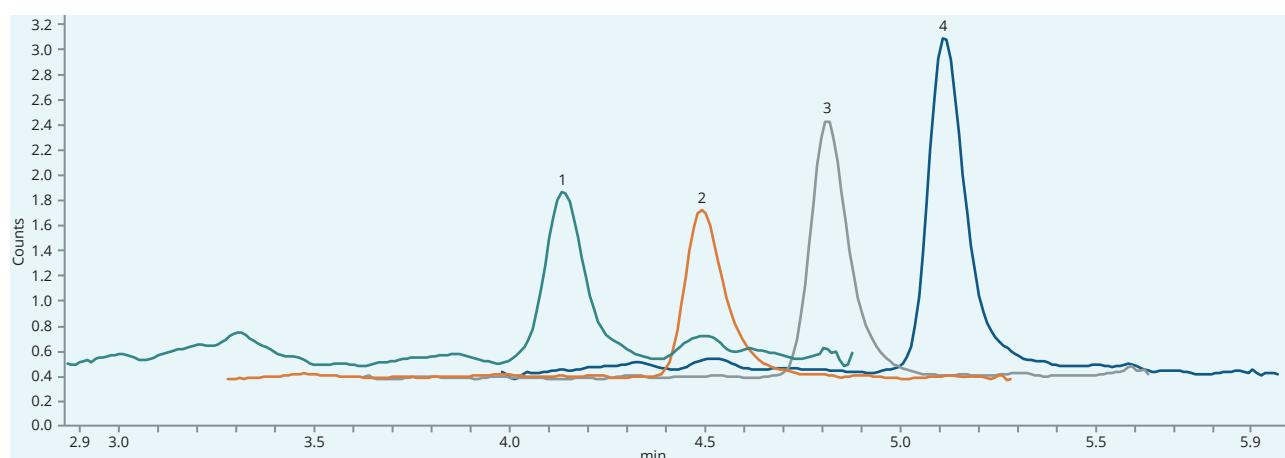


Stress test – test mixture on ARION® column

Column	ARION® Plus C18, 2.2 µm	
Dimensions	100 mm × 2.1 mm	
Part number	ARI-5720-EI21	
Mobile phase	A: 5mM ammonium formate / 0.2% formic acid B: Methanol / 0.2% formic acid	
Gradient elution	Time	A (%)
	0.0	70
	0.5	70
	8.0	0
	10.5	0
	10.6	70
Flow rate	0.35 ml/min	
Temperature	40 °C	
Analytics	1. Aflatoxin B1 2. Aflatoxin B2 3. Aflatoxin G1 4. Aflatoxin G2	





MS method:

Compound name	Precursor Ion	Product Ion	Collision energy
Aflatoxin B1	313.07	284.9	25
Aflatoxin B1	313.07	240.9	45
Aflatoxin B2	315.09	286.9	33
Aflatoxin B2	315.09	259	33
Aflatoxin G1	329.07	310.9	25
Aflatoxin G1	329.07	198.9	57
Aflatoxin G2	331.08	312.9	25
Aflatoxin G2	331.08	189.1	49

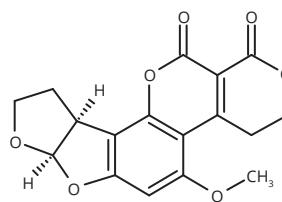
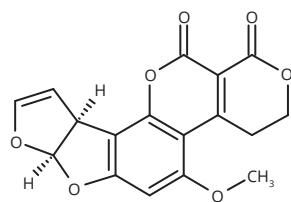
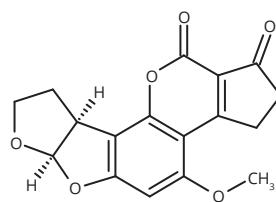
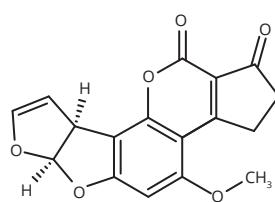


Aflatoxins by LC/MS

This page shows analyses of peppers and Brazil nuts.

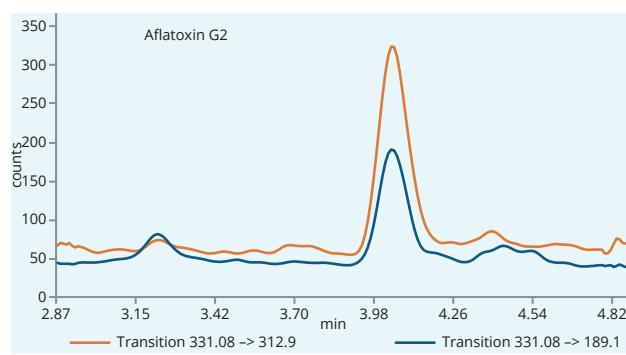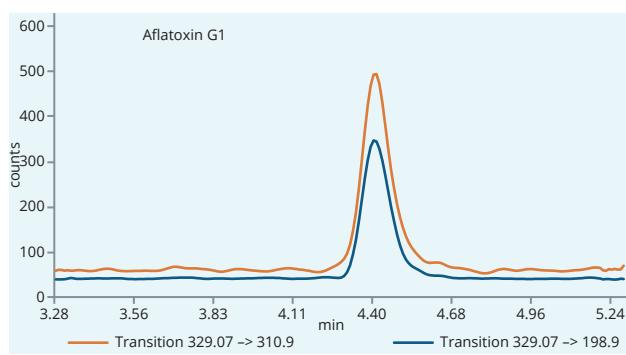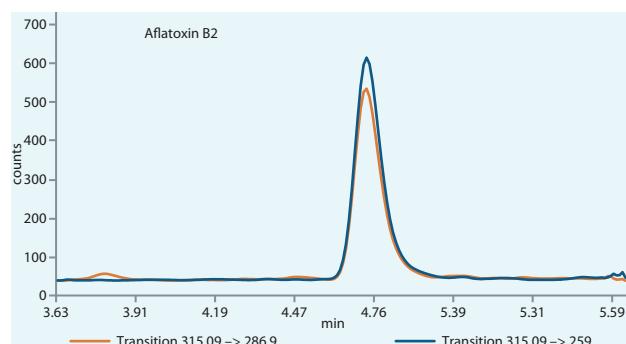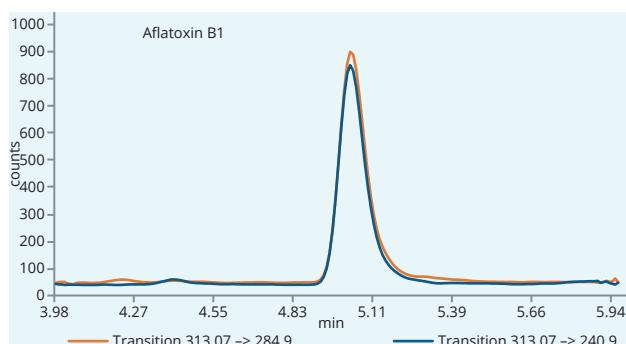

LC/MS analyses of aflatoxins in Brazil nuts

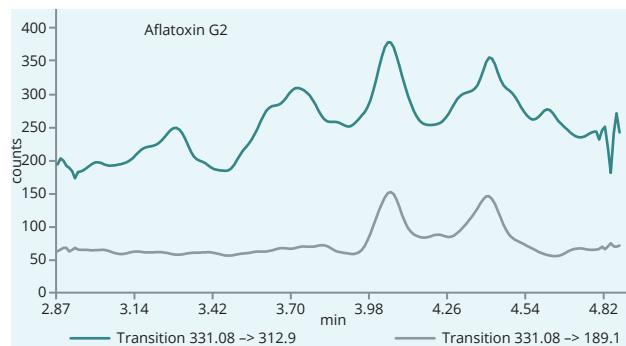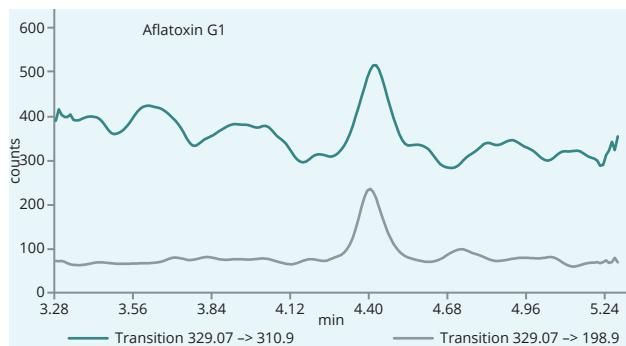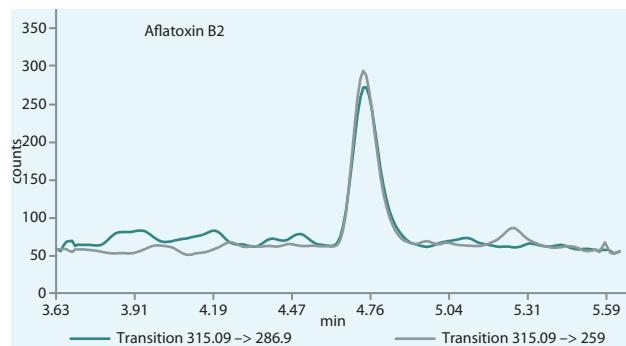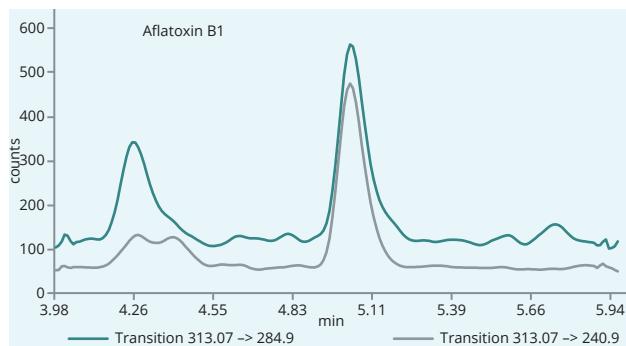


LC/MS analyses of aflatoxins in peppers

ARION® CLINICAL APPLICATIONS

Vitamin D in dry blood spot

Vitamin D is a group of steroids that have various effects on the human body and support the immune system. This application shows LC/MS/MS separation of the hydroxylated and non-hydroxylated forms of vitamin D2 and vitamin D3. The amount of their hydroxylated forms determines the total vitamin D in a blood sample. Non-hydroxylated forms of vitamin D2 and vitamin D3 are important for food analysis. The LC/MS/MS chromatogram shows the separation of all the above mentioned analytes.

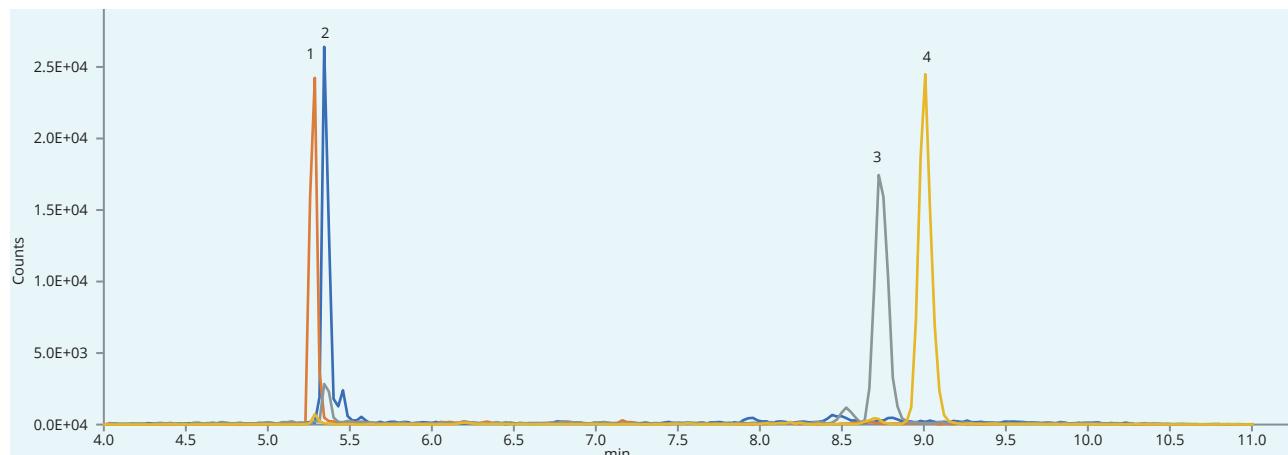

Standard mixture on ARION® column

Chromatography method:

Column	ARION® Polar C18, 2.2 µm		
Dimensions	100 mm × 2.1 mm		
Part number	ARI-5720-EI21		
Mobile phase	A: H ₂ O, 0.1% formic acid B: MeOH, 0.1% formic acid		
Gradient elution	Time	A (%)	B (%)
	0.0	70	30
	2.0	0	100
	7.0	0	100
	7.1	30	70
	12.0	30	70
Flow rate	0.4 ml/min		
Temperature	25 °C		
Injection volume	10 µl		
Detection	UV @280 nm		
Analytes	1. 25-OH-Vitamin D3 2. 25-OH-Vitamin D2 3. Vitamin D2 4. Vitamin D3		





ARION® CLINICAL APPLICATIONS

Vitamin D in dry blood spot

MS method:


Ionisation	Positive APCI		
Collision gas	Nitrogen		
MRM transition	Analyte	Q1 (Da)	Q3 (Da)
	25-OH-Vitamin D2	413.32	395.30
	25-OH-Vitamin D3	401.22	365.40
	Vitamin D2	397.44	379.20
	Vitamin D3	385.32	259.40
Dwell time	150 ms		

This application was developed by Ján Šmoldas.

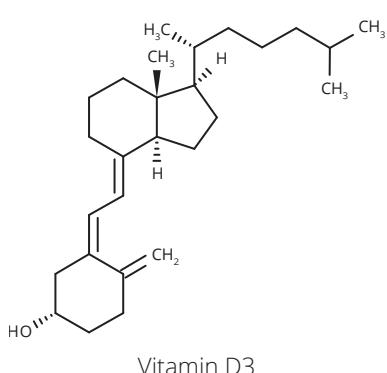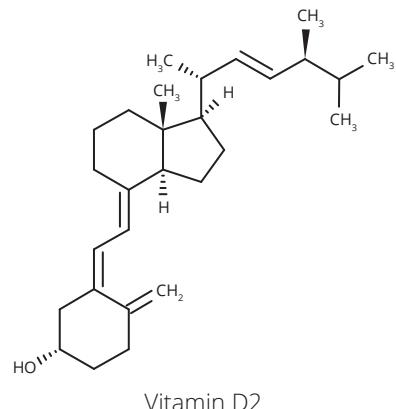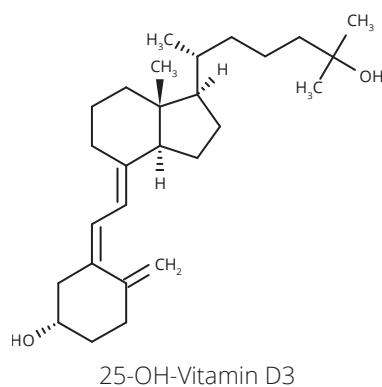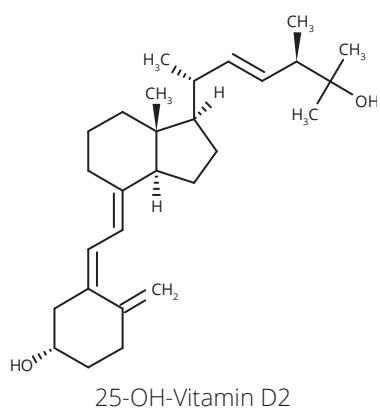


Pharmaceutical drugs

Penicillin is a well known antibiotic discovered by Alexander Fleming, which was isolated from the mold *Penicillium notatum*. The application shows better separation of impurities in pharmaceutical production.

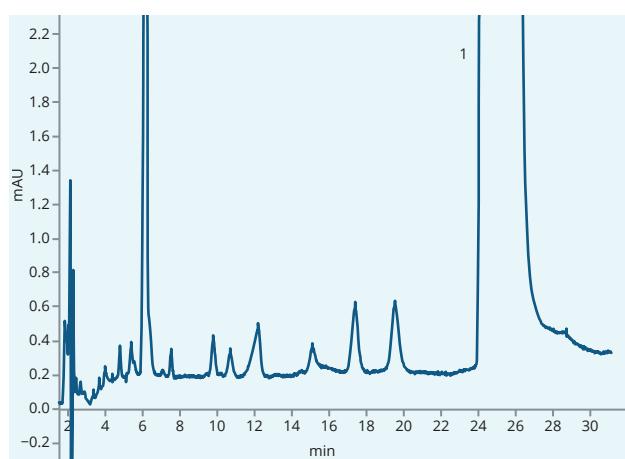

Separation on ARION® column

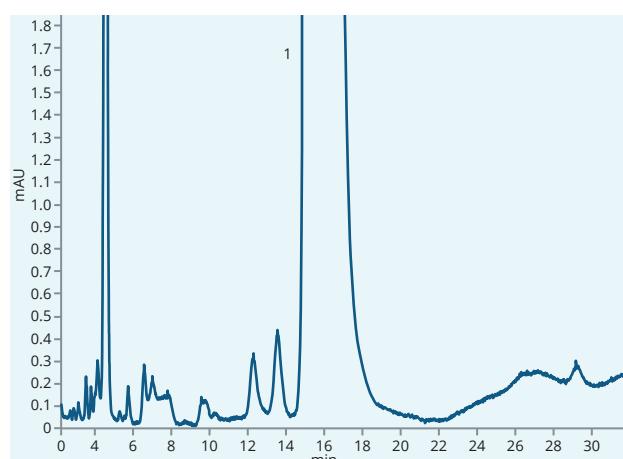


Separation on competitive column (Competitor LI)

Column	ARION® Plus C18, 5.0 µm
Dimensions	250 mm × 4.6 mm
Part number	ARI-5720-LM46
Mobile phase	Gradient elution (proprietary)
Flow rate	1.2 ml/min
Detection	UV @254 nm
Analytes	1. Penicillin

Ipidacrine

Ipidacrine is a drug inhibitor of acetylcholinesterase produced for the treatment of memory disorders caused by various diseases. It was first synthesized by the National Research Centre for Biologically Active Compounds (Russian Federation).

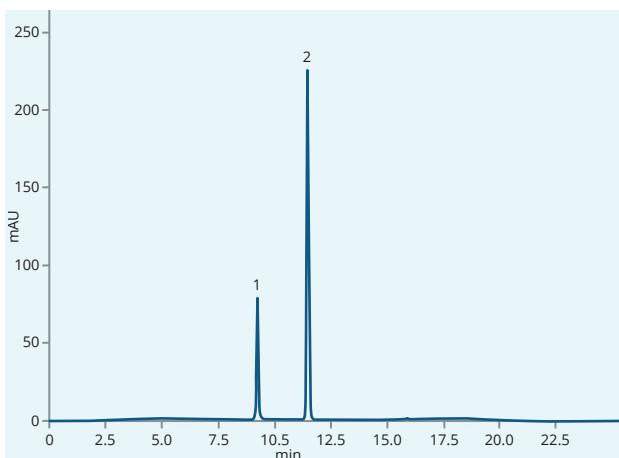


Standard mixture

Column	ARION® Plus C18, 5.0 µm
Dimensions	250 mm × 4.6 mm
Part number	ARI-5720-LM46
Mobile phase	Proprietary
Flow rate	Proprietary
Temperature	Proprietary
Detection	DAD
Analytes	1. Impurity A 2. Ipidacrine

Ibuprofen

Ibuprofen is a substance from a group of non-steroidal anti-inflammatory drugs. In order for the drug release to be targeted on the basis of pH change (gradual release for up to 30 days), binding to a polymeric carrier is used.

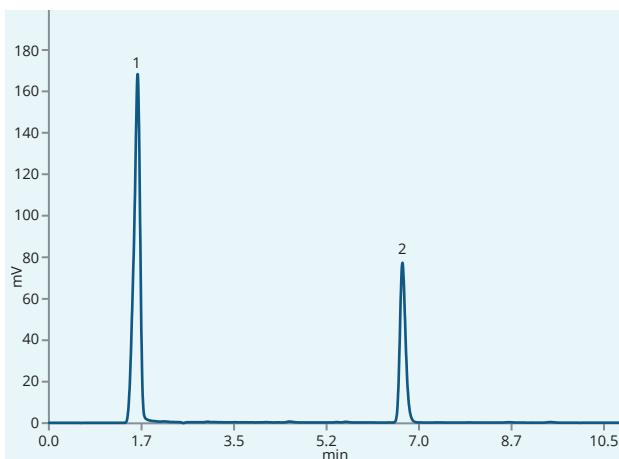


Standard mixture


Column	ARION® Plus C18, 5.0 µm
Dimensions	250 mm × 4.6 mm
Part number	ARI-5720-LM46
Mobile phase	ACN : water 70/30 (v/v) + 0.1% formic acid Isocratic elution
Flow rate	1.0 ml/min
Temperature	Ambient
Detection	UV @265 nm
Analytes	1. Ibuprofen on polymer carrier 2. Ibuprofen

Pharmaceutical drugs


Tamsulosin hydrochloride is used to treat the symptoms of an enlarged prostate. Tamsulosin hydrochloride is an alpha-blocker which is used to treat the symptoms of an enlarged prostate by relaxing the muscles of the prostate and bladder. Tamsulosin is sold under various trade names, e.g. Flomax, Urimax, Contiflo XL, Mesir LP, ProstaniL MR, Tamsin and Fokusin. Shown below is a chromatogram of the determination of the tamsulosin hydrochloride content according to the proprietary method.

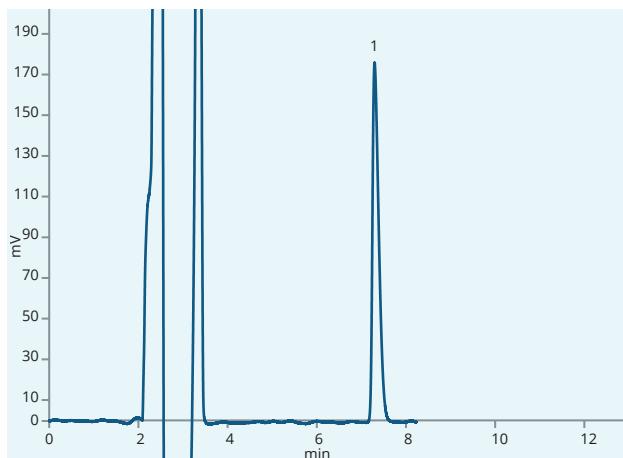

Standard mixture

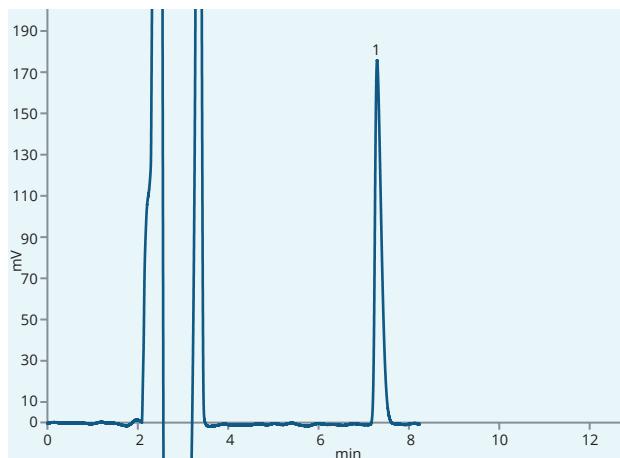

Drug sample

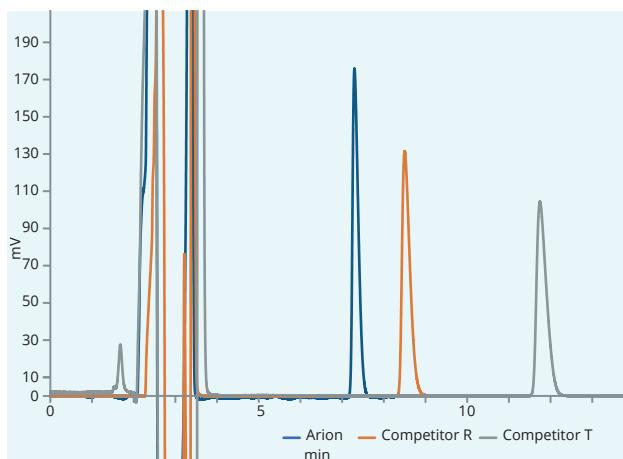


Comparison of fully porous particles


Column	ARION® Plus C18, 5.0 µm
Dimensions	250 mm × 4.6 mm
Part number	ARI-5720-LM46
Mobile phase	Acetate buffer : acetonitrile
Flow rate	1.0 ml/min
Temperature	30 °C
Detection	UV @225 nm
Analytes	1. Tamsulosin hydrochloride

Fluorinated compounds


This application shows the ARION® column overcomes a co-elution of two critical pairs of fluoro- and des-fluoro-compounds. Separation of these compounds is problematic in general.

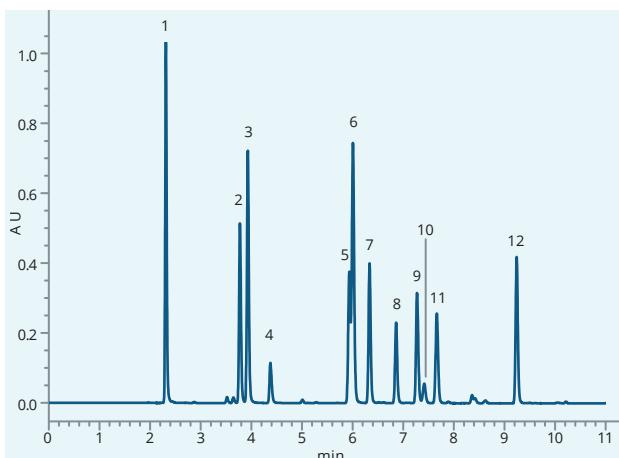

Sample on ARION® column

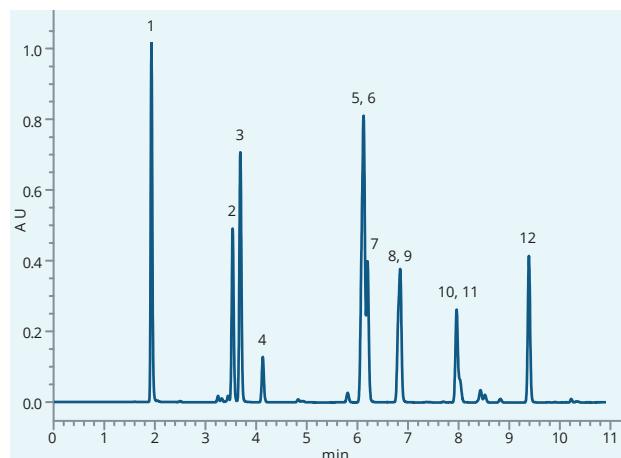

Sample on Competitive hybrid column TE

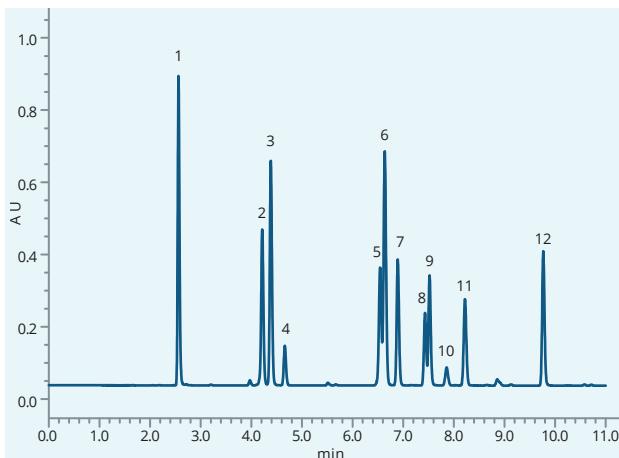


Sample on Competitive hybrid column TS


Column	ARION® Plus C18, 3.0 µm	
Dimensions	150 mm × 4.6 mm	
Part number	ARI-5720-IK46	
Mobile phase	A: 0.1% formic acid (dissolve 1 ml of formic acid in 1000 ml of Milli-Q water) B: ACN	
Gradient elution	Time	A (%)
	0	60
	9	20
	10	5
	14	5
	14.1	60
	15.5	60
Flow rate	1.0 ml/min	
Temperature	30 °C	
Detection	UV @275 nm	
Analytics	5. Fluoro-compound 6. Fluoro-compound 7. Des-fluoro-compound 8. Des-fluoro-compound All other compounds are confidential.	

Veterinary drugs


Tiamulin hydrogen fumarate is a semisynthetic drug with an antibacterial effect. It is used to treat animal diseases, such as swine dysentery (caused by *Brachyspira hyodysenteriae*), swine pneumonia or mycoplasmal arthritis. Tiamulin is also used for the prevention and treatment of chronic respiratory diseases in domestic chickens and turkeys.

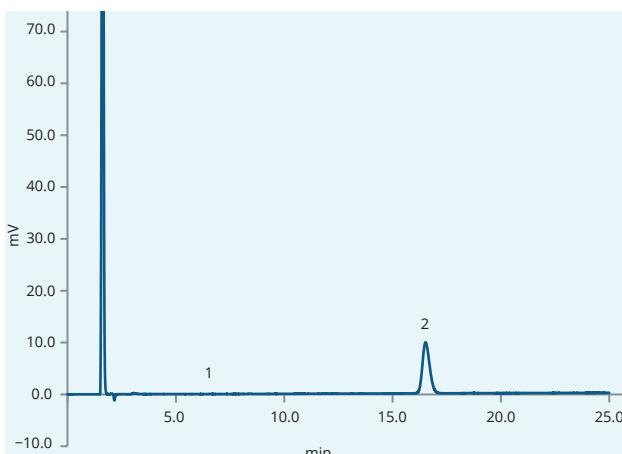

Sample – 2% premix on ARION® column

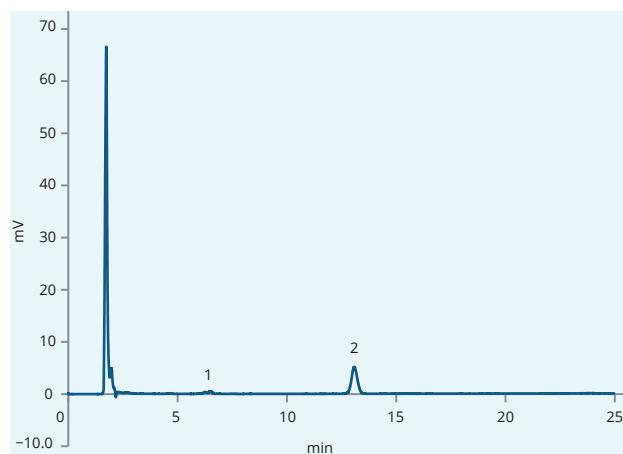

Sample – 2% premix on competitive column
(Competitor S)

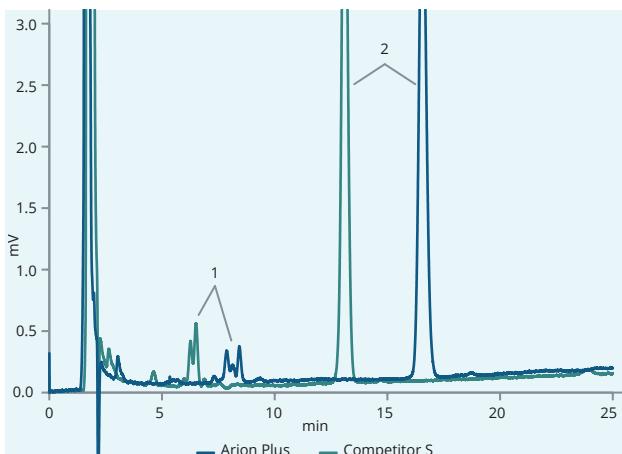


Detailed view on impurities


Column	ARION® Plus C18, 5.0 µm
Dimensions	250 mm × 4.6 mm
Part number	ARI-5720-LM46
Mobile phase	Confidential, optimized method of Czech Pharmacopoeia (2017, 6.0:1659)
Analytes	1. Impurities 2. Tiamulin hydrogen fumarate

Veterinary drugs

Trimetoprim and Sulfamethazine are veterinary drugs used to treat animals of various species with gastrointestinal and respiratory tract infections. This drug is used in diseases of various species of animals.

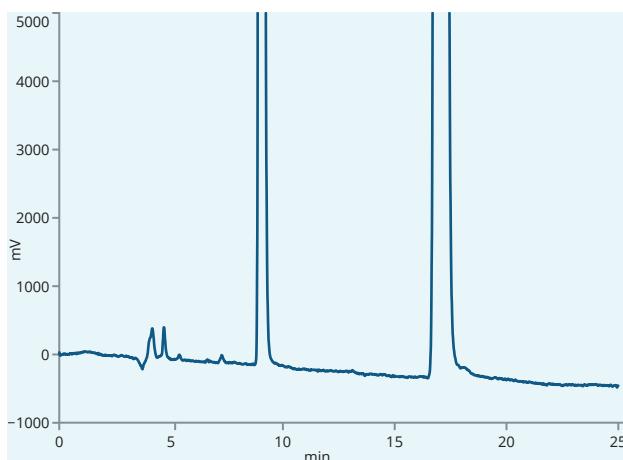

Standard on ARION® column

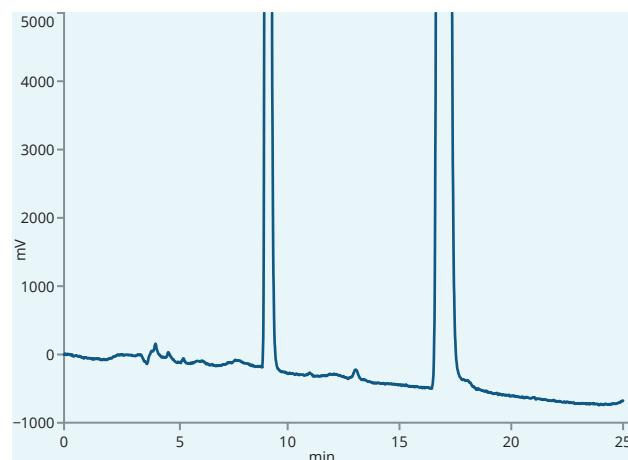


Drug sample

Column	ARION® Plus C18, 5.0 µm
Dimensions	250 mm × 4.6 mm
Part number	ARI-5720-LM46
Mobile phase	0.1% TEA : Methanol : ACN 80/10/10 (v/v/v) Isocratic elution
Flow rate	1.0 ml/min
Temperature	40 °C
Detection	UV @254 nm
Analytes	1. Trimetoprim 2. Sulfamethazine sodium

Furans in transformer oil

Furans analysis, together with an oil soluble metal deactivator, is an important analysis used to monitor the degradation of the winding insulation in the transformers. The presence of furans in transformer oils show the stage of the insulation degradation and a need for transformer replacement.

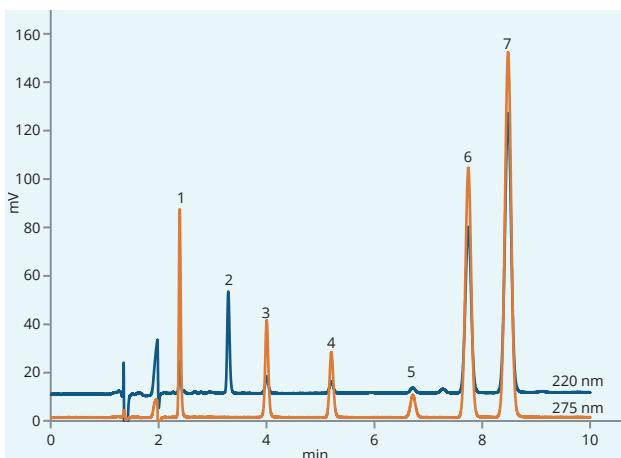

Mixture of furans and passivator in water


Column	ARION® Plus C18, 3.0 µm
Dimensions	150 mm × 4.6 mm
Part number	ARI-5720-IK46
Mobile phase	Ammonium acetate 20 mM, pH 8.5 (ammonia) : ACN 80/20 (v/v) Isocratic elution
Flow rate	1.0 ml/min
Temperature	30 °C
Detection	UV @220, 275 nm
Analyses	1. 5-Hydroxymethyl-2-furaldehyde (5HMF) 2. 2-Furfuryl alcohol (2FOL) 3. 2-Furaldehyde (2FAL) 4. 2-Acetyl furan (2ACF) 5. 5-Methylfurfural (5MEF) 6. + 7. Ciba® Irgamet® 39 isomers*

* Ciba® Irgamet® 39 isomers:
 N,N-bis(2-ethylhexyl)-4-methyl-1H-benzotriazol-1-amine
 N,N-bis(2-ethylhexyl)-5-methyl-1H-benzotriazol-1-amine

ARION® INDUSTRIAL HYGIENE APPLICATIONS

Aldehyde/Ketone DNPH derivatives

Carbonyl compounds are part of the group of parameters which are analyzed in the workplace. Occupational hygiene and contract laboratories mostly use the HPLC method for aldehydes and ketones analysis. HPLC separation requires the derivatization with 2,4-dinitrophenyl hydrazine.

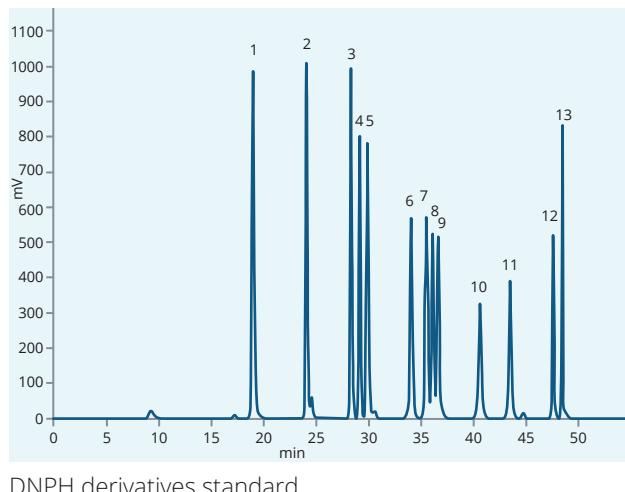


DNPH derivatives standard

Column	ARION® Plus C18, 5.0 µm
Dimensions	250 mm × 4.6 mm
Part number	ARI-5720-LM46
Mobile phase	Methanol : water
Flow rate	0.2 ml/min
Temperature	40 °C
Detection	UV @360 nm
Analytes	<ul style="list-style-type: none">1. Formaldehyde-2,4-DNPH2. Acetaldehyde-2,4-DNPH3. Acetone-2,4-DNPH4. Acrolein-2,4-DNPH5. Propionaldehyde-2,4-DNPH6. Crotonaldehyde-2,4-DNPH7. Methacrolein-2,4-DNPH8. 2-Butanone-2,4-DNPH9. Butyraldehyde-2,4-DNPH10. Benzaldehyde-2,4-DNPH11. Vernaldehyde-2,4-DNPH12. m-Tolualdehyde-2,4-DNPH13. Hexaldehyde-2,4-DNPH

Opioids and Tramadol and their metabolites by LC/MS

This application shows the LC/MS method for the most common opiates and their metabolites analyzed by toxicological labs.


Substance	Codeine, CAS Number 76-57-3 Morphine, CAS Number 57-27-2 6-O-Acetylmorphine, 6-Monoacetylmorphine, CAS Number 2784-73-8 Morphine-6-glucuronide, CAS Number 20290-10-2 Buprenorphine, CAS Number 52485-79-7 Dihydrocodeine, CAS Number 125-28-0 Fentanyl, CAS Number 437-38-7 Acetyl fentanyl, CAS Number 3258-84-2 Naloxone, CAS Number 465-65-6 Naltrexone, CAS Number 16590-41-3	Hydromorphone, CAS Number 466-99-9 Oxymorphone, CAS Number 76-41-5 Hydrocodone, CAS Number 125-29-1 Norbuprenorphine, CAS Number 78715-23-8 Norcodeine, CAS Number 467-15-2 Norfentanyl, CAS Number 1609-66-1 Oxycodone, CAS Number 76-42-6 Meperidine, Pethidine, CAS Number 57-42-1 Tramadol, CAS Number 27203-92-5 Methadone, CAS Number 76-99-3 EDDP, CAS Number 30223-73-5
------------------	---	---

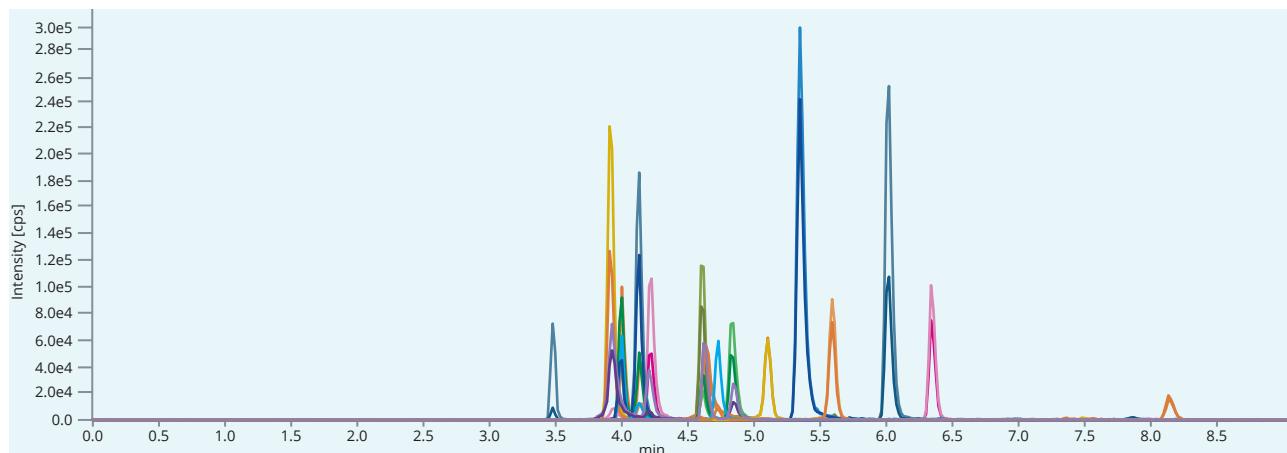


Standard mixture on ARION® column (50 mg/l)

Opioids and Tramadol and their metabolites by LC/MS


Column	ARION® Plus C18, 3 µm																		
Dimensions	50 mm × 3.0 mm																		
Part number	ARI-5720-IG30																		
Mobile phase	A: 1% ammonium formate in water B: Methanol : 1% ammonium formate in ACN 50/50 (v/v)																		
Gradient elution	<table border="1"> <thead> <tr> <th>Time</th> <th>A (%)</th> <th>B (%)</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>100</td> <td>0</td> </tr> <tr> <td>1</td> <td>100</td> <td>0</td> </tr> <tr> <td>6</td> <td>10</td> <td>90</td> </tr> <tr> <td>8</td> <td>10</td> <td>90</td> </tr> <tr> <td>8.1</td> <td>100</td> <td>0</td> </tr> </tbody> </table>	Time	A (%)	B (%)	0	100	0	1	100	0	6	10	90	8	10	90	8.1	100	0
Time	A (%)	B (%)																	
0	100	0																	
1	100	0																	
6	10	90																	
8	10	90																	
8.1	100	0																	
Flow rate	0.5 ml/min																		
Temperature	30 °C																		
Detection	MS/MS																		
Analyses	See MS/MS method																		

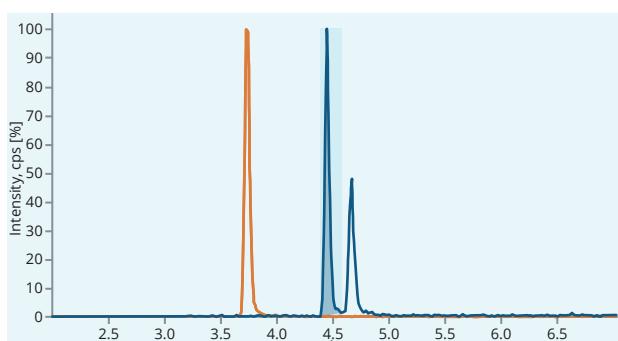


Codeine (300.1->152.0)

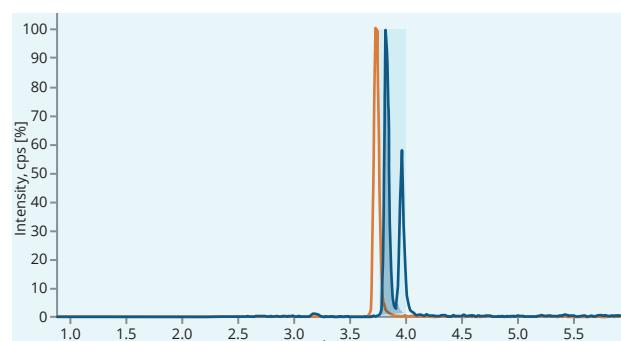

Morphine (286.1 -> 152.0)

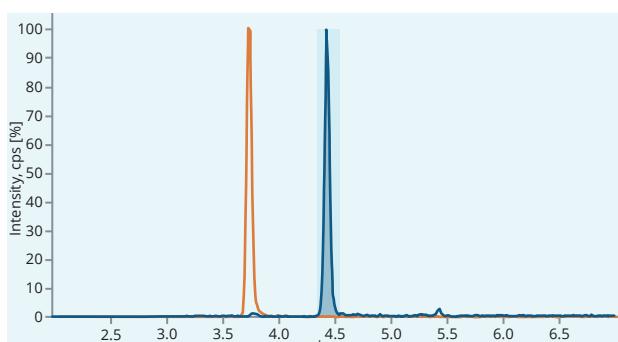


6-O-Acetylmorphine (328.1 -> 165.0)

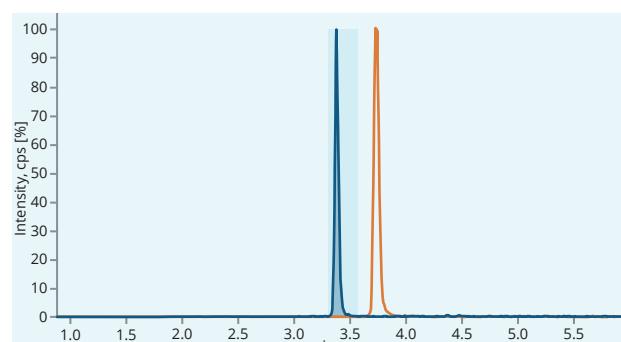


Morphine-6-glucuronide (462.2 -> 286.2)


Opioids and Tramadol and their metabolites by LC/MS

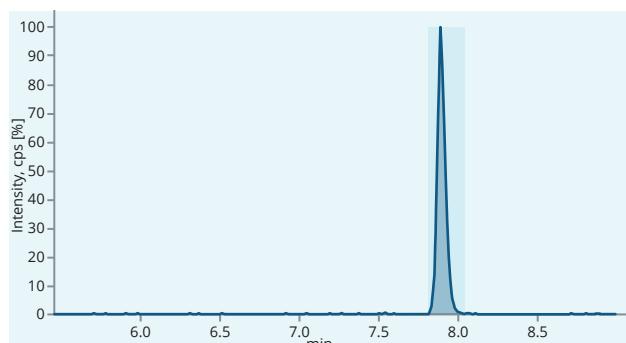


Buprenorphine (468.2 -> 396.0)

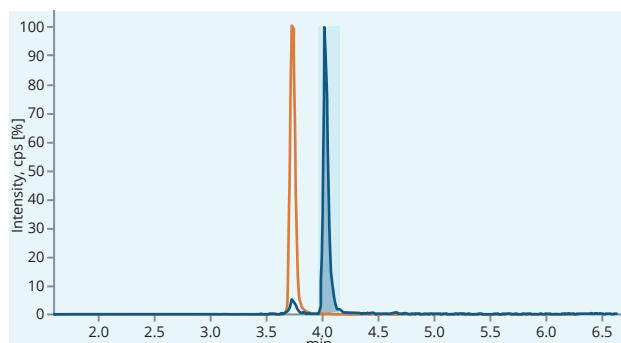


Dihydrocodeine (302.2 -> 199.2)

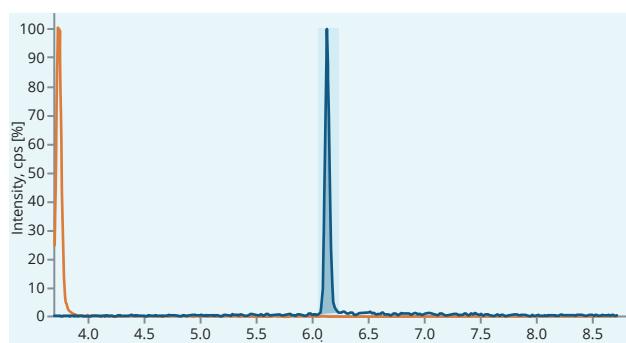


Fentanyl (337.2 -> 105.1)

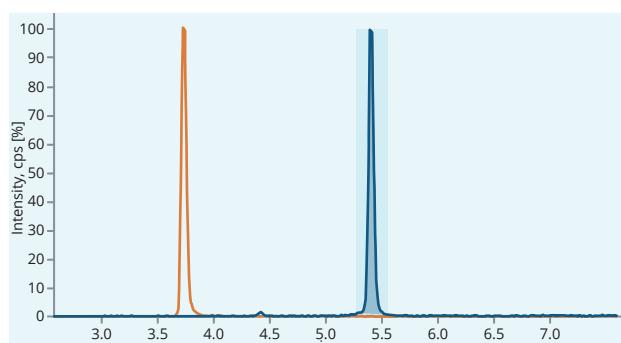


Naloxone (328.1 -> 212.1)

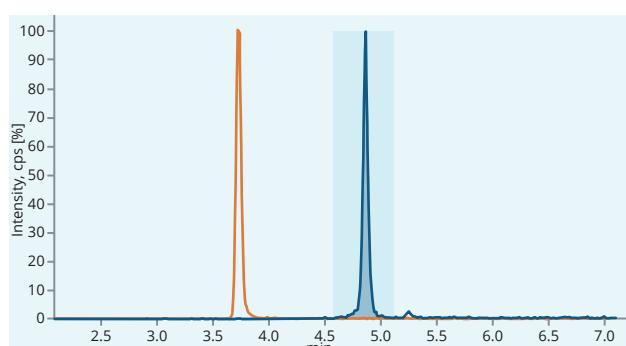


Naltrexone (342.1 -> 267.2)

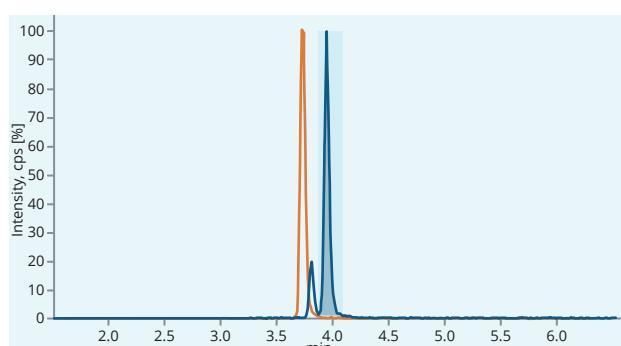

Hydromorphone (286.1 -> 185.0)





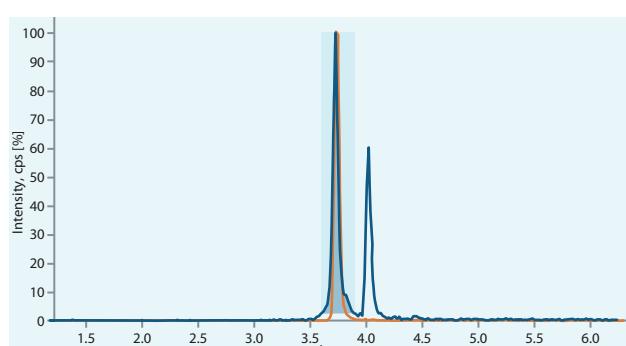


Oxymorphone (302.0 -> 227.1)

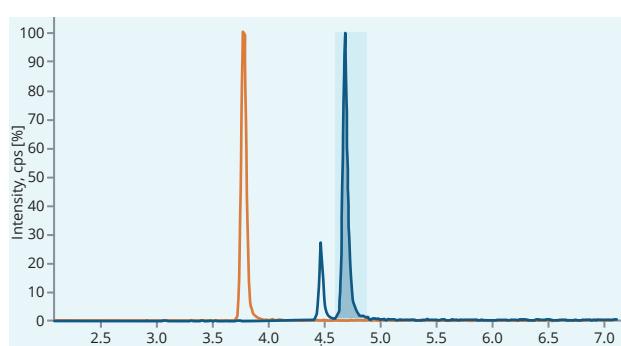

Hydrocodone (300.1 -> 199.0)

Opioids and Tramadol and their metabolites by LC/MS

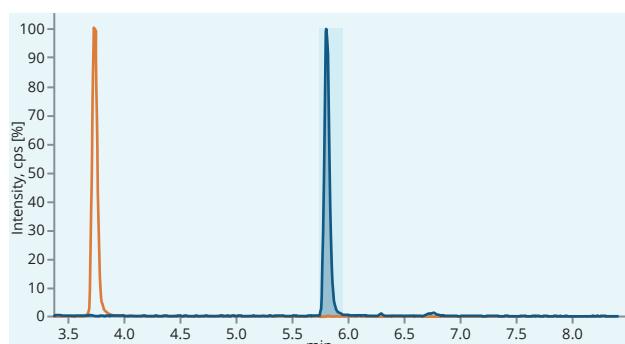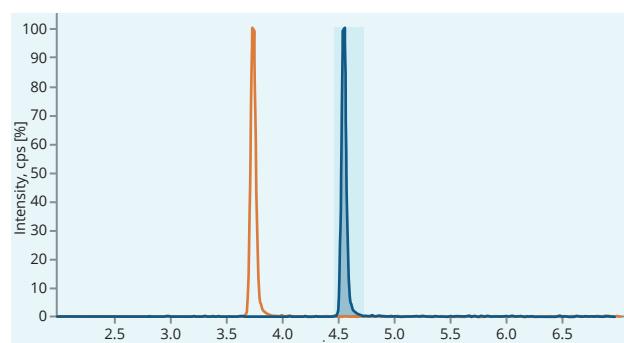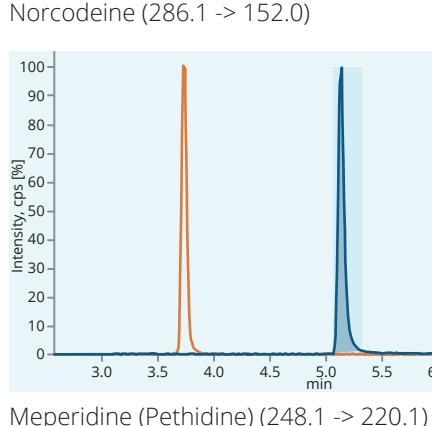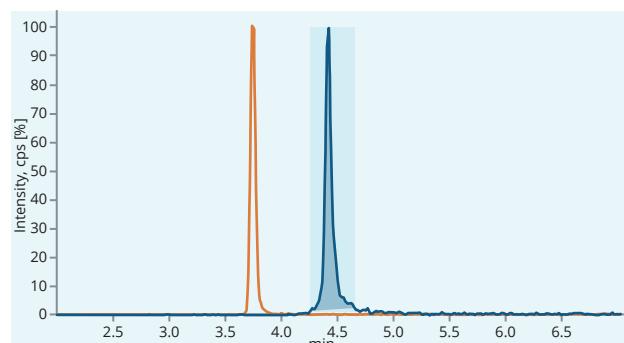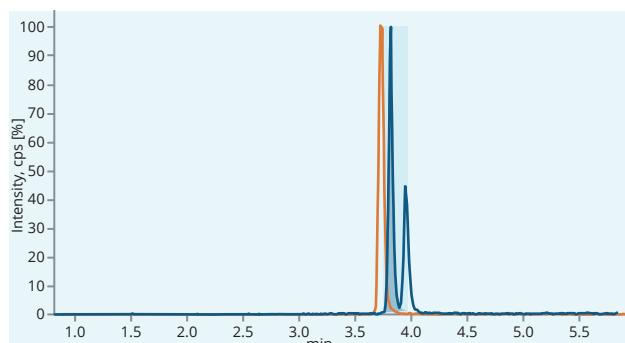

Opioids and Tramadol and their metabolites by LC/MS

MS/MS method


Compound name	Precursor Mass	Fragment mass	Type	Collision energy
Codeine	300.1	152.0	Quantifier	35 ± 15 eV
	300.1	165.1	Qualifier	35 ± 15 eV
Morphine	286.1	152.0	Quantifier	35 ± 15 eV
	286.1	165.1	Qualifier	35 ± 15 eV
6-O-Acetylmorphine	328.1	165.0	Quantifier	35 ± 15 eV
	328.1	211.0	Qualifier	35 ± 15 eV
Morphine-6-glucuronide	462.2	286.2	Qualifier	35 ± 15 eV
	462.2	201.1	Qualifier	35 ± 15 eV
Buprenorphine	468.2	396.0	Quantifier	35 ± 15 eV
	468.2	414.0	Qualifier	35 ± 15 eV
Dihydrocodeine	302.2	199.2	Quantifier	35 ± 15 eV
	302.2	171.2	Qualifier	35 ± 15 eV
Fentanyl	337.2	105.1	Quantifier	35 ± 15 eV
	337.2	188.2	Qualifier	35 ± 15 eV
Acetylfentanyl*	323.1	188.1	Quantifier	35 ± 15 eV
	323.1	105.1	Qualifier	35 ± 15 eV
Naloxone	328.1	212.1	Quantifier	35 ± 15 eV
	328.1	253.1	Qualifier	35 ± 15 eV
Naltrexone	342.1	267.2	Quantifier	35 ± 15 eV
	342.1	282.1	Qualifier	35 ± 15 eV
Hydromorphone	286.1	185.0	Quantifier	35 ± 15 eV
	286.1	157.0	Qualifier	35 ± 15 eV
Oxymorphone	302.0	227.1	Quantifier	35 ± 15 eV
	302.0	198.1	Qualifier	35 ± 15 eV
Hydrocodone	300.1	199.0	Quantifier	35 ± 15 eV
	300.1	128.0	Qualifier	35 ± 15 eV
Norbuprenorphine*	414.3	55.0	Quantifier	35 ± 15 eV
	414.3	83.0	Qualifier	35 ± 15 eV
Norcodeine	286.1	152.0	Quantifier	35 ± 15 eV
	286.1	165.0	Qualifier	35 ± 15 eV
Norfentanyl*	233.1	84.1	Quantifier	35 ± 15 eV
	233.1	150.1	Qualifier	35 ± 15 eV
Oxycodone	316.1	241.1	Quantifier	35 ± 15 eV
	316.1	256.1	Qualifier	35 ± 15 eV
Meperidine (Pethidine)	248.1	220.1	Quantifier	35 ± 15 eV
	248.1	174.0	Qualifier	35 ± 15 eV
Tramadol	264.1	58.1	Quantifier	35 ± 15 eV
	264.1	42.2	Qualifier	35 ± 15 eV
Methadone	310.1	265.0	Quantifier	35 ± 15 eV
	310.1	105.0	Qualifier	35 ± 15 eV
EDDP*	278.1	234.1	Quantifier	35 ± 15 eV
	278.1	186.1	Qualifier	35 ± 15 eV

* Not shown in chromatogram. Note: Internal standard: Morphine D6.

ARION® CANNABIS APPLICATIONS


Cannabinoids

Cannabinoids have become more and more popular thanks to their health effects and the decriminalisation of their use. Analytical columns that can offer a suitable resolution play an important role. The challenge is to achieve the separation of the critical pair – CBD and CBG.

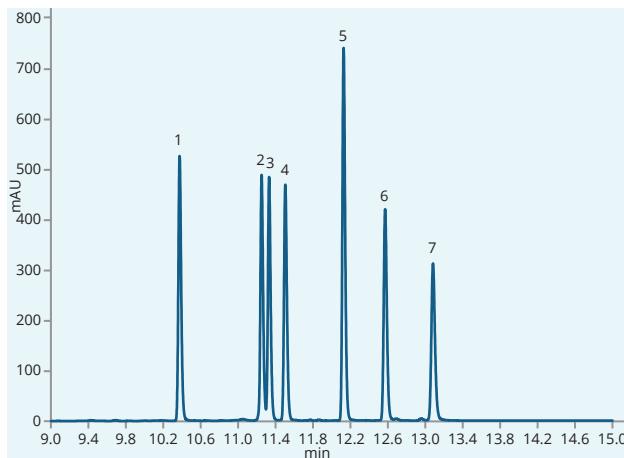

Standard on ARION® Plus C18, 1.7 µm

Columns	ARION® Plus C18, 1.7 µm		
Dimensions	100 mm × 2.1 mm		
Part numbers	ARI-5720-BI21		
Mobile phase	A: Water B: Acetonitrile		
Gradient elution	Time	A (%)	B (%)
	0	70	30
	1	70	30
	5	50	50
	10	10	90
	13	10	90
	14	70	30
	16	70	30
Flow rate	0.3 ml/min		
Temperature	30 °C		
Detection	DAD @220 nm		
Analytics	1. CBDV 2. CBG 3. CBD 4. THCV 5. CBN 6. THC 7. CBC		

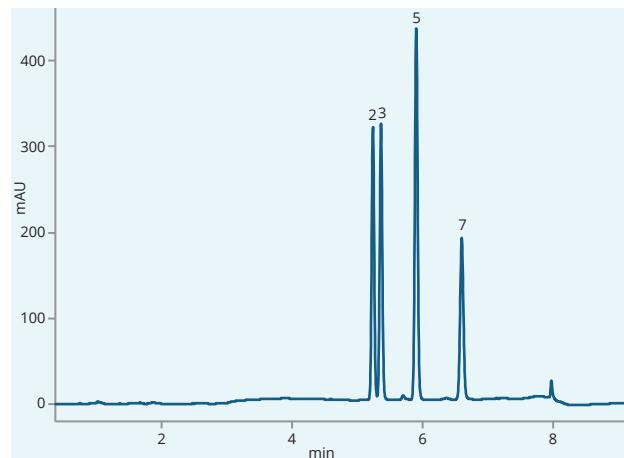

Fast method – standard on ARION® Plus C18, 3.0 µm

Columns	ARION® Plus C18, 3.0 µm		
Dimensions	150 mm × 4.6 mm		
Part numbers	ARI-5720-IK46		
Mobile phase	A: Acetonitrile B: Water with formic acid (0.1%)		
Gradient elution	Time	A (%)	B (%)
	0	30	70
	0.3	30	70
	2.3	100	0
	5.3	100	0
	8.3	30	70
	11.0	30	70
Flow rate	1.0 ml/min		
Temperature	40 °C		
Injection volume	20 µl		
Detection	DAD @220 nm		
Analytics	2. CBG 3. CBD 5. CBN 7. CBC		

Ordering information

UHPLC and LC/MS columns

1.7 µm ARION® all dimensions in mm						ARION® Guard Cartridges*
Phase	30 × 2.1	50 × 2.1	75 × 2.1	100 × 2.1	150 × 2.1	5 × 2.1
Plus C18	[Green] ARI-5720-BD21	ARI-5720-BG21	ARI-5720-BH21	ARI-5720-BI21	ARI-5720-BK21	AGS-5731-RA2
1.7 µm ARION® all dimensions in mm						ARION® Guard Cartridges*
Phase	50 × 3.0	75 × 3.0	100 × 3.0	150 × 3.0		
Plus C18	[Green] ARI-5720-BG30	ARI-5720-BH30	ARI-5720-BI30	ARI-5720-BK30	Inquire**	
1.7 µm ARION® all dimensions in mm						ARION® Guard Cartridges*
Phase	50 × 4.6	75 × 4.6	100 × 4.6	150 × 4.6	5 × 2.1	
Plus C18	[Green] ARI-5720-BG46	ARI-5720-BH46	ARI-5720-BI46	ARI-5720-BK46	AGS-5731-RA2	
2.2 µm ARION® all dimensions in mm						ARION® Guard Cartridges*
Phase	30 × 2.1	50 × 2.1	75 × 2.1	100 × 2.1	150 × 2.1	5 × 2.1
Plus C18	[Green] ARI-5720-ED21	ARI-5720-EG21	ARI-5720-EH21	ARI-5720-EI21	ARI-5720-EK21	AGS-5731-RB2
Polar C18	[Blue] ARI-5721-ED21	ARI-5721-EG21	ARI-5721-EH21	ARI-5721-EI21	ARI-5721-EK21	AGS-5731-RB2
Phenyl-Butyl	[Green] ARI-5735-ED21	ARI-5735-EG21	ARI-5735-EH21	ARI-5735-EI21	ARI-5735-EK21	AGS-5731-RB2
NH ₂	[Grey] ARI-5736-ED21	ARI-5736-EG21	ARI-5736-EH21	ARI-5736-EI21	ARI-5736-EK21	Inquire**
HILIC Plus	[Blue] ARI-5738-ED21	ARI-5738-EG21	ARI-5738-EH21	ARI-5738-EI21	ARI-5738-EK21	AGS-5731-HB2
Si	[Grey] ARI-5739-ED21	ARI-5739-EG21	ARI-5739-EH21	ARI-5739-EI21	ARI-5739-EK21	AGS-5731-NB2
2.2 µm ARION® all dimensions in mm						ARION® Guard Cartridges*
Phase	50 × 3.0	75 × 3.0	100 × 3.0	150 × 3.0	5 × 2.1	
Plus C18	[Green] ARI-5720-EG30	ARI-5720-EH30	ARI-5720-EI30	ARI-5720-EK30	AGS-5731-RB2	
Polar C18	[Blue] ARI-5721-EG30	ARI-5721-EH30	ARI-5721-EI30	ARI-5721-EK30	AGS-5731-RB2	
Phenyl-Butyl	[Green] ARI-5735-EG30	ARI-5735-EH30	ARI-5735-EI30	ARI-5735-EK30	AGS-5731-RB2	
NH ₂	[Grey] ARI-5736-EG30	ARI-5736-EH30	ARI-5736-EI30	ARI-5736-EK30	Inquire**	
HILIC Plus	[Blue] ARI-5738-EG30	ARI-5738-EH30	ARI-5738-EI30	ARI-5738-EK30	AGS-5731-HB2	
Si	[Grey] ARI-5739-EG30	ARI-5739-EH30	ARI-5739-EI30	ARI-5739-EK30	AGS-5731-NB2	
2.2 µm ARION® all dimensions in mm						ARION® Guard Cartridges*
Phase	50 × 4.6	75 × 4.6	100 × 4.6	150 × 4.6	5 × 4.0	
Plus C18	[Green] ARI-5720-EG46	ARI-5720-EH46	ARI-5720-EI46	ARI-5720-EK46	AGS-5731-RC4	
Polar C18	[Blue] ARI-5721-EG46	ARI-5721-EH46	ARI-5721-EI46	ARI-5721-EK46	AGS-5731-RC4	
Phenyl-Butyl	[Green] ARI-5735-EG46	ARI-5735-EH46	ARI-5735-EI46	ARI-5735-EK46	AGS-5731-RC4	
NH ₂	[Grey] ARI-5736-EG46	ARI-5736-EH46	ARI-5736-EI46	ARI-5736-EK46	Inquire**	
HILIC Plus	[Blue] ARI-5738-EG46	ARI-5738-EH46	ARI-5738-EI46	ARI-5738-EK46	Inquire**	
Si	[Grey] ARI-5739-EG46	ARI-5739-EH46	ARI-5739-EI46	ARI-5739-EK46	Inquire**	

Ordering information

Analytical columns

3 µm ARION®						ARION® Guard Cartridges*
Phase	50 × 2.1	75 × 2.1	100 × 2.1	150 × 2.1	250 × 2.1	5 × 4.0
Plus C18	[Green] ARI-5720-IG21	ARI-5720-IH21	ARI-5720-II21	ARI-5720-IK21	ARI-5720-IM21	AGS-5731-RC2
Polar C18	[Blue] ARI-5721-IG21	ARI-5721-IH21	ARI-5721-II21	ARI-5721-IK21	-	AGS-5731-RC2
C8	[Green] ARI-5734-IG21	ARI-5734-IH21	ARI-5734-II21	ARI-5734-IK21	-	AGS-5731-RC2
Phenyl-Butyl	[Green] ARI-5735-IG21	ARI-5735-IH21	ARI-5735-II21	ARI-5735-IK21	-	AGS-5731-RC2
NH ₂	[Grey] ARI-5736-IG21	ARI-5736-IH21	ARI-5736-II21	ARI-5736-IK21	-	Inquire**
CN	[Grey] ARI-5737-IG21	ARI-5737-IH21	ARI-5737-II21	ARI-5737-IK21	-	Inquire**
HILIC Plus	[Blue] ARI-5738-IG21	ARI-5738-IH21	ARI-5738-II21	ARI-5738-IK21	-	AGS-5731-HC2
Si	[Grey] ARI-5739-IG21	ARI-5739-IH21	ARI-5739-II21	ARI-5739-IK21	-	AGS-5731-NC2

3 µm ARION®						ARION® Guard Cartridges*
Phase	50 × 3.0	75 × 3.0	100 × 3.0	150 × 3.0	250 × 3.0	5 × 4.0
Plus C18	[Green] ARI-5720-IG30	ARI-5720-IH30	ARI-5720-II30	ARI-5720-IK30	ARI-5720-IM30	AGS-5731-RC4
Polar C18	[Blue] ARI-5721-IG30	ARI-5721-IH30	ARI-5721-II30	ARI-5721-IK30	ARI-5721-IM30	AGS-5731-RC4
C8	[Green] ARI-5734-IG30	ARI-5734-IH30	ARI-5734-II30	ARI-5734-IK30	-	AGS-5731-RC4
Phenyl-Butyl	[Green] ARI-5735-IG30	ARI-5735-IH30	ARI-5735-II30	ARI-5735-IK30	ARI-5735-IM30	AGS-5731-RC4
NH ₂	[Grey]	-	ARI-5736-II30	ARI-5736-IK30	-	Inquire**
CN	[Grey]	-	ARI-5737-II30	ARI-5737-IK30	-	Inquire**
HILIC Plus	[Blue] ARI-5738-IG30	ARI-5738-IH30	ARI-5738-II30	ARI-5738-IK30	-	AGS-5731-HC4
Si	[Grey] ARI-5739-IG30	ARI-5739-IH30	ARI-5739-II30	ARI-5739-IK30	-	AGS-5731-NC4

3 µm ARION®							ARION® Guard Cartridges*
Phase	50 × 4.6	75 × 4.6	100 × 4.6	125 × 4.6	150 × 4.6	250 × 4.6	5 × 4.0
Plus C18	[Green] ARI-5720-IG46	ARI-5720-IH46	ARI-5720-II46	ARI-5720-IJ46	ARI-5720-IK46	ARI-5720-IM46	AGS-5731-RC4
Polar C18	[Blue] ARI-5721-IG46	ARI-5721-IH46	ARI-5721-II46	-	ARI-5721-IK46	ARI-5721-IM46	AGS-5731-RC4
C8	[Green] ARI-5734-IG46	ARI-5734-IH46	ARI-5734-II46	-	ARI-5734-IK46	ARI-5734-IM46	AGS-5731-RC4
Phenyl-Butyl	[Green] ARI-5735-IG46	ARI-5735-IH46	ARI-5735-II46	-	ARI-5735-IK46	ARI-5735-IM46	AGS-5731-RC4
NH ₂	[Grey] ARI-5736-IG46	ARI-5736-IH46	ARI-5736-II46	-	ARI-5736-IK46	ARI-5736-IM46	Inquire**
CN	[Grey] ARI-5737-IG46	-	ARI-5737-II46	-	ARI-5737-IK46	-	Inquire**
HILIC Plus	[Blue] ARI-5738-IG46	ARI-5738-IH46	ARI-5738-II46	-	ARI-5738-IK46	-	AGS-5731-HC4
Si	[Grey] ARI-5739-IG46	ARI-5739-IH46	ARI-5739-II46	-	ARI-5739-IK46	ARI-5739-IM46	AGS-5731-NC4

* ARION® Guard cartridges require ARION® Guard Holder p/n AGS-5731-000 (supplied without cartridges).

**The use of appropriate guard cartridge depends on the application. Please contact us.

Ordering information

Analytical columns

5 µm ARION®					ARION® Guard Cartridges*
Phase	30 × 2.1	50 × 2.1	100 × 2.1	150 × 2.1	5 × 4.0
Plus C18	ARI-5720-LD21	ARI-5720-LG21	ARI-5720-LI21	ARI-5720-LK21	AGS-5731-RD2
Polar C18	ARI-5721-LD21	ARI-5721-LG21	ARI-5721-LI21	ARI-5721-LK21	AGS-5731-RD2
C8	—	—	—	ARI-5734-LK21	AGS-5731-RD2
Biphenyl	ARI-5868-LD21	ARI-5868-LG21	ARI-5868-LI21	ARI-5868-LK21	AGS-5731-RD2
Phenyl-Butyl	ARI-5735-LD21	ARI-5735-LG21	ARI-5735-LI21	ARI-5735-LK21	AGS-5731-RD2
NH ₂	—	—	—	ARI-5736-LK21	Inquire**
CN	—	—	—	ARI-5737-LK21	Inquire**
HILIC Plus	ARI-5738-LD21	ARI-5738-LG21	ARI-5738-LI21	ARI-5738-LK21	AGS-5731-HD2
Si	ARI-5739-LD21	ARI-5739-LG21	ARI-5739-LI21	ARI-5739-LK21	AGS-5731-ND2

5 µm ARION®					ARION® Guard Cartridges*
Phase	30 × 3.0	50 × 3.0	75 × 3.0	100 × 3.0	5 × 4.0
Plus C18	ARI-5720-LD30	ARI-5720-LG30	ARI-5720-LH30	ARI-5720-LI30	AGS-5731-RD4
Polar C18	ARI-5721-LD30	ARI-5721-LG30	ARI-5721-LH30	ARI-5721-LI30	AGS-5731-RD4
C8	—	ARI-5734-LG30	—	ARI-5734-LI30	AGS-5731-RD4
Biphenyl	ARI-5868-LD30	ARI-5868-LG30	ARI-5868-LH30	ARI-5868-LI30	AGS-5731-RC4
Phenyl-Butyl	ARI-5735-LD30	ARI-5735-LG30	ARI-5735-LH30	ARI-5735-LI30	AGS-5731-RC4
NH ₂	—	ARI-5736-LG30	ARI-5736-LH30	ARI-5736-LI30	Inquire**
CN	—	ARI-5737-LG30	ARI-5737-LH30	ARI-5737-LI30	Inquire**
HILIC Plus	ARI-5738-LD30	ARI-5738-LG30	ARI-5738-LH30	ARI-5738-LI30	AGS-5731-HD4
Si	ARI-5739-LD30	ARI-5739-LG30	ARI-5739-LH30	ARI-5739-LI30	AGS-5731-ND4
SAX	—	ARI-5806-LG30	—	ARI-5806-LI30	—
SCX	—	ARI-5799-LG30	—	ARI-5799-LI30	—

5 µm ARION®					ARION® Guard Cartridges*
Phase	125 × 3.0	150 × 3.0	250 × 3.0	5 × 4.0	
Plus C18	ARI-5720-LJ30	ARI-5720-LK30	—	AGS-5731-RD4	
Polar C18	—	ARI-5721-LK30	—	AGS-5731-RD4	
C8	—	ARI-5734-LK30	ARI-5734-LM30	AGS-5731-RD4	
Biphenyl	ARI-5868-LJ30	ARI-5868-LK30	ARI-5868-LM30	AGS-5731-RC4	
Phenyl-Butyl	—	ARI-5735-LK30	—	AGS-5731-RC4	
NH ₂	—	ARI-5736-LK30	—	Inquire**	
CN	—	ARI-5737-LK30	—	Inquire**	
HILIC Plus	—	ARI-5738-LK30	—	AGS-5731-HD4	
Si	—	ARI-5739-LK30	—	AGS-5731-ND4	
SAX	—	ARI-5806-LK30	ARI-5806-LM30	—	
SCX	—	ARI-5799-LK30	ARI-5799-LM30	—	

* ARION® Guard cartridges require ARION® Guard Holder p/n AGS-5731-000 (supplied without cartridges).

**The use of appropriate guard cartridge depends on the application. Please contact us.



Ordering information

Analytical columns

5 µm ARION®					ARION® Guard Cartridges*
Phase	125 × 4.0	30 × 4.6	50 × 4.6	75 × 4.6	5 × 4.0
Plus C18	ARI-5720-LJ40	ARI-5720-LD46	ARI-5720-LG46	ARI-5720-LH46	AGS-5731-RD4
Polar C18	ARI-5721-LJ40	ARI-5721-LD46	ARI-5721-LG46	ARI-5721-LH46	AGS-5731-RD4
C8	ARI-5734-LJ40	-	-	-	AGS-5731-RD4
Biphenyl	ARI-5868-LJ40	ARI-5868-LD46	ARI-5868-LG46	ARI-5868-LH46	AGS-5731-RD4
Phenyl-Butyl	-	-	-	-	AGS-5731-RD4
NH ₂	-	-	-	-	Inquire**
CN	-	-	-	-	Inquire**
HILIC Plus	-	ARI-5738-LD46	ARI-5738-LG46	ARI-5738-LH46	AGS-5731-HD4
Si	-	ARI-5739-LD46	ARI-5739-LG46	ARI-5739-LH46	AGS-5731-ND4
SAX	-	-	ARI-5806-LG46	-	Inquire
SCX	-	-	ARI-5799-LG46	-	Inquire

5 µm ARION®					ARION® Guard Cartridges*
Phase	100 × 4.6	125 × 4.6	150 × 4.6	250 × 4.6	5 × 4.0
Plus C18	ARI-5720-LI46	ARI-5720-LJ46	ARI-5720-LK46	ARI-5720-LM46	AGS-5731-RD4
Polar C18	ARI-5721-LI46	-	ARI-5721-LK46	ARI-5721-LM46	AGS-5731-RD4
C8	ARI-5734-LI46	ARI-5734-LJ46	ARI-5734-LK46	ARI-5734-LM46	AGS-5731-RD4
Biphenyl	ARI-5868-LI46	ARI-5868-LJ46	ARI-5868-LK46	ARI-5868-LM46	AGS-5731-RD4
Phenyl-Butyl	ARI-5735-LI46	-	ARI-5735-LK46	ARI-5735-LM46	AGS-5731-RD4
NH ₂	ARI-5736-LI46	-	ARI-5736-LK46	ARI-5736-LM46	Inquire**
CN	ARI-5737-LI46	-	ARI-5737-LK46	ARI-5737-LM46	Inquire**
HILIC Plus	ARI-5738-LI46	-	ARI-5738-LK46	ARI-5738-LM46	AGS-5731-HD4
Si	ARI-5739-LI46	-	ARI-5739-LK46	ARI-5739-LM46	AGS-5731-ND4
SAX	ARI-5806-LI46	-	ARI-5806-LK46	ARI-5806-LM46	Inquire
SCX	ARI-5799-LI46	-	ARI-5799-LK46	ARI-5799-LM46	Inquire

Note: Other dimensions on request.

- * ARION® Guard cartridges require ARION® Guard Holder p/n AGS-5731-000 (supplied without cartridges).
- ** The use of appropriate guard cartridge depends on the application. Please contact us.

ARION® column test mixture 1 for RP columns

p/n ARI-MIX-1

4 components in Acetonitrile / Water (75/25), 1 ml ampoule

Uracil	[CAS:66-22-8]	20 mg/l
Acetophenone	[CAS:98-86-2]	200 mg/l
Toluene	[CAS:108-88-3]	10000 mg/l
Naphthalene	[CAS:91-20-3]	9000 mg/l

ARION® column test mixture 5 for DIOL/HILIC phases

p/n ARI-MIX-5

3 components in Acetonitrile ampoule

Acenaphthene	[CAS:108-88-3]	600 mg/l
Uracil	[CAS:66-22-8]	100 mg/l
Cytosine	[CAS:71-30-7]	200 mg/l

ARION® column test mixture 2

p/n ARI-MIX-2

7 components in Methanol, 1 ml ampoule

Uracil	[CAS:66-22-8]	200 mg/l
Aniline	[CAS:62-53-3]	1000 mg/l
Phenol	[CAS:108-95-2]	2000 mg/l
N,N-Dimethylaniline	[CAS:121-69-7]	400 mg/l
4-Ethylaniline	[CAS:589-16-2]	2000 mg/l
Toluene	[CAS:108-88-3]	10000 mg/l
Ethylbenzene	[CAS:100-41-4]	10000 mg/l

Ordering information

Semi-preparative and preparative columns

5 µm ARION® all dimensions in mm						ARION® Guard Cartridges
Phase	250 × 10	50 × 21.2	100 × 21.2	150 × 21.2	250 × 21.2	
Plus C18	ARI-5720-LM1X	ARI-5720-LG2Y	ARI-5720-LI2Y	ARI-5720-LK2Y	ARI-5720-LM2Y	PGS-5856-UD9**
Polar C18	ARI-5721-LM1X	ARI-5721-LG2Y	ARI-5721-LI2Y	ARI-5721-LK2Y	ARI-5721-LM2Y	Inquire*
Phenyl-Butyl	-	-	-	-	ARI-5735-LM2Y	Inquire*
Si	ARI-5739-LM1X	ARI-5739-LG2Y	ARI-5739-LI2Y	ARI-5739-LK2Y	ARI-5739-LM2Y	PGS-5856-VD9**

Preparative columns

5 µm ARION® all dimensions in mm					ARION® Guard Cartridges
Phase	100 × 30	150 × 30	250 × 30	250 × 50	
Plus C18	ARI-5720-LI3X	ARI-5720-LK3X	ARI-5720-LM3X	ARI-5720-LM5X	Inquire*
Polar C18	ARI-5721-LI3X	ARI-5721-LK3X	ARI-5721-LM3X	ARI-5721-LM5X	Inquire*
Phenyl-Butyl	-	-	ARI-5735-LM3X	ARI-5735-LM5X	Inquire*
Si	ARI-5739-LI3X	ARI-5739-LK3X	ARI-5739-LM3X	ARI-5739-LM5X	Inquire*

* The use of appropriate guard cartridge depends on the application. Please contact us.

**This guard cartridge requires a Preparative Guard Holder p/n PGS-5856-000



Semi-preparative column 250 × 10 mm



Preparative column 250 × 21.2 mm



Preparative column 250 × 30 mm



Preparative column 250 × 50 mm

Ordering information

Preparative columns

10 µm ARION® all dimensions in mm					ARION® Guard Cartridges
Phase	150 × 4.6	250 × 4.6	150 × 10	250 × 10	
Plus C18	ARI-5720-PK46	ARI-5720-PM46	ARI-5720-PK1X	ARI-5720-PM1X	Inquire*
Polar C18	ARI-5721-PK46	ARI-5721-PM46	ARI-5721-PK1X	ARI-5721-PM1X	Inquire*
Si	-	-	-	ARI-5739-PM1X	Inquire*

10 µm ARION® all dimensions in mm					ARION® Guard Cartridges
Phase	50 × 21.2	100 × 21.2	150 × 21.2	250 × 21.2	
Plus C18	ARI-5720-PG2Y	ARI-5720-PI2Y	ARI-5720-PK2Y	ARI-5720-PM2Y	Inquire*
Polar C18	ARI-5721-PG2Y	ARI-5721-PI2Y	ARI-5721-PK2Y	ARI-5721-PM2Y	Inquire*
Si	ARI-5739-PG2Y	ARI-5739-PI2Y	ARI-5739-PK2Y	ARI-5739-PM2Y	Inquire*

10 µm ARION® all dimensions in mm					ARION® Guard Cartridges
Phase	100 × 30	150 × 30	250 × 30	250 × 50	
Plus C18	ARI-5720-PI3X	ARI-5720-PK3X	ARI-5720-PM3X	ARI-5720-PM5X	Inquire*
Polar C18	ARI-5721-PI3X	ARI-5721-PK3X	ARI-5721-PM3X	ARI-5721-PM5X	Inquire*
Si	ARI-5739-PI3X	ARI-5739-PK3X	ARI-5739-PM3X	ARI-5739-PM5X	Inquire*

* The use of appropriate guard cartridge depends on the application. Please contact us.

Ordering information

Preparative columns

15 µm ARION® all dimensions in mm					ARION® Guard Cartridges
Phase	150 × 4.6	250 × 4.6	150 × 10	250 × 10	
Plus C18	ARI-5720-QK46	ARI-5720-QM46	ARI-5720-QK1X	ARI-5720-QM1X	Inquire*
Polar C18	ARI-5721-QK46	ARI-5721-QM46	ARI-5721-QK1X	ARI-5721-QM1X	Inquire*

15 µm ARION® all dimensions in mm					ARION® Guard Cartridges
Phase	50 × 21.2	100 × 21.2	150 × 21.2	250 × 21.2	
Plus C18	ARI-5720-QG2Y	ARI-5720-QI2Y	ARI-5720-QK2Y	ARI-5720-QM2Y	Inquire*
Polar C18	ARI-5721-QG2Y	ARI-5721-QI2Y	ARI-5721-QK2Y	ARI-5721-QM2Y	Inquire*

15 µm ARION® all dimensions in mm					ARION® Guard Cartridges
Phase	50 × 30	100 × 30	150 × 30	250 × 30	
Plus C18	ARI-5720-QG3X	ARI-5720-QI3X	ARI-5720-QK3X	ARI-5720-QM3X	Inquire*
Polar C18	ARI-5721-QG3X	ARI-5721-QI3X	ARI-5721-QK3X	ARI-5721-QM3X	Inquire*


Note: Bulk media available on request for 10 and 15 µm particles, in quantities: 10 g, 100 g, 1 kg.

* The use of appropriate guard cartridge depends on the application. Please contact us.



Product support

Not found the information you require? The ARION® website www.arionchromatography.com serves as your support source.



Application database

The ARION® website has a search engine to find an application based on different keywords, e.g. compound name, trivial name, formula etc.



Product selection guide

The section catalogue offers you text engine as well as sorting the required HPLC columns based on various parameters (column dimensions, particle size, surface chemistry, ...).



Distributor finder

The ARION® website includes a world map with an active finder of your distributor, who will support you with technical and price information.



Certificate download

If you cannot find your column certificate, please contact your local distributor or download the certificate from the Downloads section.



ARION® BIO



ARION® BIO columns have been developed for the protein, polypeptide and peptide characterisation and purification. They are offered with C18 and C4 stationary phases. ARION® C18-BIO phase is intended to separate weakly hydrophobic oligopeptides and peptides up to 50 kDa. ARION® C4-BIO HPLC columns are designed for highly hydrophobic proteins and polypeptides from 50 to 150 kDa.

- Biomolecule separation up to 150 kDa.
- Pre-columns with corresponding media.
- Scale-up to 15 µm.

ARION® BIO Silicagel

Particle size	5 µm	3 µm
Metal content	<20 ppm	<20 ppm
Temperature stability	60 °C*	60 °C*
Mean particle diameter	5.0 ± 0.3 µm	3.0 ± 0.2 µm

* Depends on mobile phase used and silica bonding.

ARION® BIO phases	Particle size (µm)	Pore size (Å)	Surface area (m²/g)	Carbon load	pH stability	Endcapping	100% aqueous mobile phase	USP code
C18-BIO	3.5	300	110	11 %	1.5 to 7.5	Single-step	×	L1
C4-BIO	3.5	300	110	4.5 %	1.5 to 7.5	Single-step	×	L26

Ordering information

Peptides and oligopeptides columns

ARION® BIO C18				ARION® Guard Cartridges*
all dimensions in mm				
Phase	100 × 4.6	150 × 4.6	250 × 4.6	
3 µm	ARI-5840-II46	ARI-5840-IK46	ARI-5840-IM46	AGS-5731-BC4
5 µm	ARI-5840-LI46	ARI-5840-LK46	ARI-5840-LM46	AGS-5731-BD4


ARION® BIO C18				ARION® Guard Cartridges*
all dimensions in mm				
Phase	100 × 3.0	150 × 3.0	50 × 2.1	150 × 2.1
3 µm	—	—	ARI-5840-IG21	ARI-5840-IK21
5 µm	ARI-5840-LI30	ARI-5840-LK30	—	ARI-5840-LK21 AGS-5731-BD2

Proteins and polypeptides

ARION® BIO C4				ARION® Guard Cartridges*
all dimensions in mm				
Phase	50 × 4.6	100 × 4.6	150 × 4.6	250 × 4.6
5 µm	ARI-5846-LG46	ARI-5846-LI46	ARI-5846-LK46	ARI-5846-LM46 AGS-5731-BD4

ARION® BIO C4				ARION® Guard Cartridges*
all dimensions in mm				
Phase	50 × 2.1	150 × 2.1	250 × 2.1	
5 µm	ARI-5846-LG21	ARI-5846-LK21	ARI-5846-LM21	AGS-5731-BD2

* ARION® Guard cartridges require ARION® Guard Holder p/n AGS-5731-000 (supplied without cartridges).

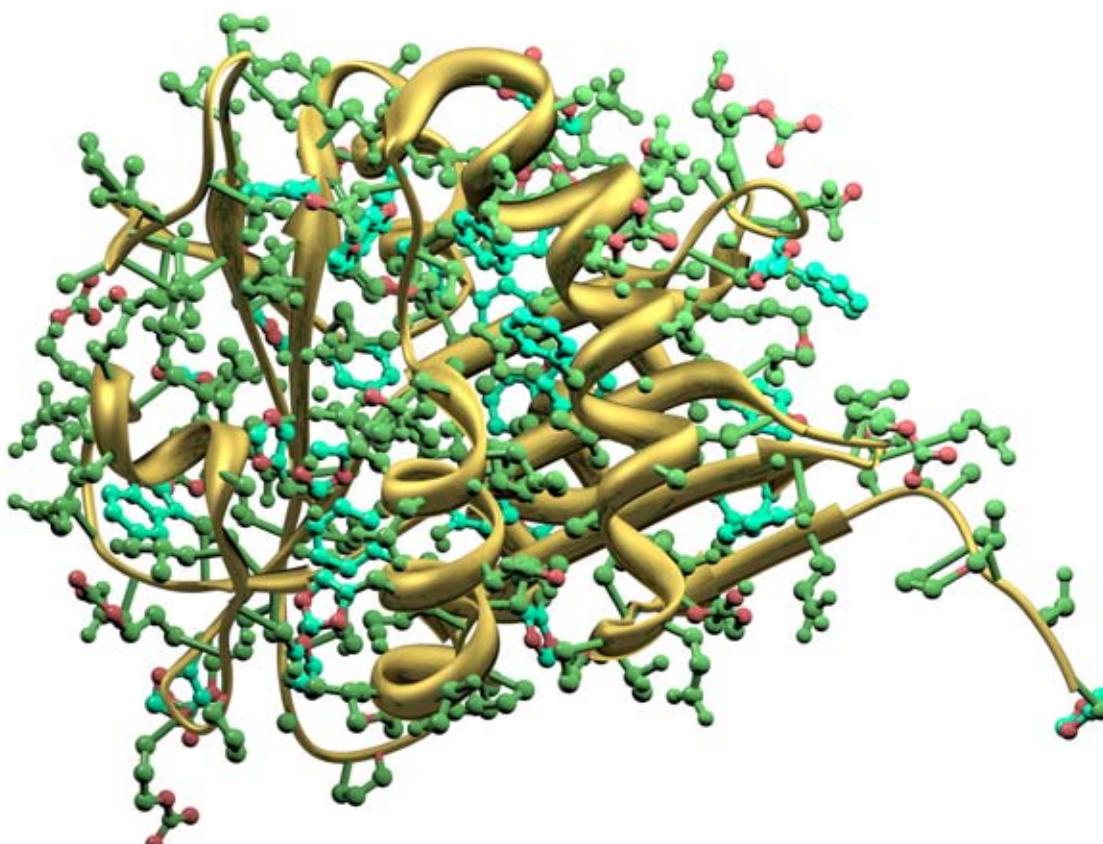


Lactoferrin in bovine milk

Lactoferrin (LT) is a glycoprotein, which is one of the group of transferrins. It is an iron-binding protein with a mass of 80 kDa. Lactoferrin has microbial properties against many microorganisms (bacteria, viruses and fungi, including parasites). It is one of the non-specific components of the immune system and has anticancer and anti-inflammatory properties.

Lactoferrin is widely represented in various animal fluids, mainly milk, saliva and tears. It is separated from bovine milk to produce this key ingredients of infant formulas. Lactoferrin is also used as a food supplement to support the natural immune system, gut microbiome and healthy skin.

Substance	Lactoferrin (LT)
Synonym	Lactotransferrin (LTF)

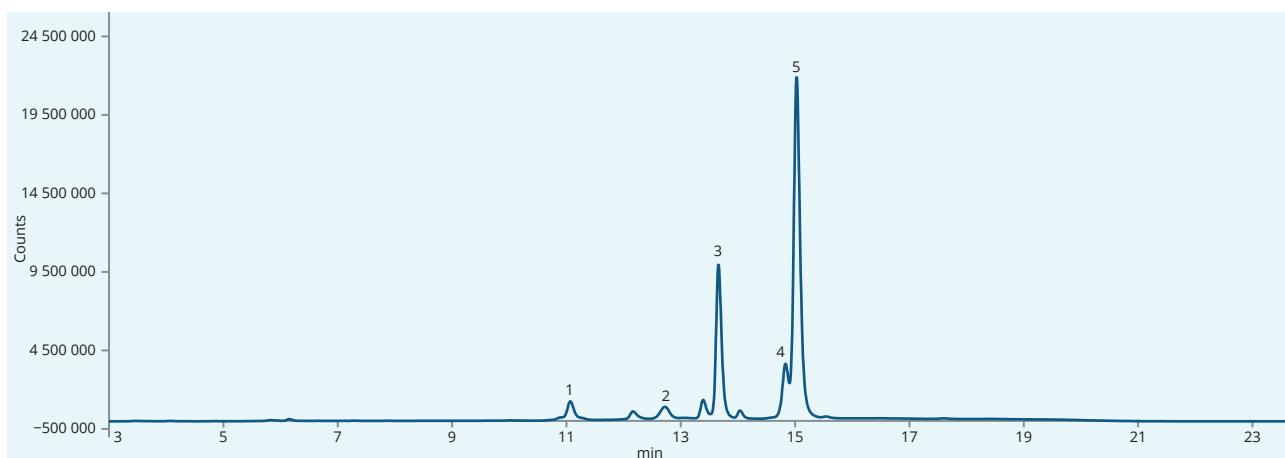


Lactoferrin analysis in bovine milk

Column	Arion® C4-BIO, 5 µm				
Dimensions	250 mm × 4.6 mm				
Part number	ARI-5846-LM46				
Mobile phase	A: 100% acetonitrile (ACN) B: 95 % ACN + 5 % H2O+ 0.1 % TFA C: 5 % ACN + 95 % H2O + 0.1 % TFA				
Gradient elution	Retention (min)	Flow (ml/min)	%A	%B	%C
	0.0	0.5	0.0	20.0	80.0
	0.5	0.5	0.0	30.0	70.0
	6.0	0.5	0.0	35.0	65.0
	10.0	0.5	5.0	40.0	55.0
	15.0	0.5	0.0	50.0	50.0
	16.0	0.5	0.0	20.0	80.0
	19.0	0.5	0.0	20.0	80.0
Temperature	60 °C				
Detection	FLD @280/340 nm*				
Injection volume	10 µl				
Analytes	1. Lysozyme 2. Lactoferrin 3. α-La (α-Lactalbumin) 4. β-LgB (β-Lactoglobulin B) 5. β-LgA (β-Lactoglobulin A)				

* Note: The detection can be at UV @205 nm.

Lactoferrin in goat's milk

Substance	Lactoferrin (LT)
Synonym	Lactotransferrin (LTF)

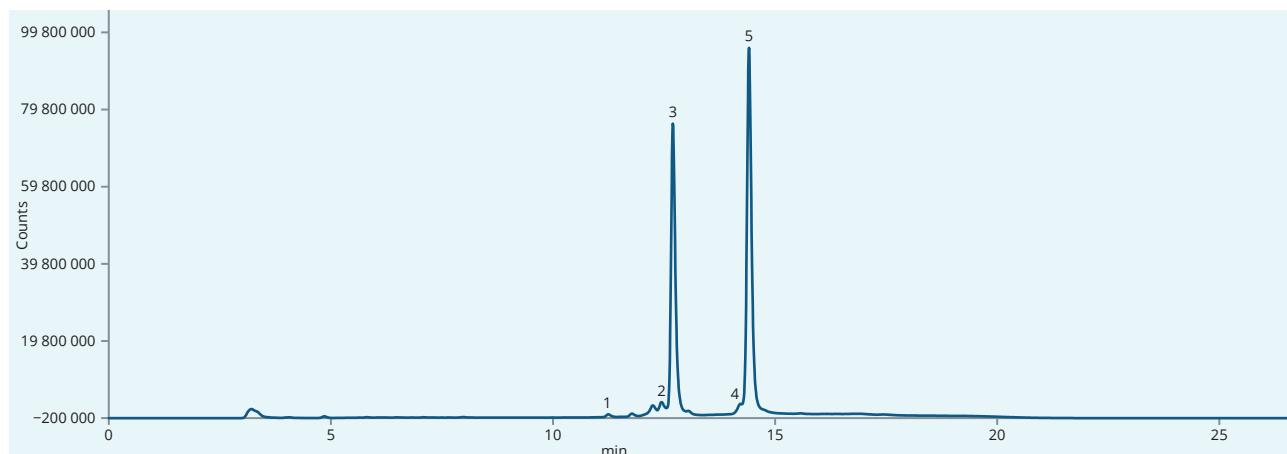

Lactoferrin analysis in goat's milk

Column	Arion® C4-BIO, 5 µm			
Dimensions	250 mm × 4.6 mm			
Part number	ARI-5846-LM46			
Mobile phase	A: 100% acetonitrile (ACN) B: 95 % ACN + 5 % H ₂ O + 0.1 % TFA C: 5 % ACN + 95 % H ₂ O + 0.1 % TFA			
Gradient elution	Retention (min)	Flow (ml/min)	%A	%B
	0.0	0.5	0.0	20.0
	0.5	0.5	0.0	30.0
	6.0	0.5	0.0	35.0
	10.0	0.5	5.0	40.0
	15.0	0.5	0.0	50.0
	16.0	0.5	0.0	20.0
	19.0	0.5	0.0	20.0
Temperature	60 °C			
Detection	FLD @280/340 nm*			
Injection volume	10 µl			
Analytics	1. Lysozyme 2. Lactorferrin 3. α-La (α-Lactalbumin) 4. β-LagB (β-Lactoglobulin, BLG) 5. β-LgA (β-Lactalbumin)			

*Note: The detection can be at UV @205 nm.



ARION®


Guard column system

The ARION® Guard System (AGS) is a universal guard system, which can be connected to almost any column hardware on the market. It is easy to use and it offers the shortest retention time shift of analytes in comparison with other major manufacturers. The AGS consists of a Guard holder and Guard cartridge, which is offered with various silica materials according to the stationary phase in the HPLC column used.


- Universal – fits virtually any column on the market.
- The **lowest influence on retention times** compared with other guard systems.
- Small size for easier installation in the column oven.
- **Any orientation** of the cartridge.
- Pressure rating up to **900 bar**.
- Higher cartridge capacity.




AGS system holder

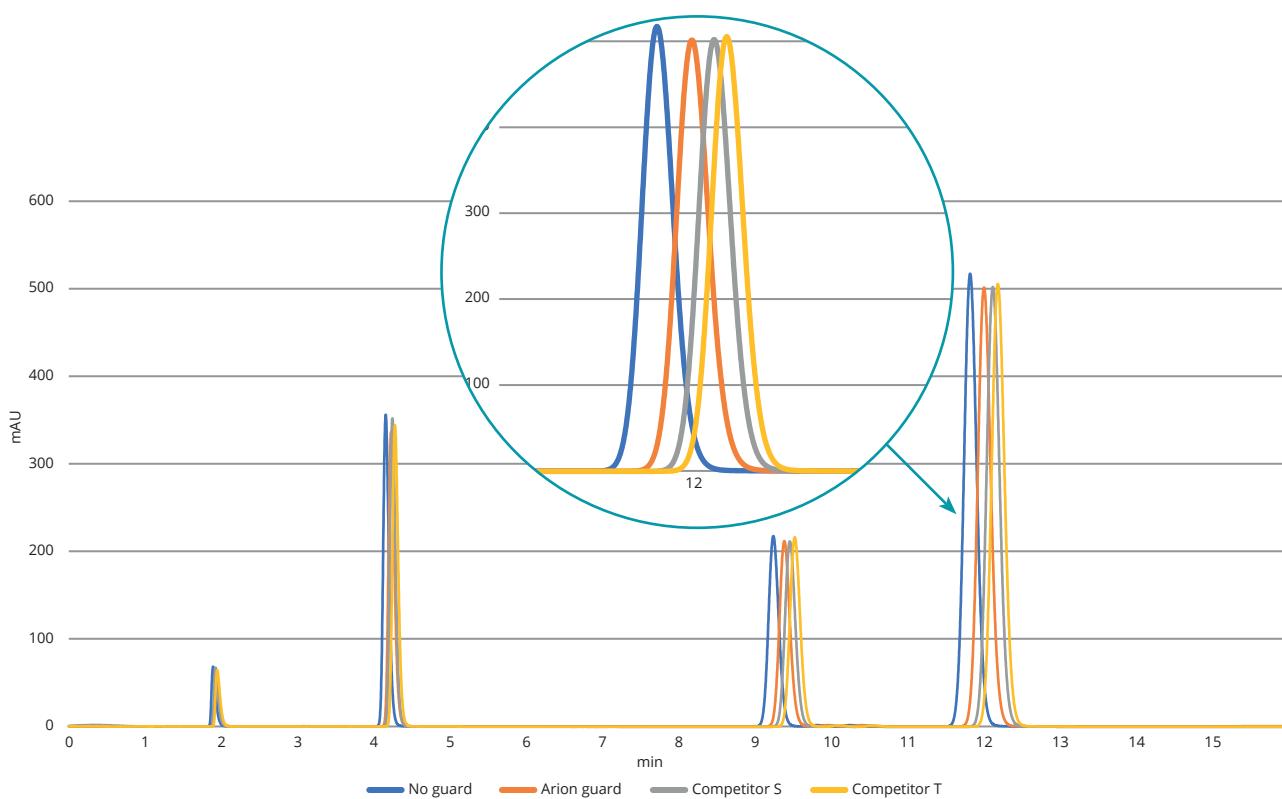

Guard column system

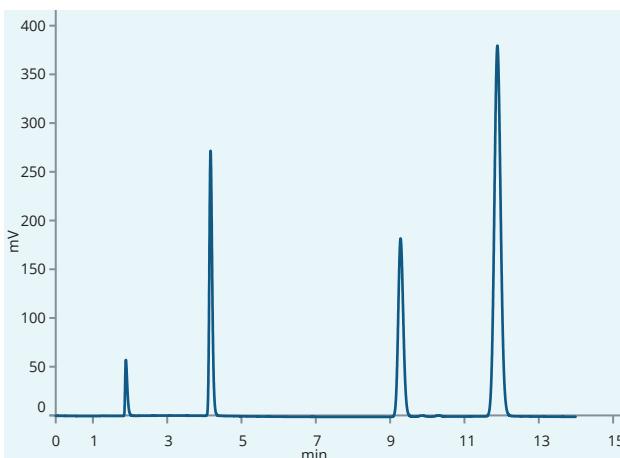

ARION® Plus with ARION® Guard System

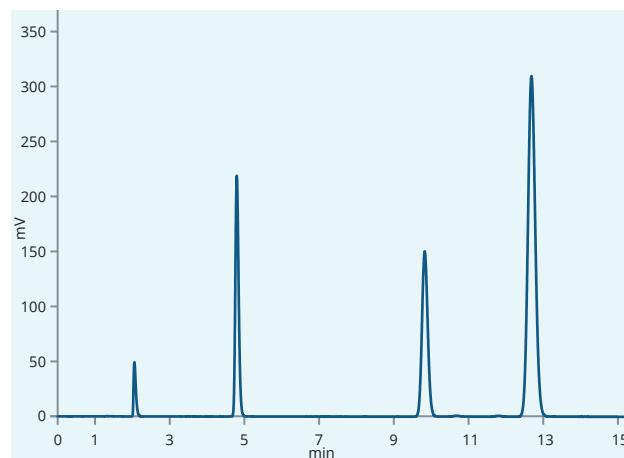

ARION® Polar with ARION® Guard System



Both chromatograms above show the separation of Uracil, Acetophenone, Toluene and Naphthalene with the ARION® Guard system in Acetonitrile/Water (65:35) at 254 nm. The ARION® Guard system does not affect column performance. It does not show any influence on peak symmetry or column resolution.

A higher sorbent bed (5×4 mm ID) offers a **raised capacity** without needing to couple two cartridges together. All this ensures lower running costs.



Guard System Selection Guide

Material	Pore size	pH Stability	Column ID 2.1–3.0 5.0 × 2.1 mm	Column ID 3.0–4.6 5.0 × 4.0 mm	100% aqueous mobile phase
RP 1.7 µm	100 Å	1 to 10	AGS-5731-RA2	–	✗
RP 2.2 µm	100 Å	1 to 10	AGS-5731-RB2	–	✓
RP 3.0 µm	100 Å	1 to 10	AGS-5731-RC2	AGS-5731-RC4	✓
RP 5.0 µm	100 Å	1 to 10	AGS-5731-RD2	AGS-5731-RD4	✓
HILIC 2.2 µm	100 Å	1.5 to 7	AGS-5731-HB2	–	OM/W*
HILIC 3.0 µm	100 Å	1.5 to 7	AGS-5731-HC2	AGS-5731-HC4	OM/W*
HILIC 5.0 µm	100 Å	1.5 to 7	AGS-5731-HD2	AGS-5731-HD4	OM/W*
NP 2.2 µm	100 Å	n/a	AGS-5731-NB2	–	n/a
NP 3.0 µm	100 Å	n/a	AGS-5731-NC2	AGS-5731-NC4	n/a
NP 5.0 µm	100 Å	n/a	AGS-5731-ND2	AGS-5731-ND4	n/a
BIO RP 3.0 µm	300 Å	1.5 to 7	AGS-5731-BC2	AGS-5731-BC4	✗
BIO RP 5.0 µm	300 Å	1.5 to 7	AGS-5731-BD2	AGS-5731-BD4	✗

* OM/W – Organic modifier (water-miscible)/water mobile phase recommended.

Ferrules for ARION® Guard System

Material	Pressure	10 pcs
PEEK	<400 bar*	AGS-5731-Y00
Stainless Steel, Type 316	<689 bar	AGS-5731-Z00

* Maximum pressure of PEEK ferrules depends on the tubing used. Max. pressure of 400 bar is for 1/16: OD tubing with ID 0.05 to 0.18 mm. ARION® Guard System includes one Stainless Steel ferrule in standard package.



AGS holder with PEEK ferrule
p/n AGS-5731-00P



AGS holder with Stainless Steel ferrule
p/n AGS-5731-000

Guard system for preparative columns

Preparative guard column system (PGS) is intended to use with 21.2 mm ID preparative HPLC columns.

Preparative Guard System cartridges

Material	Pore size	pH Stability	Column ID	p/n	100% aqueous mobile phase
C18 5.0 µm	100 Å	1 to 10	21.2	PGS-5856-UD9*	x
C8 5.0 µm	120 Å	2 to 7	21.2	PGS-5856-TD9*	x
Si 5.0 µm	100 Å	1.5 to 7	21.2	PGS-5856-VD9*	x

Note: Other phases on request.

* Requires holder PGS-5856-000



PGS holder
p/n PGS-5856-000




Preparative guard system cartridge



ASTRA® HPLC columns extend our ARION® and CHROMSHELL® product lines. The ASTRA® has been developed in the Czech Republic to offer an alternate to a broad range of general HPLC columns. ASTRA® brings completely new and unique stationary phase with the polar embedded group to offer a complementary selectivity.


- Unique and high endcapped C18 phases.
- 330 m²/g surface area.

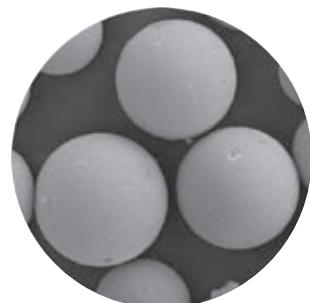

ASTRA® Silicagel

	5 µm	3 µm	2 µm
Metal content	<10 ppm	<10 ppm	<10 ppm
Mean particle diameter	4.6 ± 1.2 µm	3.0 ± 0.7 µm	2.1 ± 0.4 µm
Proximity to the shape of sphere	0.97 ± 0.04	0.97 ± 0.03	0.97 ± 0.03


ASTRA® phases	Particle size (µm)	Pore size (Å)	Surface area (m ² /g)	Carbon load	pH stability	Endcapping	100% aqueous mobile phase	USP code
C18-HE	2, 3, 5	100	330	17 %	2 to 9	High	✗	L1
C18-AQ	2, 3, 5	100	330	13 %	2 to 9	Mixed	✓	L1
DM	3, 5	100	205	12 %	2 to 9	High	✗	-
Diol	3, 5	100	330	5 %	2 to 7.5	-	✓	L20

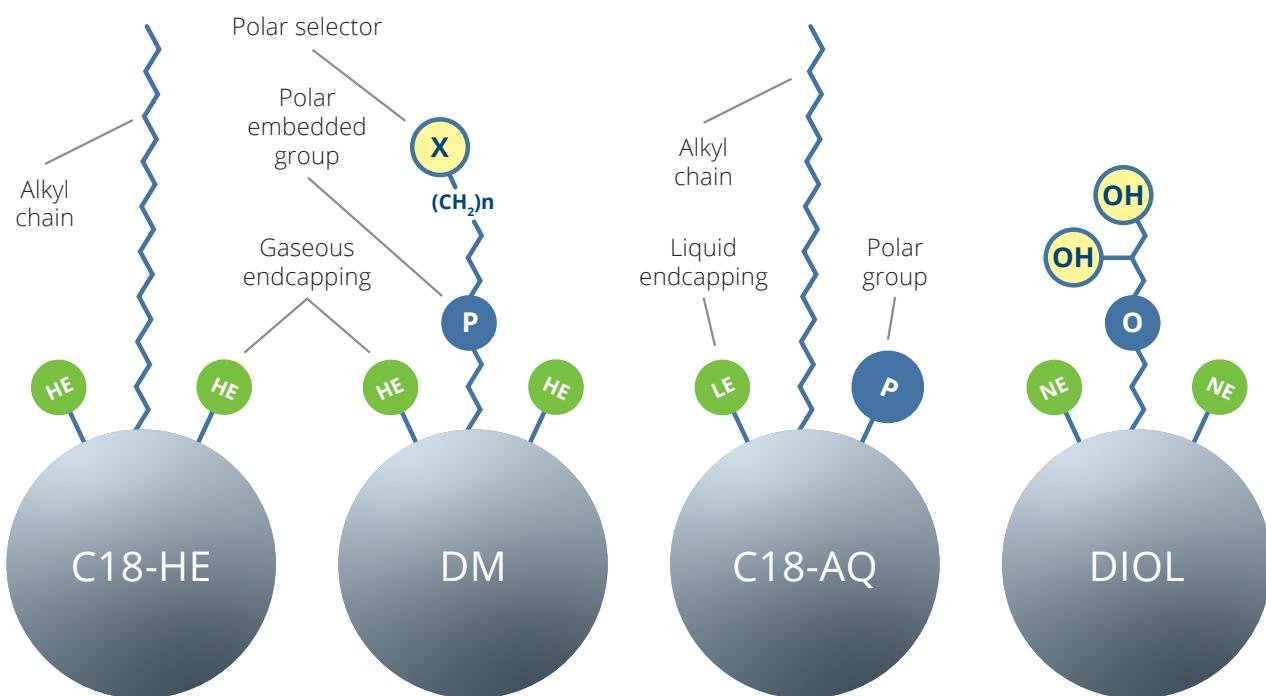




Up close


As with all phases developed by Chromservis, ASTRA® HPLC column particles are continuously analysed by SEM. The electron microscope shows the very high quality of ASTRA® 3 and 5µm particles.

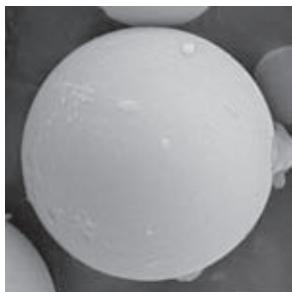


ASTRA® particle 5 µm

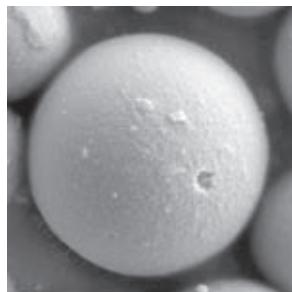

ASTRA® particle 3 µm

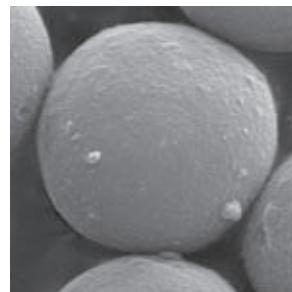

ASTRA® particle 2 µm

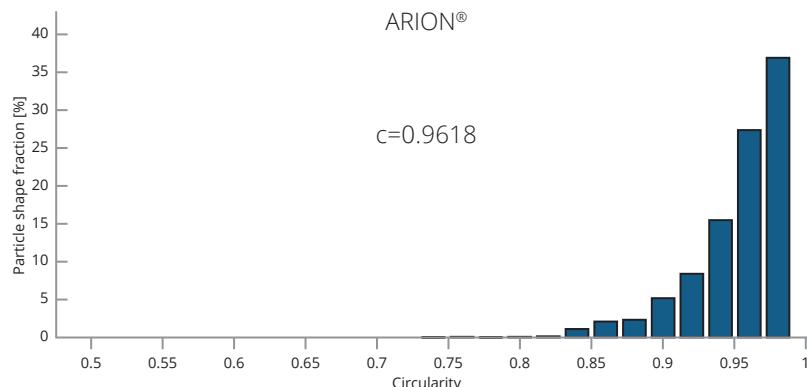

Main particle characteristics:

- Close proximity to a sphere.
- Highly effective endcapping.
- No broken particles.
- Robustness to high pressures.
- Lot-to-lot reproducibility.
- Unique modern embedded phases.

ASTRA® column hardware


- Electropolished with very low Ra reduces wall effect
- Rated up to 20000 psi (1300 bar), ideal for the UHPLC applications



ASTRA® ASTRA® PHARMA APPLICATIONS


Beta Blockers

Beta Blockers are also known as beta-adrenergic blocking agents. They are used as a medication that reduces blood pressure.

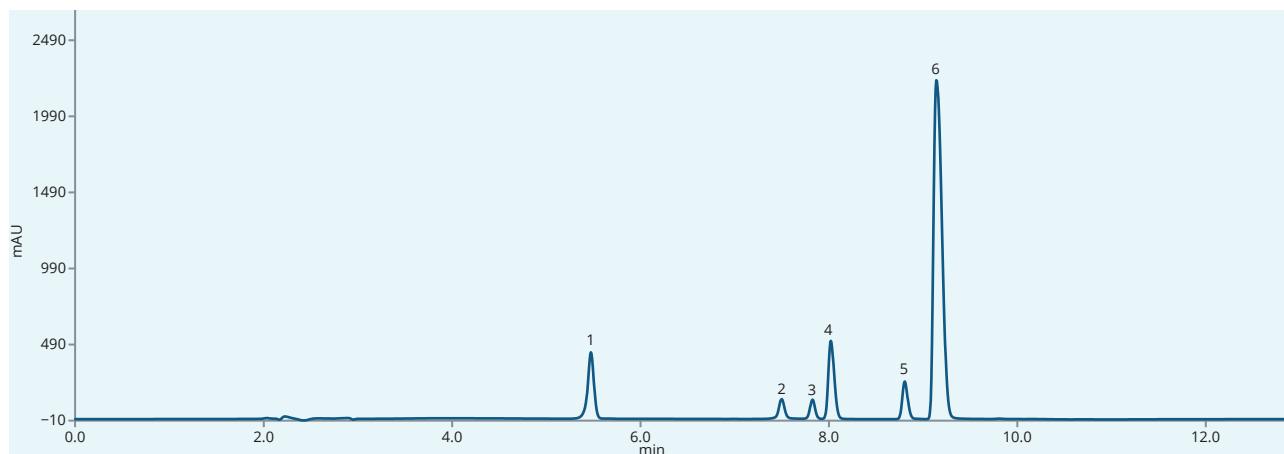


Standard mixture on ASTRA® C18-HE column


Columns	ASTRA® C18-HE, 5 µm			
Dimensions	150 mm × 4.6 mm			
Part numbers	AST-5732-LK46			
Mobile phase	A: Phosphate buffer 20mM, pH 2.5 B: ACN			
Gradient elution	Time	A (%)	B (%)	Flow rate (ml/l)
	0	95	5	0.75
	3	85	15	1.00
	8	50	50	1.00
	12	95	5	1.00
	13	95	5	0.75
Flow rate	See gradient table (ml/l)			
Temperature	25 °C			
Detection	UV @250 nm			
Analytics	1. Atenolol, CAS No. 29122-68-7 2. Pindolol, CAS No. 13523-86-9 3. Acebutolol, CAS No. 37517-30-9 4. Metoprolol, CAS No. 37350-58-6 5. Labetalol, CAS No. 36894-69-6 6. Propranolol, CAS No. 525-66-6			

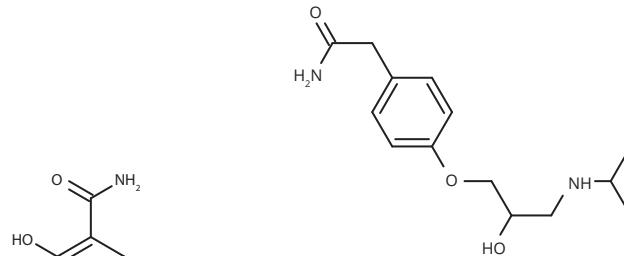


Atenolol

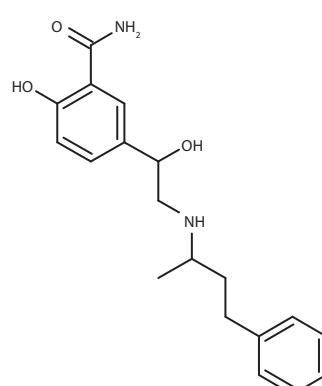


Labetalol

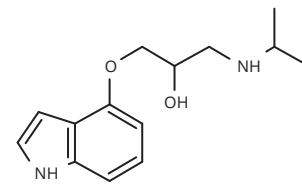


Pindolol

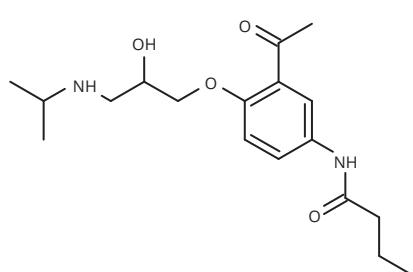

Acebutolol

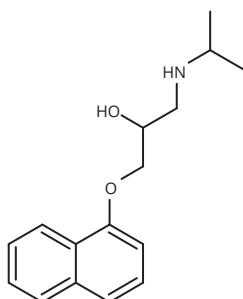

Propranolol

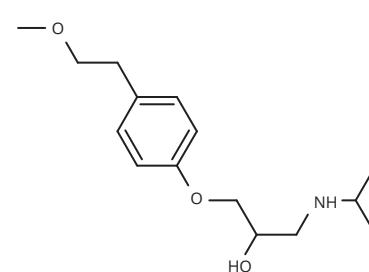


Metoprolol


ASTRA® ASTRA® CLINICAL APPLICATIONS

API glucuronide by LC/MS


This application shows high ASTRA® HPLC column stability in the pharmacokinetic assay. API is used in hypolipidemic therapy adjusting cholesterol levels in the human body.

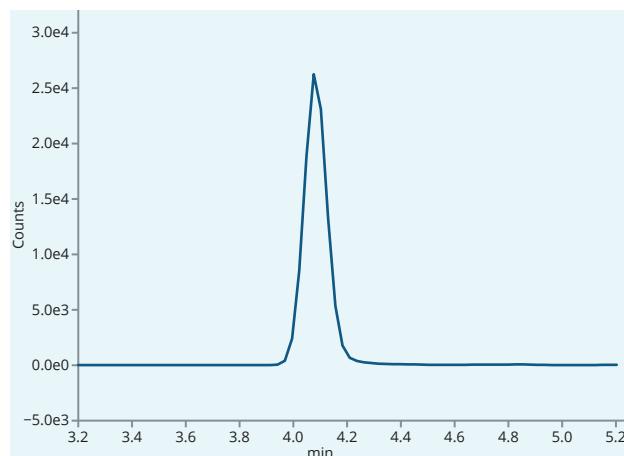

Scan 1 – API glucuronide

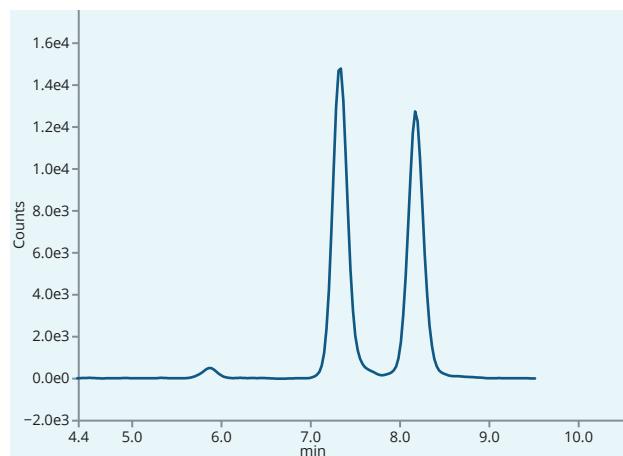

Scan 2 – API isomers

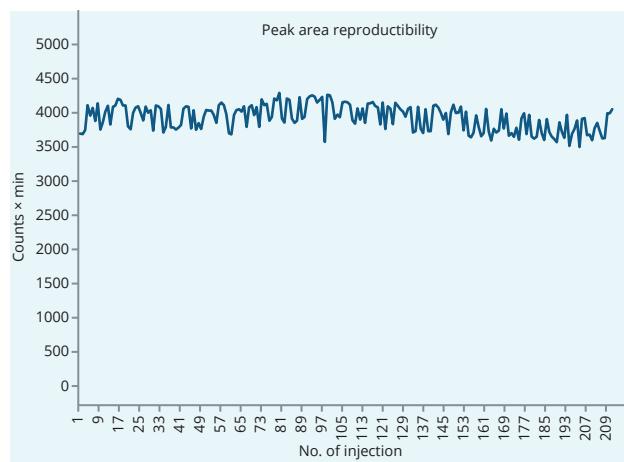

Plasma sample on ASTRA® C18-HE column

Column	ASTRA® C18-HE, 5 µm
Dimensions	150 mm × 4.6 mm
Part number	AST-5732-LK46
Mobile phase	MeOH : ACN : Water : 0.1% NH ₄ OH 25/50/20/5 (v/v/V/V) Isocratic elution
Flow rate	0.45 ml/min
Temperature	Ambient
Injection volume	15 µl
Detection	MS/MS
Mode	ESI, Negative 2500 eV
MS Temperature	350 °C (capillary), 380 °C (vaporizer)
Collision gas	Argon
Instrument	TSQ Quantiva (Thermo Fisher Scientific)
Analytes	1. API (proprietary)


Compound name	Q1 (m/z)	Q2 (m/z)	Collision cell pressure	Collision energy
API Glucuronide D4	588	275	2 mTorr	29 eV
API D	412	275	2 mTorr	29 eV

Clonazepam


Xanax is an benzodiazepine alprazolam-based anxiolytic. Counterfeit Xanax may contain caffeine as a main component, as well as clonazepam and flualprazolam, both of which have a strong sedative effect, are able to cause amnesia, and belong to the group of new psychoactive drugs.

Substance


Alprazolam, CAS Number 28981-97-7
 Caffeine, CAS Number 58-08-2
 Clonazepam, CAS Number 33887-02-4
 Flualprazolam, CAS Number 28910-91-0




Alprazolam




Caffeine

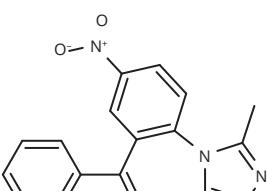


Clonazepam

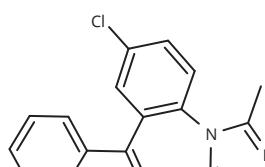

Flualprazolam

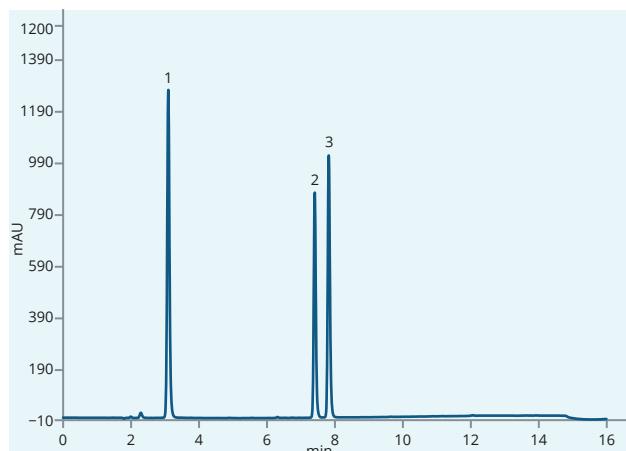

Sample on ASTRA® C18-HE HPLC column

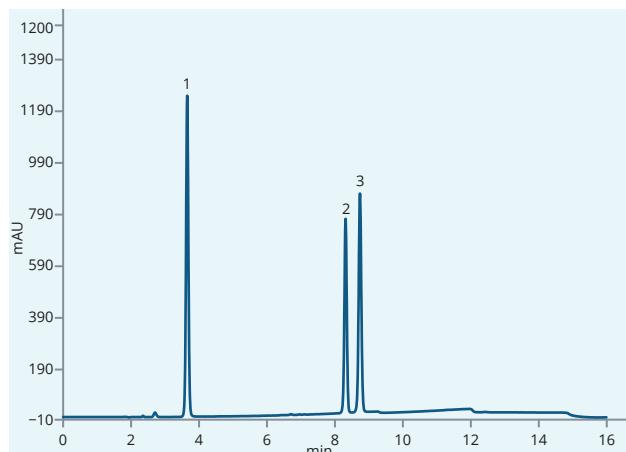

Sample on ASTRA® DM HPLC column

Column ASTRA® C18-HE, 5 µm /
 ASTRA® DM, 5 µm

Dimensions 150 mm × 4.6 mm (for both columns)

Part number AST-5732-LK46 / AST-5810-LK46

Mobile phase A: H₂O / 0.1% HCOOH + 2 mM HCOONH₄
 B: CH₃CN / 0.1% HCOOH

Gradient elution	Time	A (%)	B (%)	Flow rate (ml/min)
	0	80	20	1.0
	2	80	20	1.0
	8	20	80	1.0
	11.5	20	80	1.0
	12	80	20	1.0
	15	80	20	1.0

Flow rate 1 ml/min

Temperature 20 °C

Injection volume 10 µl

Detection UV @254 nm

Analyses
 1. Caffeine
 2. Clonazepam
 3. Flualprazolam




UNIVERSITY OF
 CHEMISTRY AND TECHNOLOGY
 PRAGUE

Developed in co-operation with Technical university in Prauge.


ASTRA® ASTRA® PHARMA APPLICATIONS

HMF in Infusion Solution

The levels of the degradation product, 5-hydroxymethylfurfural (5-HMF), in Dextrose Injection is an important determination in pharmaceutical formulas and pharmacokinetic studies. ASTRA® DM shows better retention for polar compounds.

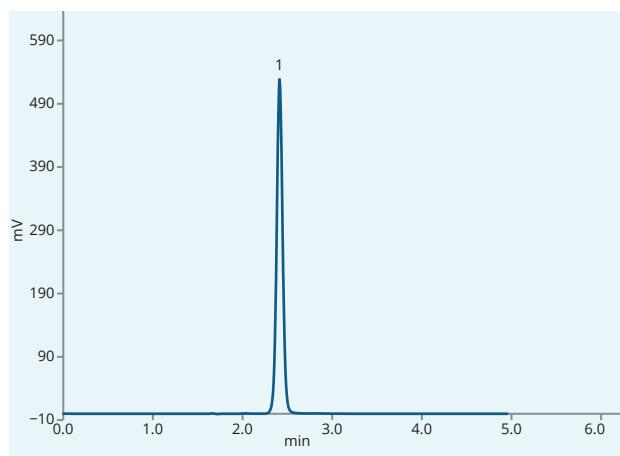


Standard mixture on ASTRA® C18-HE column

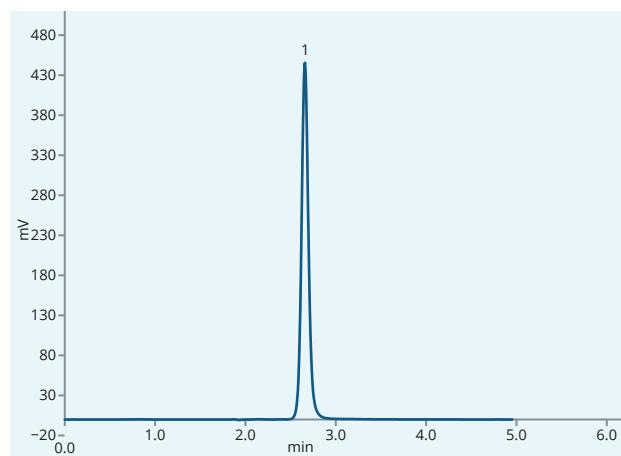

Standard mixture on ASTRA® DM column

Column	ASTRA® C18-HE, 5 µm / ASTRA® DM, 5 µm
Dimensions	150 mm × 4.6 mm / 150 mm × 4.6 mm
Part number	AST-5732-LK46 / AST-5810-LK46
Mobile phase	Methanol : water 40/60 (v/v) Isocratic elution
Flow rate	1.0 ml/min
Temperature	25 °C
Injection volume	2.5 µl
Detection	UV @284 nm
Analytics	1. 5-Hydroxymethylfurfural




5-Hydroxymethylfurfural

ASTRA® ASTRA® FOOD APPLICATIONS

Stevia glycosides

Stevia rebaudiana Bertoni is a plant used for its sweet taste. It includes glycosides, which are used as sweeteners in the food industry.

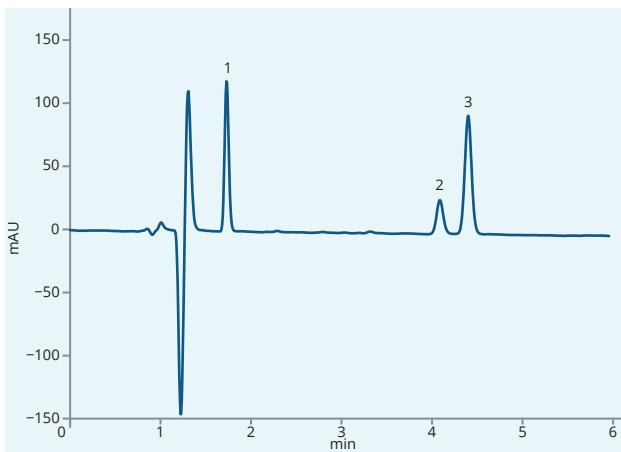


Standard on ASTRA® C18-HE

Column	ASTRA® C18-HE, 5 µm
Dimensions	150 mm × 4.6 mm
Part number	AST-5732-LK46
Mobile phase	Acetonitrile + 0.1% formic acid : water (32 : 68 v/v) Isocratic elution
Flow rate	1.6 ml/min
Temperature	65 °C
Detection	UV @210 nm
Analytes	1. Rebaudioside D 2. Rebaudioside A 3. Stevioside

Triazoles

Triazoles are used as intermediates for API production. This application shows the separation of all triazoles in one analysis.

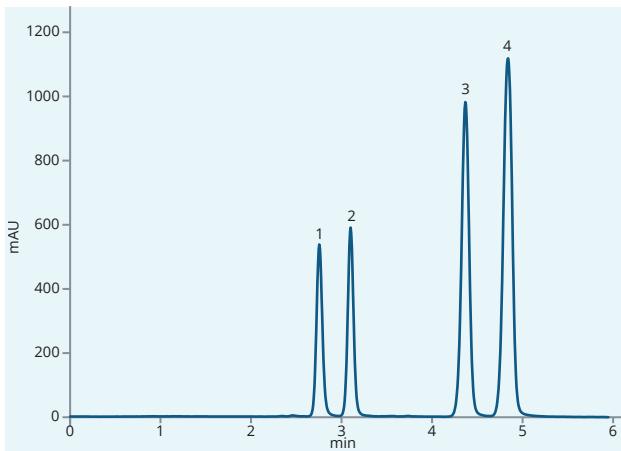

Standard on ASTRA® DM

Column	ASTRA® DM, 3 µm
Dimensions	150 mm × 4.6 mm
Part number	AST-5810-IK46
Mobile phase	2mM Ammonium formate + 0.1% Formic acid, pH 2.83 : MeOH (90:10)
Flow rate	1.0 ml/min
Temperature	25 °C
Injection volume	1 µl
Detection	DAD @210 nm
Analytes	1. TCA, CAS 4928-87-4 2. TAM, CAS 3641-08-5 3. TME, CAS 4928-88-5 4. TCN, CAS 3641-10-9

Ordering information

Analytical columns

2 µm ASTRA® all dimensions in mm						AGS Guard System
Phase	30 × 2.1	50 × 2.1	75 × 2.1	100 × 2.1	150 × 2.1	2.1 mm Cartridges
C18-HE	Coming soon	AST-5732-TG21	AST-5732-TH21	AST-5732-TI21	AST-5732-TK21	AGS-5731-RB2*
C18-AQ	Coming soon	AST-5832-TG21	AST-5832-TH21	AST-5832-TI21	AST-5832-TK21	AGS-5731-RB2*

3 µm ASTRA® all dimensions in mm				AGS Guard System
Phase	50 × 2.1	100 × 2.1	150 × 2.1	2.1 mm Cartridges
C18-HE	AST-5732-IG21	AST-5732-II21	AST-5732-IK21	AGS-5731-RC2*
C18-AQ	AST-5832-IG21	AST-5832-II21	AST-5832-IK21	AGS-5731-RC2*
DM	AST-5810-IG21	AST-5810-II21	AST-5810-IK21	-

3 µm ASTRA® all dimensions in mm						AGS Guard System
Phase	100 × 3.0	150 × 3.0	100 × 4.6	150 × 4.6	250 × 4.6	4.0 mm Cartridges
C18-HE	AST-5732-II30	AST-5732-IK30	AST-5732-II46	AST-5732-IK46	On request	AGS-5731-RC4*
C18-AQ	AST-5832-II30	AST-5832-IK30	AST-5832-II46	AST-5832-IK46	On request	AGS-5731-RC4*
DM	AST-5810-II30	AST-5810-IK30	AST-5810-II46	AST-5810-IK46	-	AGS-5731-RC4*
Diol	Coming soon	Coming soon	Coming soon	Coming soon	-	-

5 µm ASTRA® all dimensions in mm					AGS Guard System
Phase	50 × 2.1	100 × 3.0	150 × 3.0	4.0 mm Cartridges	
C18-HE	AST-5732-LG21	AST-5732-LI30	AST-5732-LK30	AGS-5731-RD4*	
C18-AQ	AST-5832-LG21	AST-5832-LI30	AST-5832-LK30	AGS-5731-RD4*	
DM	-	AST-5810-LI30	AST-5810-LK30	AGS-5790-RD4*	
Diol	-	AST-5858-LI30	AST-5858-LK30	-	

5 µm ASTRA® all dimensions in mm					AGS Guard System
Phase	100 × 4.6	150 × 4.6	250 × 4.6	4.0 mm Cartridges	
C18-HE	AST-5732-LI46	AST-5732-LK46	AST-5732-LM46	AGS-5731-RD4*	
C18-AQ	AST-5832-LI46	AST-5832-LK46	AST-5832-LM46	AGS-5731-RD4*	
DM	AST-5810-LI46	AST-5810-LK46	AST-5810-LM46	AGS-5731-RD4*	
Diol	AST-5858-LI46	AST-5858-LK46	AST-5858-LM46	-	

* AGS Guard System cartridges require AGS Holder (p/n AGS-5731-000). The holder is supplied with a stainless steel ferrule.
For applications up to 400 bar, the PEEK ferrule is recommended for use (p/n AGS-5731-Y00).



AGS-5790-RD4

CHROMSHELL®




CHROMSHELL® extends the ARION® phases in the area of core-shell technology (SPP, Superficially-Porous Particles). These columns use an ultra high purity silica of 2.6 and 1.7 µm particles.

- Ultrapure silica with low metal content.
- Various chemistries including Biphenyl, PFP and HILIC for a broad range of applications.
- Temperature stability up to 90 °C.

Metal content	<10 ppm
Temperature stability	100 °C
Mean Particle diameter	2.54 ± 0.18 µm
Proximity to the shape of a sphere	0.95 ± 0.04

CHROMSHELL® phases	Particle size (µm)	Pore size (Å)	Surface area (m²/g)	Carbon load	pH stability	100% aqueous mobile phase	Endcapping	USP code
C18 Plus	2.6	85	130	9 %	1.5 to 7.5	✗	Single-step	L1
C18-XB	2.6	85	130	8 %	1.5 to 8.0	✗	Single-step	L1
C18 Plus AD	1.7	100	90	9 %	2.0 to 10.0	✗	Proprietary	L1
	2.6	100	130	7 %	2.0 to 10.0	✗	Proprietary	L1
C18 Polar	2.6	85	130	6.5 %	1.5 to 7.0	✓	Mixed	L1
C8	1.7	100	90	5 %	2.0 to 10.0	✗	Proprietary	L7
	2.6	100	130	7 %	2.0 to 10.0	✗	Proprietary	L7
C4	1.7	100	90	4 %	2.0 to 10.0	✗	Proprietary	L26
	2.6	100	130	5 %	2.0 to 10.0	✗	Proprietary	L26
Biphenyl	1.7	100	90	5 %	2.0 to 10.0	✗	Proprietary	L11
	2.6	100	130	6 %	2.0 to 10.0	✗	Proprietary	L11
Phenyl-Hexyl	1.7	100	90	5 %	2.0 to 10.0	✗	Proprietary	L11
	2.6	100	130	6 %	2.0 to 10.0	✗	Proprietary	L11
PFP	1.7	100	90	5 %	2.0 to 10.0	✗	Proprietary	L43
	2.6	100	130	4 %	2.0 to 10.0	✗	Proprietary	L43
HILIC Plus	2.6	85	130	-	1.5 to 7.0	-	Proprietary	L3
Cyano	1.7	100	90	4 %	2.0 to 10.0	✗	Proprietary	L10
	2.6	100	130	3 %	2.0 to 10.0	✗	Proprietary	L10

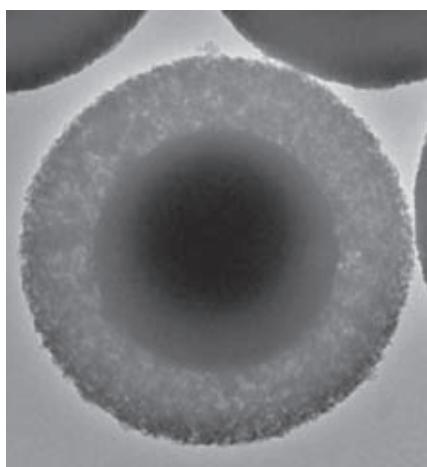

Chromshell® TEM Image

CHROMSHELL®

Complementary selectivities



A C18 phase with a balanced retention profile with the highest hydrophobicity

pH Range	1.5 to 7.5
USP Code	L1



A hydrophobic C18 phase with a specific surface treatment for high temperature applications

pH Range	1.5 to 8.0
USP Code	L1




A hydrophobic C18 phase with an extended pore size and pH stability

pH Range	2.0 to 10.0
USP Code	L1




A polar end-capped developed for mid-polar and polar retention together with stability in the 100% aqueous mobile phase

pH Range	1.5 to 7.0
USP Code	L1

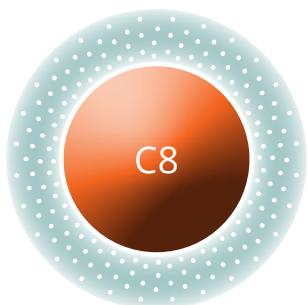


A moderate hydrophobic phase with extended pH stability

pH Range	2.0 to 10.0
USP Code	L7

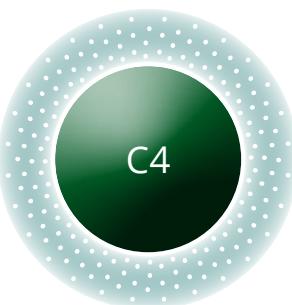

A weak hydrophobic stationary phase bringing performance to USP L26

pH Range	2.0 to 10.0
USP Code	L26

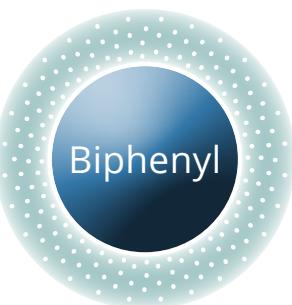

A reversed phase with aromatic and unsaturated selectivity, ideal for isomer separations

pH Range	2.0 to 10.0
USP Code	L11



A moderate hydrophobic phase with aromatic selectivity

pH Range	2.0 to 10.0
USP Code	L11



A PFP phase for both, reversed phase and HILIC separations, increased retention for halogenated compounds

pH Range	2.0 to 10.0
USP Code	L43



A HILIC stationary phase with the highest polar selectivity

pH Range	2.0 to 10.0
USP Code	L3




A very polar selectivity bringing performance to USP L10


pH Range	2.0 to 10.0
USP Code	L10

Up close


The 2.6-micron electron microscope field clearly shows the superlative quality of CHROMSHELL® particles.

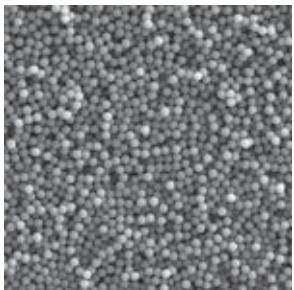


CHROMSHELL®
(100 × 100 µm)

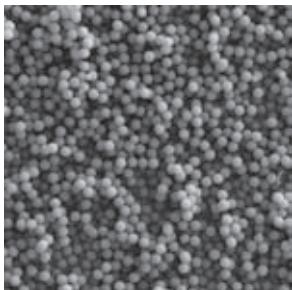

Competitor K
(100 × 100 µm)

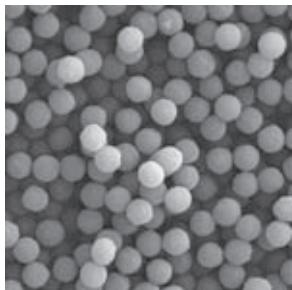

CHROMSHELL®
(30 × 30 µm)

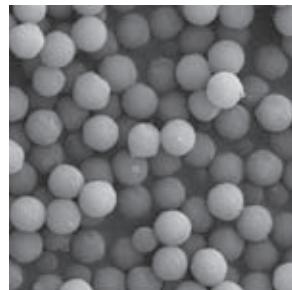


Competitor K
(30 × 30 µm)

The main particle characteristics:

- High proximity to a sphere.
- Tight particle size distribution.
- No broken particles.
- No presence of clustered particles.
- Particle uniformity/homogeneity.



Particle size distribution

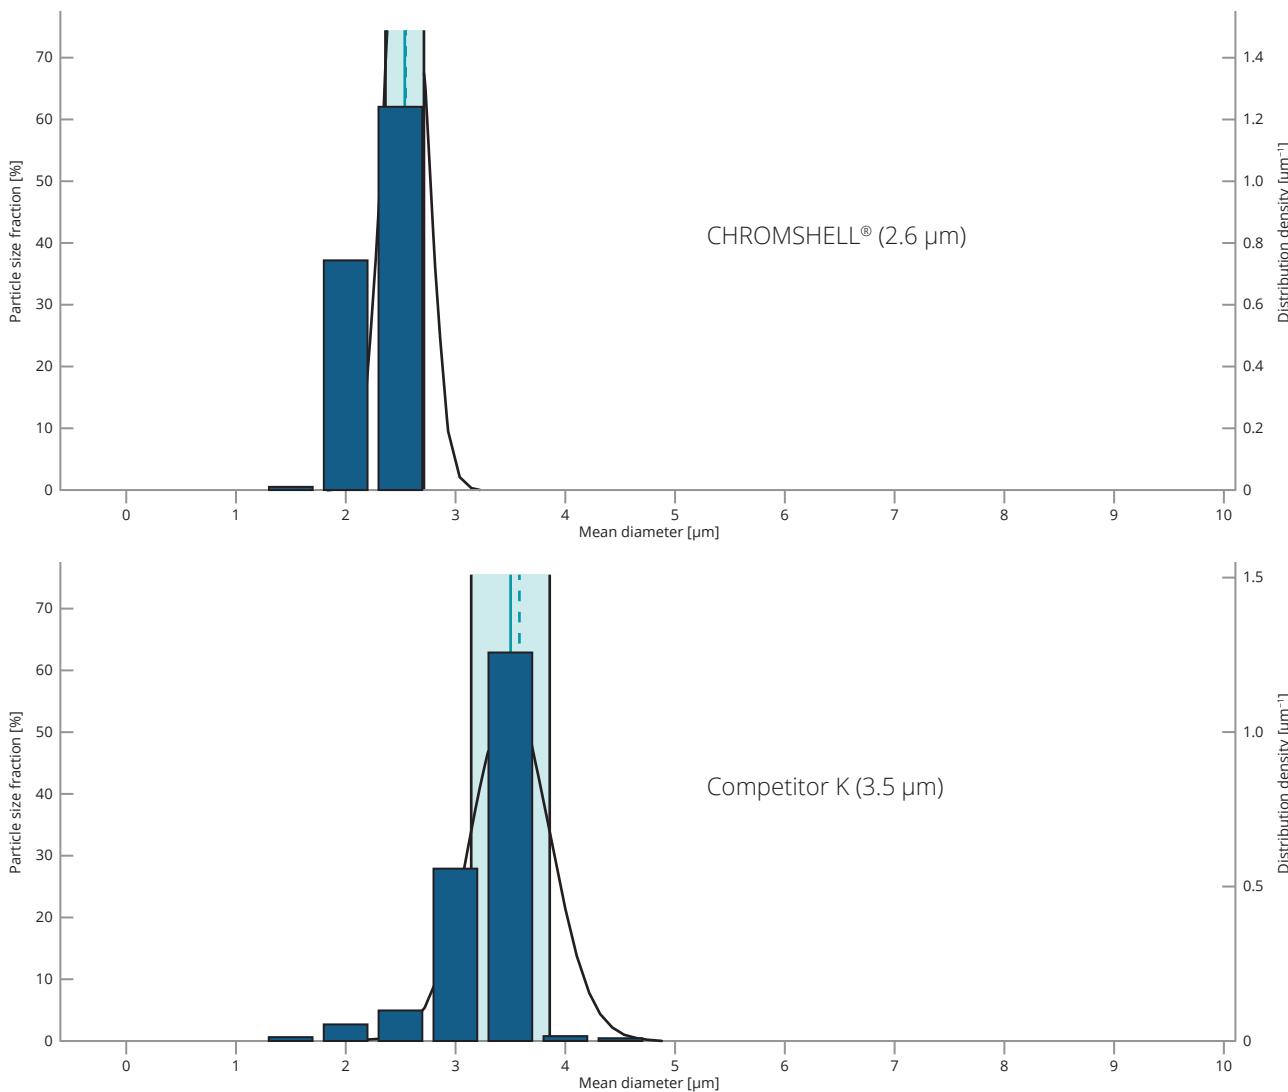



CHROMSHELL®

Circularity & surface smoothness

The core-shell particles were subjected to SEM analysis to determine circularity and surface smoothness.

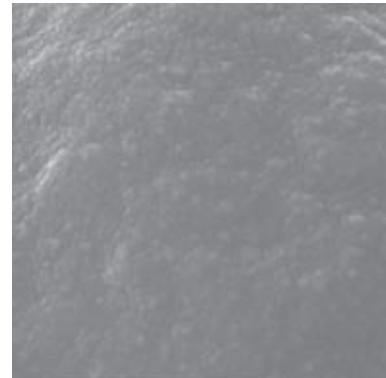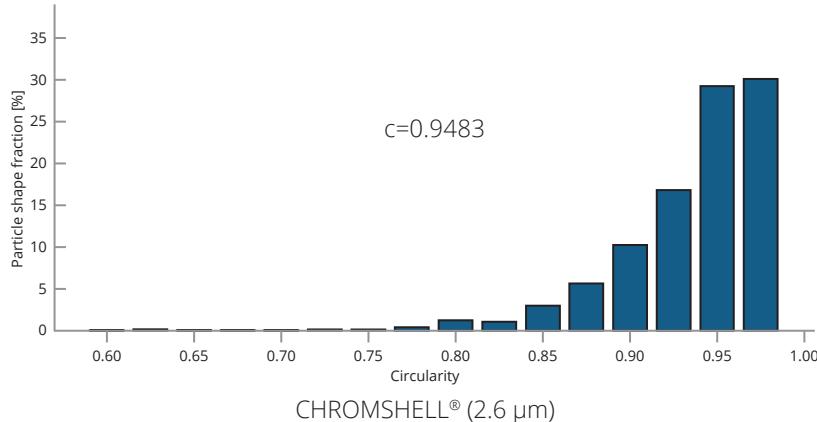

Detail view on pores

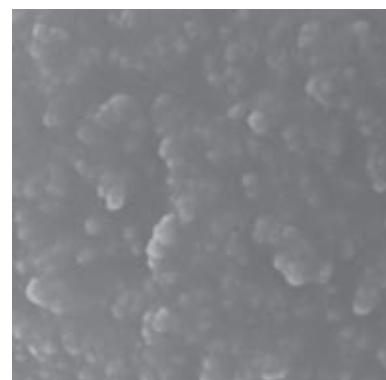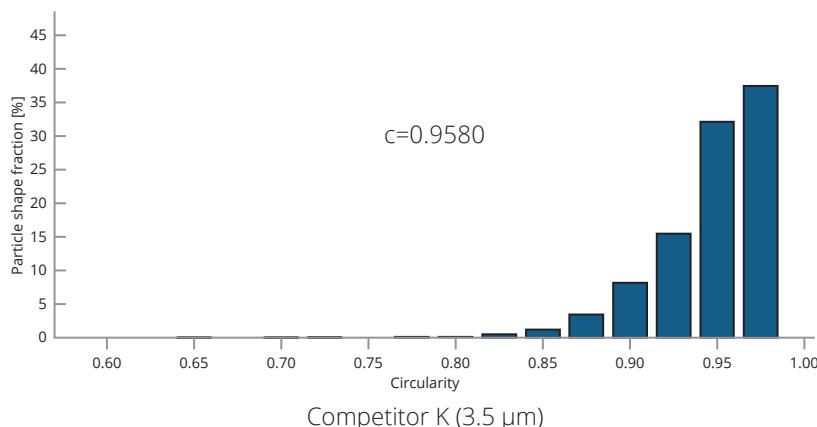

Detail view on pores up close

Ordering information

1.7 µm CHROMSHELL®

all dimensions in mm

Phase	50 × 2.1	100 × 2.1	150 × 2.1
C18 Plus AD	CSH-5862-BG21	CSH-5862-BI21	CSH-5862-BK21
C8	CSH-5863-BG21	CSH-5863-BI21	CSH-5863-BK21
C4	CSH-5864-BG21	CSH-5864-BI21	CSH-5864-BK21
Biphenyl	CSH-5851-BG21	CSH-5851-BI21	CSH-5851-BK21
Phenyl-Hexyl	CSH-5865-BG21	CSH-5865-BI21	CSH-5865-BK21
PFP	CSH-5866-BG21	CSH-5866-BI21	CSH-5866-BK21
Cyano	CSH-5867-BG21	CSH-5867-BI21	CSH-5867-BK21

1.7 µm CHROMSHELL®

all dimensions in mm

Phase	50 × 3.0	100 × 3.0	150 × 3.0	250 × 3.0
C18 Plus AD	CSH-5862-BG30	CSH-5862-BI30	CSH-5862-BK30	CSH-5862-BM30
C8	CSH-5863-BG30	CSH-5863-BI30	CSH-5863-BK30	CSH-5863-BM30
C4	CSH-5864-BG30	CSH-5864-BI30	CSH-5864-BK30	CSH-5864-BM30
Biphenyl	CSH-5851-BG30	CSH-5851-BI30	CSH-5851-BK30	CSH-5851-BM30
Phenyl-Hexyl	CSH-5865-BG30	CSH-5865-BI30	CSH-5865-BK30	CSH-5865-BM30
PFP	CSH-5866-BG30	CSH-5866-BI30	CSH-5866-BK30	CSH-5866-BM30
Cyano	CSH-5867-BG30	CSH-5867-BI30	CSH-5867-BK30	CSH-5867-BM30

1.7 µm CHROMSHELL®

all dimensions in mm

Phase	50 × 4.6	100 × 4.6	150 × 4.6	250 × 4.6
C18 Plus AD	CSH-5862-BG46	CSH-5862-BI46	CSH-5862-BK46	CSH-5862-BM46
C8	CSH-5863-BG46	CSH-5863-BI46	CSH-5863-BK46	CSH-5863-BM46
C4	CSH-5864-BG46	CSH-5864-BI46	CSH-5864-BK46	CSH-5864-BM46
Biphenyl	CSH-5851-BG46	CSH-5851-BI46	CSH-5851-BK46	CSH-5851-BM46
Phenyl-Hexyl	CSH-5865-BG46	CSH-5865-BI46	CSH-5865-BK46	CSH-5865-BM46
PFP	CSH-5866-BG46	CSH-5866-BI46	CSH-5866-BK46	CSH-5866-BM46
Cyano	CSH-5867-BG46	CSH-5867-BI46	CSH-5867-BK46	CSH-5867-BM46

CHROMSHELL®

Ordering information

2.6 µm CHROMSHELL®

all dimensions in mm

Phase	30 × 2.1	50 × 2.1	75 × 2.1	100 × 2.1	150 × 2.1
C18 Plus	CSH-5722-GD21	CSH-5722-GG21	CSH-5722-GH21	CSH-5722-GI21	CSH-5722-GK21
C18-XB	CSH-5749-GD21	CSH-5749-GG21	CSH-5749-GH21	CSH-5749-GI21	CSH-5749-GK21
C18 Plus AD	-	CSH-5862-GG21	-	CSH-5862-GI21	CSH-5862-GK21
C18 Polar	CSH-5751-GD21	CSH-5751-GG21	CSH-5751-GH21	CSH-5751-GI21	CSH-5751-GK21
C8	-	CSH-5863-GG21	-	CSH-5863-GI21	CSH-5863-GK21
C4	-	CSH-5864-GG21	-	CSH-5864-GI21	CSH-5864-GK21
Biphenyl	-	CSH-5851-GG21	-	CSH-5851-GI21	CSH-5851-GK21
Phenyl-Hexyl	-	CSH-5865-GG21	-	CSH-5865-GI21	CSH-5865-GK21
PFP	-	CSH-5866-GG21	-	CSH-5866-GI21	CSH-5866-GK21
HILIC Plus	CSH-5752-GD21	CSH-5752-GG21	CSH-5752-GH21	CSH-5752-GI21	CSH-5752-GK21
Cyano	-	CSH-5867-GG21	-	CSH-5867-GI21	CSH-5867-GK21

2.6 µm CHROMSHELL®

all dimensions in mm

Phase	30 × 3.0	50 × 3.0	75 × 3.0	100 × 3.0	150 × 3.0	250 × 3.0
C18 Plus	CSH-5722-GD30	CSH-5722-GG30	CSH-5722-GH30	CSH-5722-GI30	CSH-5722-GK30	-
C18-XB	CSH-5749-GD30	CSH-5749-GG30	CSH-5749-GH30	CSH-5749-GI30	CSH-5749-GK30	-
C18 Plus AD	-	CSH-5862-GG30	-	CSH-5862-GI30	CSH-5862-GK30	CSH-5862-GM30
C18 Polar	CSH-5751-GD30	CSH-5751-GG30	CSH-5751-GH30	CSH-5751-GI30	CSH-5751-GK30	-
C8	-	CSH-5863-GG30	-	CSH-5863-GI30	CSH-5863-GK30	CSH-5863-GM30
C4	-	CSH-5864-GG30	-	CSH-5864-GI30	CSH-5864-GK30	CSH-5864-GM30
Biphenyl	-	CSH-5851-GG30	-	CSH-5851-GI30	CSH-5851-GK30	CSH-5851-GM30
Phenyl-Hexyl	-	CSH-5865-GG30	-	CSH-5865-GI30	CSH-5865-GK30	CSH-5865-GM30
PFP	-	CSH-5866-GG30	-	CSH-5866-GI30	CSH-5866-GK30	CSH-5866-GM30
HILIC Plus	CSH-5752-GD30	CSH-5752-GG30	CSH-5752-GH30	CSH-5752-GI30	CSH-5752-GK30	CSH-5752-GM30
Cyano	-	CSH-5867-GG30	-	CSH-5867-GI30	CSH-5867-GK30	CSH-5867-GM30


2.6 µm CHROMSHELL®

all dimensions in mm

Phase	50 × 4.6	75 × 4.6	100 × 4.6	150 × 4.6	250 × 4.6
C18 Plus	CSH-5722-GG46	CSH-5722-GH46	CSH-5722-GI46	CSH-5722-GK46	-
C18-XB	CSH-5749-GG46	CSH-5749-GH46	CSH-5749-GI46	CSH-5749-GK46	-
C18 Plus AD	CSH-5862-GG46	-	CSH-5862-GI46	CSH-5862-GK46	CSH-5862-GM46
C18 Polar	CSH-5751-GG46	CSH-5751-GH46	CSH-5751-GI46	CSH-5751-GK46	-
C8	CSH-5863-GG46	-	CSH-5863-GI46	CSH-5863-GK46	CSH-5863-GM46
C4	CSH-5864-GG46	-	CSH-5864-GI46	CSH-5864-GK46	CSH-5864-GM46
Biphenyl	CSH-5851-GG46	-	CSH-5851-GI46	CSH-5851-GK46	CSH-5851-GM46
Phenyl-Hexyl	CSH-5865-GG46	-	CSH-5865-GI46	CSH-5865-GK46	CSH-5865-GM46
PFP	CSH-5866-GG46	-	CSH-5866-GI46	CSH-5866-GK46	CSH-5866-GM46
HILIC Plus	CSH-5752-GG46	CSH-5752-GH46	CSH-5752-GI46	CSH-5752-GK46	CSH-5752-GM46
Cyano	CSH-5867-GG46	-	CSH-5867-GI46	CSH-5867-GK46	CSH-5867-GM46

Tween 80

Tween 80 is used to stabilize aqueous solutions with drugs and also as an emulgator in the pharma industry. It is also used as an additive in vaccine production. Currently it is added to Covid19 vaccines.

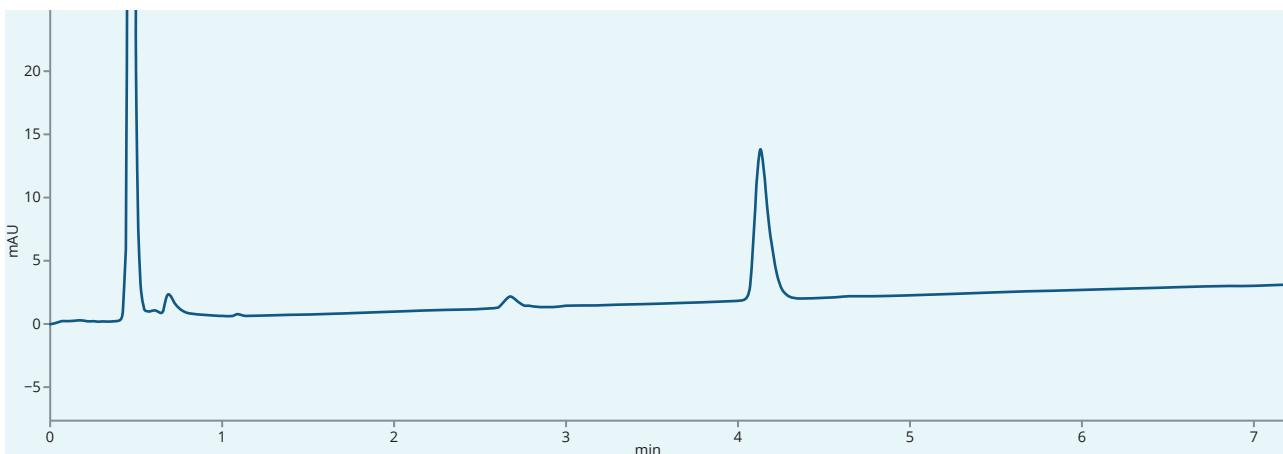

Analysis of hydrolyzed PS-80 on CHROMSHELL® C18-XB

Column	CHROMSHELL® C18-XB, 2.6 µm
Dimensions	100 mm × 4.6 mm
Part number	CSH-5749-GI46
Mobile phase	Proprietary
Temperature	Proprietary
Injection volume	2.5 µl
Detection	UV @195 nm
Analytes	1. Tween 80

CHROMSHELL®

Column protection

CHROMSHELL® UHPLC columns can be protected by means of a guard system or by using an appropriate guard column filter (in-line filter).

The ARION® Guard System (AGS) is ideal for the protection of CHROMSHELL® UHPLC columns. We recommend it as an easy and less expensive solution in comparison with high pressure guard systems. The AGS can be used with pressures up to **900 bar**. More details about this guard system are on page 46.

Protection can be perfectly ensured by installing a pre-column filter holder with a 0.2µm or 0.5µm frit. This in-line filter can withstand pressures of up to 1375 bar and is easy to use. The filter holder consists of a two-piece body and replaceable filter – a metal frit.

Main features and benefits:

- Minimized dead-volume.
- Easy installation and use.
- Pressure rating up to **1375 bar**.
- Works with 1/16inch column connections from all manufacturers.
- Spare frits with various porosities.



FGS in-line filter

In-line filter selection guide

The FGS in-line filter made from 316 stainless steel is designed to reduce the number of connections compared with standard pre-column filters.

The in-line filter guarantees a very small dead volume thanks to the small bore size (0.15 mm in the body and nut). The total length is 46.5 mm.



Replacement frits

FGS in-line filter holder

Description	Amount	Internal volume	Part number
FGS in-line filter holder for 0.2µm frit (including encased type frit)	1 pc	0.59 µl	FGS-5782-0R0
FGS in-line filter holder for 0.5µm frit (including encased type frit)	1 pc	0.61 µl	FGS-5782-0S0

Replacement frits

Description	Amount	Frit volume	Frit OD	Part number
FGS stainless steel frit for in-line filter 0.2 µm, ID 1.96 mm	5 pcs	0.11 µl	1.96 mm	FGS-5782-SRB
FGS stainless steel frit for in-line filter 0.5 µm, ID 1.96 mm	5 pcs	0.13 µl	1.96 mm	FGS-5782-SSB

Note: The frit consists of stainless steel frit and PEEK ring. The ring has 2.92 mm OD. The frit porosity values are only nominal. They do not reflect maximum pore size of the frit.



Exploded view


SPEEXTRA™

SPE columns



SpeExtra™ is a new range of SPE columns for your sample preparation.

Florisil® and HLB columns are suitable for use in the environmental and toxicology area. The SpeExtra™ HLB SPE column is based on a modified polymer of 100Å pore size. It offers a high surface area of >825 m²/g. The working pH range is from pH 1 to pH 13. The loading capacity is 20 %. It has been developed to clean a broad range of hydrophobic/hydrophilic compounds across various matrixes (plasma, urine, oil, water etc.).

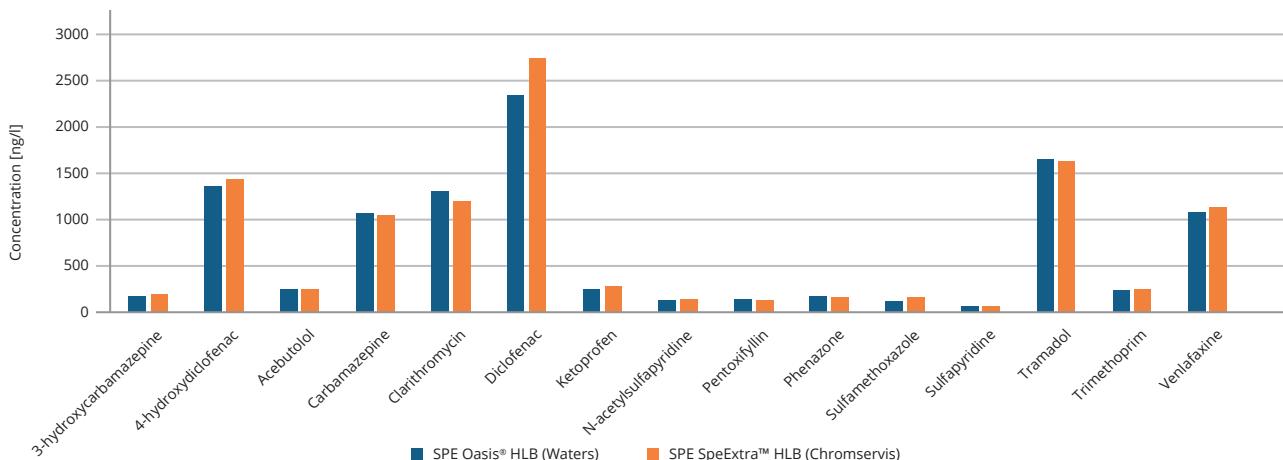

Comparison of SpeExtra™ with Waters Oasis® HLB cartridges

SpeExtra™ 30 mg	Particle size µm	Volume 1 ml	Qty
HLB Clinical	30	SPE-5804-AA01	50 pcs

SpeExtra™ 60 mg	Particle size µm	Volume 1 ml	Volume 3 ml	Qty
HLB Enviro	30	SPE-5804-AG01	SPE-5804-AG03	50 pcs
HLB Enviro	60	SPE-5804-EG01	SPE-5804-EG03	50 pcs

SpeExtra™ 50 mg	Particle size µm	Volume 1 ml	Qty
C18	50	SPE-5812-DH01	50 pcs
C8	50	SPE-5813-DH01	50 pcs
SAX	50	SPE-5814-DH01	50 pcs
SCX	50	SPE-5815-DH01	50 pcs

SpeExtra™ 100 mg	Particle size µm	Volume 1 ml	Volume 3 ml	Qty
C18	50	SPE-5812-DB01	-	100 pcs
C18	50	-	SPE-5812-DB03	50 pcs
C8	50	SPE-5813-DB01	-	100 pcs
C8	50	-	SPE-5813-DB03	50 pcs
SAX	50	SPE-5814-DB01	-	100 pcs
SAX	50	-	SPE-5814-DB03	50 pcs
SCX	50	SPE-5815-DB01	-	100 pcs
SCX	50	-	SPE-5815-DB03	50 pcs



SPE columns

SPEEXTRA™

SPE columns

SpeExtra™ 200 mg	Particle size µm	Volume 3 ml	Volume 6 ml	Qty
C18	50	SPE-5812-DC03	-	50 pcs
C8	50	SPE-5813-DC03	-	50 pcs
HLB Enviro	30	SPE-5804-AC03	-	50 pcs
HLB Enviro	30	-	SPE-5804-AC06	30 pcs
HLB Enviro	60	SPE-5804-EC03	-	50 pcs
HLB Enviro	60	-	SPE-5804-EC06	30 pcs
SAX	50	SPE-5814-DC03	-	50 pcs
SCX	50	SPE-5815-DC03	-	50 pcs

SpeExtra™ 500 mg	Particle size µm	Volume 3 ml	Volume 6 ml	Qty
C18	50	SPE-5812-DD03	-	50 pcs
C18	50	-	SPE-5812-DD06	30 pcs
C8	50	SPE-5813-DD03	-	50 pcs
C8	50	-	SPE-5813-DD06	30 pcs
HLB Enviro	30	-	SPE-5804-AD06	30 pcs
HLB Enviro	60	-	SPE-5804-ED06	30 pcs
SAX	50	SPE-5814-DD03	-	50 pcs
SCX	50	SPE-5815-DD03	-	50 pcs
Florisil® (pesticide grade)	150/250	SPE-5805-ND03	-	50 pcs

SpeExtra™ 1000 mg	Particle size µm	Volume 6 ml	Qty
Florisil® (ultra pure)*	150/250	SPE-5805-NE06	30 pcs

SpeExtra™ 2000 mg	Particle size µm	Volume 15 ml	Qty
Florisil® (ultra pure)*	150/250	SPE-5805-NF15	20 pcs

Note: Other phases on request

* Florisil® (ultra pure) has low bleed and is ideal for Analysis of Petroleum Hydrocarbons C10-C40.



12-position Vacuum SPE manifold (p/n SPE-5869-000A)

Sample preparation kit




MetAmino™ kits offer an easy sample preparation method for your LC/MS or GC/MS analysis. MetAmino™ kits include derivatization reagents and all clean-up accessories to prepare your sample for injection. They eliminate time consuming sample preparation procedures. The new clean-up procedure uses a special material as the end-step. The other advantage is that the derivatization procedure enables the extension of the analyte list. Contact us for further details.

- 76 amino acids, polyamines, biogen amines and coenzymes in 25 minutes (sample preparation and analysis time)
- Easy sample preparation
- Unique clean-up step
- LC/MS and GC/MS kit
- NIST library for GC/MS available
- Possible extension to other analytes on request




LC/MS separation


The chromatogram shown below displays TIC and some of the analyte's MRMs.

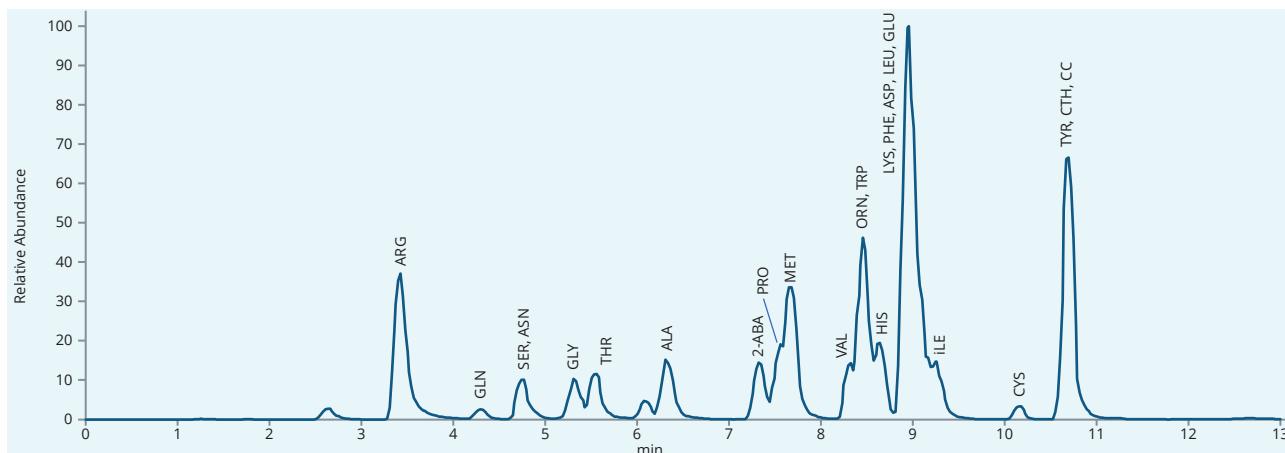


Chromatogram of 24 amino acids

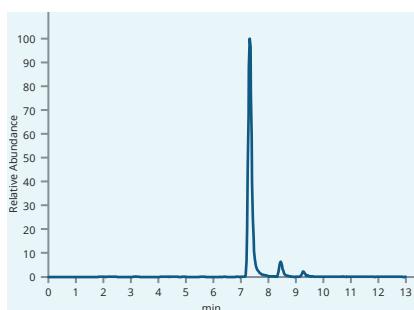


2-ABA (259.7–260.7)

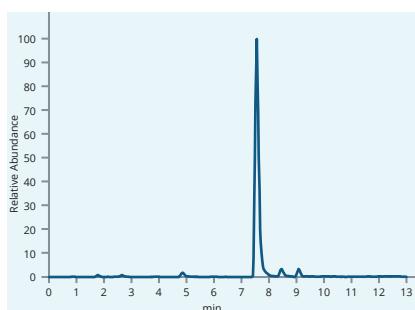


PRO (271.7–272.7)

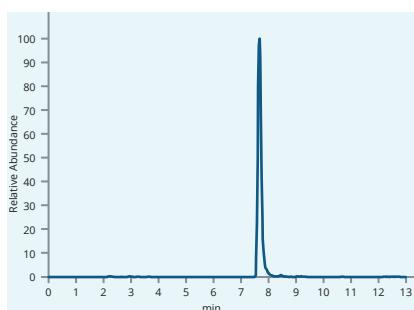


MET (305.7–306.7)

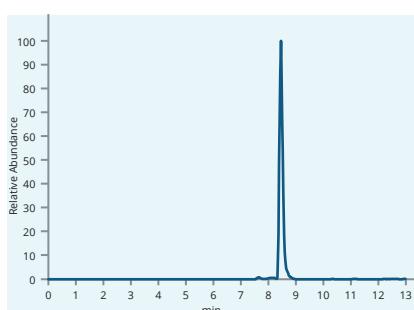


ORN (388.7–389.7)

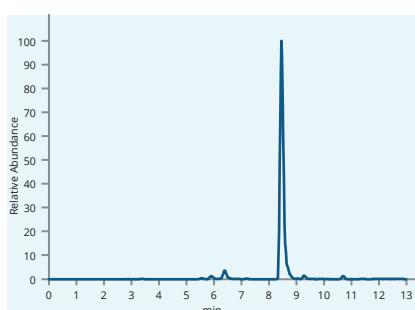


TRP (360.7–361.7)

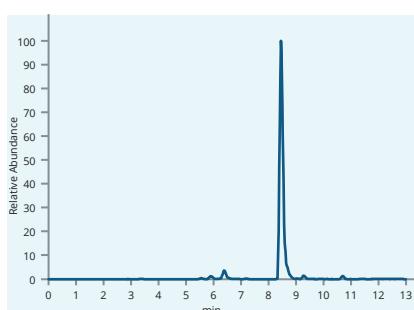


HIS (411.7–412.7)

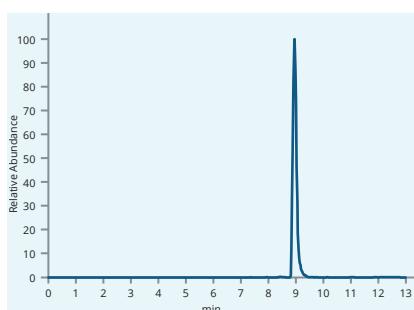

LYS (420.7–403.7)

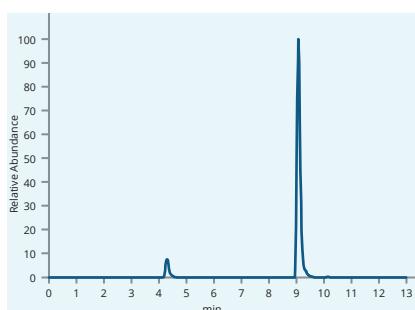

PHE (321.7–322.7)

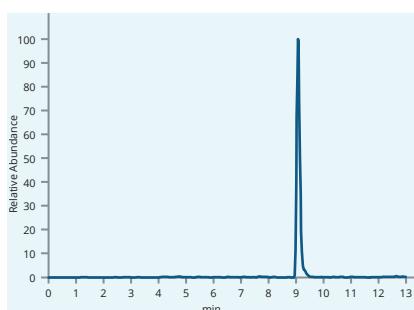

ASP (345.7–346.7)

METAMINO™


GC/MS kit

Peak No.	Name	Synonyms	Quantification	[min]	Mmi*	Diagnostic ions		
						m/z	m/z	m/z
1	Sarcosine	SAR		4.62	497.0308	270	226	69
2	Alanine	ALA	✓	4.73	497.0308	270	70	69
3	N-Acetylglycine			4.92	299.0392	256	113	212
4	Glycine	GLY	✓	4.93	483.0151	256	212	56
5	3-Methylglutaric acid			4.97	510.0512	311	282	227
6	2-Aminobutyric acid	ABA		5.17	511.0465	284	84	113
7	3-Hydroxymethylglutaric acid			5.34	752.0225	285	311	85
8	3-Alanine			5.36	497.0308	269	256	98
9	Valine	VAL	✓	5.41	525.0621	298	283	98
10	N-Acetylcysteine			5.46	571.0134	282	309	509
11	3-Aminoisobutyric acid	BAIBA		5.47	511.0465	256	112	113
12	3-amino-n-butyric acid			5.52	511.0465	270	227	283
13	Norvalin	NVAL		5.69	525.0621	298	256	98
14	Leucine	LEU	✓	5.92	539.0778	312	270	256
15	Ethanolamine	EAM		5.98	513.0257	256	269	270
16	Isoleucine	ILE	✓	5.99	539.0778	283	312	256
17	Allo-isoleucine	aILE		6.02	539.0778	312	283	256
18	Homoserine	HSER		6.04	753.0278	100	283	128
19	Proline	PRO	✓	6.05	523.0465	296	297	69
20	4-Aminobutyric acid	GABA		6.20	511.0465	112	256	69
21	Threonine	THR	✓	6.24	527.0415	100	283	483
22	Norleucine	NLEU		6.28	539.0778	312	256	112
23	Pipecolic acid	PIP		6.41	537.0621	310	518	407
24	N-Acetylaspartic acid			6.46	539.0414	270	312	228
25	Asparagine	ASN		6.70	522.0261	295	496	113
26	Aspartic acid	ASP	✓	6.73	723.0173	254	496	296
27	3-Methylcysteine			6.76	543.0185	61	300	316
28	Thioproline	TPR		6.78	541.0029	314	287	86
29	2-Hydroxyglutaric acid			6.78	738.0169	283	239	511
30	Serine	SER	✓	7.07	739.0122	268	295	51
31	Acetylserine			7.09	555.0363	268	312	113
32	Pyroglutamic acid			7.43	537.0000	282	310	510
33	N-Acetylglutamic acid			7.44	567.0727	282	310	510
34	Glutamic acid	GLU	✓	7.45	737.0329	282	310	510
35	4-Hydroxyproline	HYP	✓	7.47	539.0414	312	294	68
36	Methionine	MET	✓	7.49	557.0342	538	294	494
37	Cysteine	CYS	✓	7.84	754.9895	328	285	113
38	Selenomethionine			7.88	604.9786	282	510	405
39	Ethionine	ETH		7.90	571.0498	282	311	571
40	2-Aminoacidic acid	AAA		8.09	751.0486	124	282	324
41	Phenylalanine	PHE	✓	8.09	573.0621	91	330	92
42	3-Hydroxyproline			8.12	539.0414	312	129	256
43	2,4-Diaminobutyric acid	DABA		8.52	752.0438	282	256	325
44	S-carboxymethyl-cysteine			8.55	769.0050	213	259	314
45	Homocysteine	HCYS		8.59	769.0045	282	342	82
46	2-Aminopimelic acid	APA		8.66	765.0642	338	138	95
47	Homophenylalanine	Internal standard		8.83	587.0778	283	117	483
48	Histamine	HTA		8.78	563.0526	308	320	113
49	Glutamine	GLN		8.86	554.0523	84	282	327
50	4-Aminobenzoic acid	PABA		9.05	545.0308	146	345	346
51	1-Methylhistidine			9.06	577.0682	95	150	350
52	Chloro-phenylalanine			9.16	607.0231	125	364	180
53	Methionine sulfone	MET-SO2		9.18	589.0240	282	82	189
54	Ornithine	ORN		9.25	766.0595	296	256	69
55	Acetyltyrosine			9.49	871.0489	333	289	188
56	Histidine	HIS	✓	9.55	789.0391	307	362	113
57	Glycylproline	GPR		9.69	580.0679	70	153	296
58	Lysine	LYS	✓	9.77	780.0751	310	256	153
59	Tyramine			9.85	589.0570	346	333	289
60	2,6-Diaminopimelic acid (isomers)			10.28	1006.0616	308	536	
61	Tyrosine	TYR	✓	10.41	815.0435	333	289	113
62	5-Hydroxylysine (isomers)	HLY	✓	10.76	1022.0565	269	256	69
63	Cystathione	CTH		11.12	1038.0337	328	282	69
64	Dopamine	DAM		11.12	831.0000	256	531	113
65	Tryptophan	TRP	✓	11.19	612.0730	130	131	385
66	3,4-Dihydroxyphenylalanine	DOPA		11.32	1057.0249	149	531	575
67	Prolylhydroxyproline	PHP		11.52	862.0806	296	297	294
68	3-Nitrotyrosine			11.68	860.0286	334	113	378
69	Selenocystine	Se-C-C		11.93	1151.879	496	295	268


* Mmi = monoisotopic mass of the derivative of the relevant metabolite.

GC/MS separation


A typical chromatogram of the amino acid standard solution included in this kit.

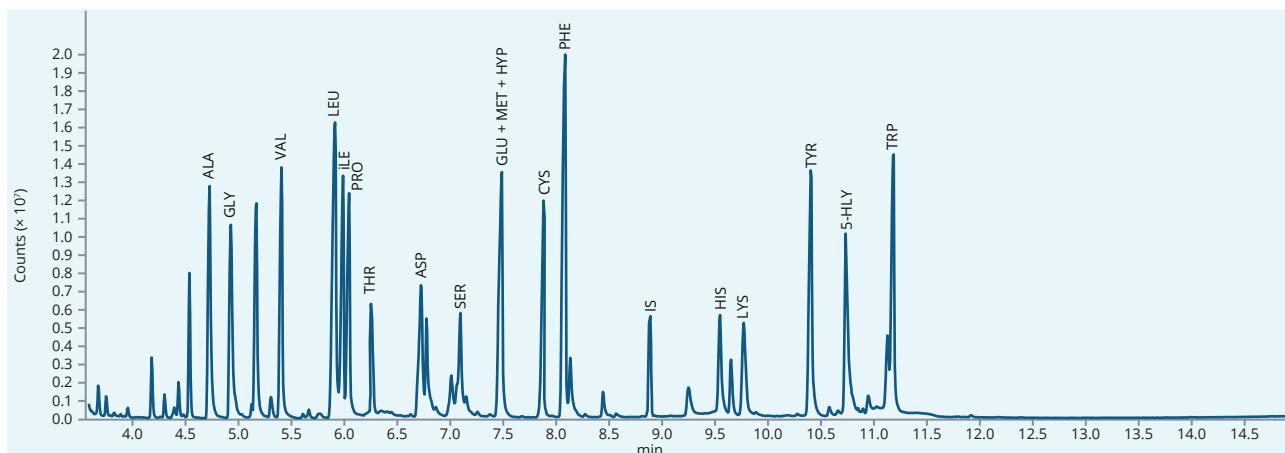


Chromatogram of standard solution (above)

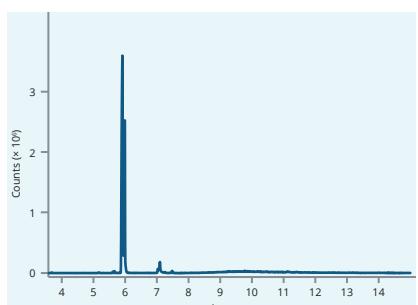


LEU (EIC 312)

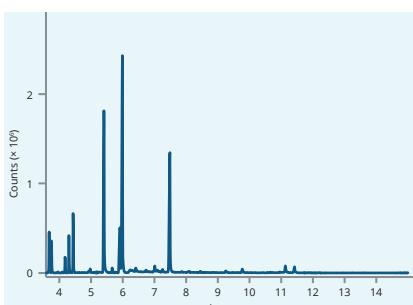


ILE (EIC 283)

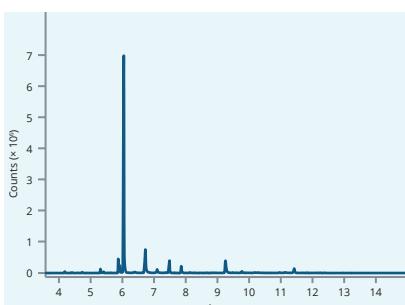


PRO (EIC 296)

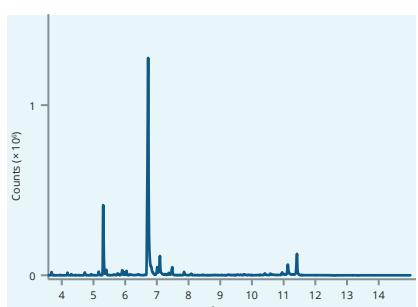


ASP (EIC 254)

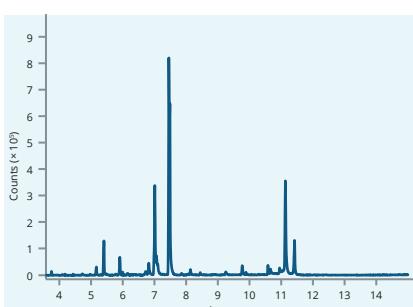


GLU (EIC 282)

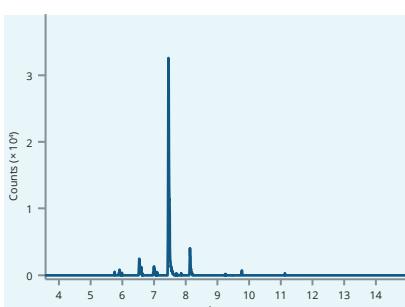


MET (EIC 538)

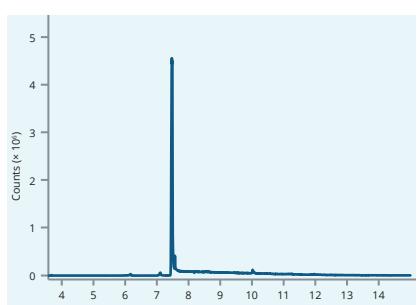

HYP (EIC 312)

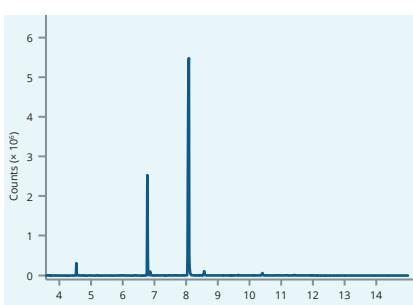

PHE (EIC 91)

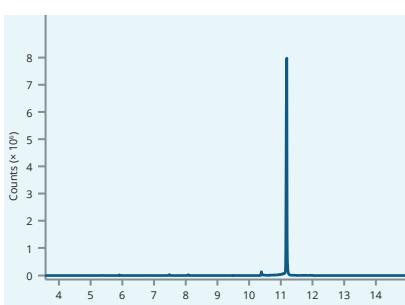

TRP (EIC 130)

Note: EIC = Extracted Ion Chromatogram.

Ordering information

Sample preparation kit (CF)	Part number	Samples
MetAmino™ sample preparation LC/MS start-up kit, CF	MAK-5857-AA01	100
MetAmino™ sample preparation GC/MS start-up kit, CF	MAK-5857-BA01	100
MetAmino™ sample preparation LC/MS basic kit, CF	MAK-5857-CA04	400
MetAmino™ sample preparation GC/MS basic kit, CF	MAK-5857-DA04	400

Metabolite sample preparation kit (CF)

- Derivatization reagents
- Derivatization centrifuge filters (set of 100/400 pcs)
- 2ml screw top vials (set of 100/400 pcs)
- Micro tube rack
- LC/MS or GC/MS column
- Sample preparation manual

Sample preparation kit (SPE)	Part number	Samples
MetAmino™ sample preparation LC/MS kit, SPE	MAK-5857-CS01	100

Metabolite sample preparation kit (SPE)

- Derivatization reagents
- Derivatization SPE MetAmino™ columns (set of 100 pcs)
- 2ml screw top vials (set of 100 pcs)
- Micro tube rack
- LC/MS column
- Sample preparation manual

Note: The SPE metabolite kit has been developed for users who prefer the SPE technique and do not have the possibility to use the much easier MetAmino™ centrifugal filters.

VIALS and CAPS

VIALS and CAPS

2ml crimp vials

Description	Qty	Part number
Crimp vials		
2ml crimp vials, 12 x 32 mm, clear	100 pcs	CHS-2-CC
2ml crimp vials, 12 x 32 mm, clear with label	100 pcs	CHS-2-CCL
2ml crimp vials, 12 x 32 mm, amber with label	100 pcs	CHS-2-CAL

Description	Qty	Part number
Caps for 2ml crimp vials		
11mm Al crimp caps with septa rubber/PTFE	100 pcs	CHS-AL11-RBT-C
11mm Al crimp caps with septa silicone/PTFE	100 pcs	CHS-AL11-ST-C
11mm Al crimp caps with septa silicone/PTFE	1000 pcs	CHS-AL11-ST-M
11mm Al crimp caps with septa orange silicone/PTFE	100 pcs	CHS-AL11-ORST-C
11mm Al crimp caps with septa orange silicone/PTFE	1000 pcs	CHS-AL11-ORST-M
11mm Al crimp caps with pre-slit septa silicone/PTFE	100 pcs	CHS-AL11-PSST-C
11mm Al crimp caps with pre-slit septa silicone/PTFE	1000 pcs	CHS-AL11-PSST-M
11mm Al crimp caps with septa PTFE/silikon/PTFE	100 pcs	CHS-AL11-TST-C
11mm Al crimp caps with septa PTFE/silikon/PTFE	1000 pcs	CHS-AL11-TST-M

Description	Qty	Part number
Combo pack sets crimp vials + caps with septa		
2ml crimp vials, 12 x 32 mm, clear and 11mm Al crimp caps with septa orange silicone/PTFE	1000 pcs	CHS-2-CC-SET CL
2ml crimp vials, 12 x 32 mm, clear and 11mm Al crimp caps with pre-slit septa silicone/PTFE	1000 pcs	CHS-2-CC-SET PS
2ml crimp vials, 12 x 32 mm, clear and 11mm Al crimp caps with septa rubber/PTFE	1000 pcs	CHS-2-CC-SET RB
2ml crimp vials, 12 x 32 mm, clear and 11mm Al crimp caps with septa silicone/PTFE	1000 pcs	CHS-2-CC-SET SIL
2ml crimp vials, 12 x 32 mm, amber with label and 11mm Al crimp caps with septa orange silicone/PTFE	1000 pcs	CHS-2-CAL-SET CL
2ml crimp vials, 12 x 32 mm, amber with label and 11mm Al crimp caps with pre-slit septa silicone/PTFE	1000 pcs	CHS-2-CAL-SET PS
2ml crimp vials, 12 x 32 mm, amber with label and 11mm Al crimp caps with septa rubber/PTFE	1000 pcs	CHS-2-CAL-SET RB
2ml crimp vials, 12 x 32 mm, amber with label and 11mm Al crimp caps with septa silicone/PTFE	1000 pcs	CHS-2-CAL-SET SIL

Description	Qty	Part number
Inserts for crimp vials and for short thread robotic vials		
250 µl, 5.8 x 29 mm, conical glass inserts with plastic feet	100 pcs	CHS-INS-630
250 µl, 5.8 x 31 mm, conical glass inserts without plastic feet	1000 pcs	02-MTVWG
250 µl, 5.8 x 29 mm, conical plastic inserts with plastic feet	100 pcs	CHS-INS-630P
400 µl, 5.8 x 31 mm, glass inserts with flat bottom	500 pcs	C4011-631



Crimp vials



250 µl insert CHS-INS-630

VIALS and CAPS

VIALS and CAPS

2ml screw vials

Description	Qty	Part number
Screw vials, 8-425 thread		
2ml screw vials, 8-425 thread, 12 × 32 mm, clear with label	100 pcs	CHS-2-S8CL
2ml screw vials, 8-425 thread, 12 × 32 mm, clear without label	100 pcs	CHS-2-S8C
2ml screw vials, 8-425 thread, 12 × 32 mm, amber with label	100 pcs	CHS-2-S8AL

Description	Qty	Part number
Caps for 2ml vials, 8-425 thread		
8-425 thread plastic caps with septa silicone/PTFE	100 pcs	1076-8002-C
8-425 thread plastic caps with septa silicone/PTFE	1000 pcs	1076-8002-M
8-425 thread plastic caps with pre-slit septa silicone/PTFE	1000 pcs	1076-80021-M
8-425 thread plastic caps with septa PTFE/silicone/PTFE	1000 pcs	1066-8002-M

Description	Qty	Part number
Spare septa 8 mm for caps, 8-425 thread		
8mm septa silicone/PTFE	100 pcs	1076-0315-C
8mm septa silicone/PTFE	1000 pcs	1076-0315-M
8mm pre-slit septa silicone/PTFE	100 pcs	1076-03151-C
8mm soft septa silicone/PTFE for Shimadzu	1000 pcs	C4013-61

Description	Qty	Part number
Inserts for vials, 8-425 thread		
150 µl, 4.8 × 29 mm, conical glass inserts with plastic feet	100 pcs	CHS-INS-530
200 µl, 4.8 × 31 mm, glass inserts with flat bottom	500 pcs	C4012-465

VIALS and CAPS

VIALS and CAPS

2ml screw robotic vials

Description	Qty	Part number
Short thread 2ml robotic screw vials		
2ml short thread robotic screw vials, 12 x 32 mm, clear without label	100 pcs	CHS-2-S9C
2ml short thread robotic screw vials, 12 x 32 mm, clear with label	100 pcs	CHS-2-S9CL
2ml short thread robotic screw vials, 12 x 32 mm, amber with label	100 pcs	CHS-2-S9AL

Description	Qty	Part number
Caps for short thread 2ml robotic screw vials		
Blue plastic caps for robotic vials with septa rubber/PTFE	100 pcs	CHS-P9-RBT-C
Blue plastic caps for robotic vials with septa silicone/PTFE	100 pcs	CHS-P9-ST-C
Blue plastic caps for robotic vials with septa silicone/PTFE	1000 pcs	CHS-P9-ST-M
Blue plastic caps for robotic vials with bonded septa silicone/PTFE	100 pcs	CHS-P9-BST-C
Blue plastic caps for robotic vials with bonded septa silicone/PTFE	1000 pcs	CHS-P9-BST-M
Blue plastic caps for robotic vials with bonded ULB septa silicone/PTFE	100 pcs	CHS-P9-BST-ULB-C
Blue plastic caps for robotic vials with pre-slit septa silicone/PTFE	100 pcs	CHS-P9-PSST-C
Blue plastic caps for robotic vials with pre-slit septa silicone/PTFE	1000 pcs	CHS-P9-PSST-M
Blue plastic caps for robotic vials with bonded pre-slit ULB septa silicone/PTFE	100 pcs	CHS-P9-BPSST-ULB-C

Description	Qty	Part number
Spare septa 9 mm for caps for short thread robotic screw vials		
9mm septa silicone/PTFE	100 pcs	CHS-9-ST-C
9mm septa silicone/PTFE	1000 pcs	CHS-9-ST-M
9mm septa PTFE/silicone/PTFE	100 pcs	CHS-9-TST-C
9mm septa PTFE/silicone/PTFE	1000 pcs	CHS-9-TST-M

Description	Qty	Part number
Combo pack sets short thread robotic vials + caps with septa		
Short thread 2ml robotic screw vials, 12 x 32 mm, clear with label and blue plastic caps with septa silicone/PTFE	1000 pcs	CHS-2-S9CL-BLUESET CL
Short thread 2ml robotic screw vials, 12 x 32 mm, clear with label and blue plastic caps with bonded septa silicone/PTFE	1000 pcs	CHS-2-S9CL-BLUESET BND
Short thread 2ml robotic screw vials, 12 x 32 mm, clear with label and blue plastic caps with pre-slit septa silicone/PTFE	1000 pcs	CHS-2-S9CL-BLUESET PS
Short thread 2ml robotic screw vials, 12 x 32 mm, amber with label and blue plastic caps with septa silicone/PTFE	1000 pcs	CHS-2-S9AL-BLUESET CL
Short thread 2ml robotic screw vials, 12 x 32 mm, amber with label and blue plastic caps with pre-slit septa silicone/PTFE	1000 pcs	CHS-2-S9AL-BLUESET PS

Note: Robotic short thread vials fit to all frequent GC and LC samplers, caps with pre-slit septa are right for Waters LC systems.



2ml screw robotic vials

VIALS and CAPS

VIALS and CAPS

2ml screw wide opening vials

Description	Qty	Part number
Screw vials 2 ml wide opening, 10-425 thread		
2ml screw vials wide opening, 12 × 32 mm, 10-425, clear without label	100 pcs	CHS-2-S10C
2ml screw vials wide opening, 12 × 32 mm, 10-425, clear with label	100 pcs	CHS-2-S10CL
2ml screw vials wide opening, 12 × 32 mm, 10-425, amber with label	100 pcs	CHS-2-S10AL

Description	Qty	Part number
Caps for screw vials 2 ml wide opening, 10-425 thread		
10-425 thread plastic caps with septa silicone/PTFE	100 pcs	0576-1002-C
10-425 thread plastic caps with septa silicone/PTFE	1000 pcs	0576-1002-M
10-425 thread plastic caps with pre-slit septa silicone/PTFE	100 pcs	0576-10021-C
10-425 thread plastic caps with pre-slit septa silicone/PTFE	1000 pcs	0576-10021-M

Description	Qty	Part number
Spare septa 10 mm for caps, 10-425 thread		
10mm septa silicone/PTFE	100 pcs	0576-0375-C
10mm septa silicone/PTFE	1000 pcs	0576-0375-M
10mm soft septa silicone/PTFE for Shimadzu	100 pcs	C4010-35



2ml screw wide opening vials



2ml amber screw wide opening vials

VIALS and CAPS

VIALS and CAPS

4ml screw vials

Description	Qty	Part number
Screw vials 4 ml, 13-425 thread		
4ml screw vials, 15 × 45 mm, clear without label	100 pcs	CHS-4-S13C
4ml screw vials, 15 × 45 mm, clear with label	100 pcs	CHS-4-S13CL
4ml screw vials, 15 × 45 mm, amber with label	100 pcs	CHS-4-S13AL

Description	Qty	Part number
Caps for 4ml screw vials, 13-425 thread		
13-425 thread plastic caps with septa silicone/PTFE	100 pcs	1076-1302-C
13-425 thread plastic caps with septa silicone/PTFE	1000 pcs	1076-1302-M
13-425 thread plastic caps with pre-slit septa silicone/PTFE	100 pcs	1076-13021-C

Description	Qty	Part number
Spare septa 12 mm for caps 13-425 thread		
12mm septa silicone/PTFE	100 pcs	1076-0465-C
12mm septa silicone/PTFE	1000 pcs	1076-0465-M

VIALS and CAPS

VIALS and CAPS

Headspace crimp vials

Description	Qty	Part number
Headspace crimp vials		
10ml headspace crimp vials, 23 × 46 mm, clear, rounded bottom	100 pcs	CHS-10-CCL-RB
10ml headspace crimp vials, 23 × 46 mm, clear, flat bottom	100 pcs	CHS-10-CCL-FB
20ml headspace crimp vials, 23 × 75 mm, clear, rounded bottom	100 pcs	CHS-20-CCL-RB
20ml headspace crimp vials, 23 × 75 mm, clear, flat bottom	100 pcs	C4020-20
20ml headspace crimp vials, 23 × 75 mm, amber, rounded bottom	125 pcs	20-CV(A)

Description	Qty	Part number
20mm bimetallic crimp caps for headspace vials		
20mm bimetallic crimp caps with septa silicone/PTFE	100 pcs	CHS-BM20-ST-C
20mm bimetallic crimp caps with septa silicone/PTFE	1000 pcs	CHS-BM20-ST-M
20mm bimetallic crimp caps with septa silicone translucent (soft)/PTFE	100 pcs	CHS-BM20-ST-TRL-C
20mm bimetallic crimp caps with septa silicone translucent (soft)/PTFE	1000 pcs	CHS-BM20-ST-TRL-M

Description	Qty	Part number
20mm magnetic steel crimp caps for headspace vials		
20mm magnetic steel crimp caps with septa silicone/PTFE	100 pcs	CHS-MG20-ST-C
20mm magnetic steel crimp caps with septa silicone/PTFE	1000 pcs	CHS-MG20-ST-M
20mm magnetic steel crimp caps with ULB septa silicone/PTFE	100 pcs	CHS-MG20-ST-ULB-C
20mm magnetic steel crimp caps with ULB septa silicone/PTFE	1000 pcs	CHS-MG20-ST-ULB-M

Description	Qty	Part number
20mm aluminium crimp caps for headspace vials		
20mm aluminium crimp caps with septa silicone/PTFE	100 pcs	CHS-AL20-ST-C
20mm aluminium crimp caps with septa silicone/PTFE	1000 pcs	CHS-AL20-ST-M
20mm aluminium crimp caps with ULB septa silicone/PTFE	100 pcs	CHS-AL20-ST-ULB-C
20mm aluminium crimp caps with ULB septa silicone/PTFE	1000 pcs	CHS-AL20-ST-ULB-M
20mm aluminium crimp caps with septa silicone translucent (soft)/PTFE	100 pcs	CHS-AL20-ST-TRL-C
20mm aluminium crimp caps with septa silicone translucent (soft)/PTFE	1000 pcs	CHS-AL20-ST-TRL-M

Description	Qty	Part number
Spare septa 20 mm for crimp headspace vials		
20mm septa silicone/PTFE, thickness 3 mm	100 pcs	CHS-20-ST-C
20mm septa silicone/PTFE, thickness 3 mm	1000 pcs	CHS-20-ST-M
20mm septa silicone translucent (soft)/PTFE, thickness 3 mm	100 pcs	CHS-20-ST-TRL-C
20mm septa silicone translucent (soft)/PTFE, thickness 3 mm	1000 pcs	CHS-20-ST-TRL-M

Note: Headspace vials with rounded bottom fit to CTC and other frequent modern samplers, headspace vials with flat bottom fit to Agilent headspace and Dani headspace systems.



Headspace vials

VIALS and CAPS

VIALS and CAPS

Headspace screw vials

Description	Qty	Part number
Headspace screw vials		
10ml headspace screw vials, 22 × 45 mm, clear, rounded bottom	100 pcs	CHS-10-SC-RB
20ml headspace screw vials, 22 × 75 mm, clear, rounded bottom	100 pcs	CHS-20-SC-RB

Description	Qty	Part number
Magnetic caps with septa for screw headspace vials		
Magnetic caps with silicone/PTFE septa for screw headspace vials, thickness 2 mm	100 pcs	CHR-1414
Magnetic caps with silicone/PTFE septa for screw headspace vials, thickness 1.5 mm	100 pcs	CHR-1309

Description	Qty	Part number
Spare septa 18 mm for screw headspace vials		
18mm septa silicone/PTFE for screw headspace vials, thickness 3 mm	100 pcs	0900-0691-C
18mm septa silicone/PTFE for screw headspace vials, thickness 3 mm	1000 pcs	0900-0691-M
18mm septa silicone/PTFE for screw headspace vials, thickness 1.3 mm	100 pcs	0905-0691-C
18mm septa silicone/PTFE for screw headspace vials, thickness 1.3 mm	1000 pcs	0905-0691-M

Description	Qty	Part number
Spare magnetic caps for screw headspace vials		
Magnetic caps for screw headspace vials	125 pcs	18-MSC



Screw headspace caps with septa

VIALS and CAPS

VIALS and CAPS

Crimping and decapping tools

Manual Crimpers and Decappers

- Easily-viewed adjustment knob
- Strong light-weight plastic body
- Bottom-pull handle design prevents wobbling

High Power Crimping Tool

Fastest and most powerful CRS crimping Tool

- Strong enough for all steel and magnetic caps
- Designed with external power source and cord (no battery)
- Uses interchangeable jaw sets (ordered separately)

Manual crimpers	Qty	Part number
8mm Crimper	1 pc	C*308990
11mm Crimper	1 pc	C*311990
13mm Crimper	1 pc	C*313990
13mm Crimper for Flip Off Caps*	1 pc	C*313992
20mm Crimper	1 pc	C*320990
20mm Crimper for Flip Off Caps*	1 pc	C*320992

* Not for use with Flip-Up Caps.

Manual decappers	Qty	Part number
11mm Decapper	1 pc	C*311991
13mm Decapper	1 pc	C*313991
20mm Decapper	1 pc	C*320991

High power electronic tool	Qty	Part number
High Power Electronic Crimping Tool**	1 pc	C*6AHPS0
8mm Crimper Jaw	1 pc	C*308955
11mm Crimper Jaw	1 pc	C*311955
13mm Crimper Jaw	1 pc	C*313955
13mm Crimper Jaw for Flip Off Caps*	1 pc	C*313956
20mm Crimper Jaw	1 pc	C*320955
20mm Crimper Jaw for Flip Off Caps*	1 pc	C*320956
11mm Decapper Jaw	1 pc	C*311965
13mm Decapper Jaw	1 pc	C*313965
20mm Decapper Jaw	1 pc	C*320965

* Not for use with Flip-Up Caps.

**Jaws have to be ordered separately.



Manual crimper



High power electric crimper

INDEX



Applications and Keywords

Aflatoxins by LC/MS
Alcaloids – xanthine derivatives
Aldehyde/Ketone DNPH derivatives
API glucuronide by LC/MS
Applications and Keywords
Batch to batch reproducibility
Beta Blockers
Bitter acids in hop
Cannabinoids
Circularity
Circularity & surface smoothness
Clonazepam
Column protection
Complementary selectivities
Crimping and decapping tools
Cross reference guide
Denatonium Benzoate
Drink additives
Fluorinated compounds
Furans in transformer oil
GC/MS kit
GC/MS separation
Guard column system
Guard system for preparative columns Guard System Selection
Guide Headspace crimp vials
Headspace screw vials
HMF in Infusion Solution
HMF in syrup
HPLC column selectivity

20–21	Ibuprofen	25
10	In-line filter selection guide	69
31	Ipidacrine	25
57	Lactoferrin in bovine milk	48
97	Lactoferrin in goat's milk	49
8–9	LC/MS kit	73
56	LC/MS separation	74
19	Monosaccharides, disaccharides and sugar alcohol	17
37	Non-nutritive sweeteners	11
65	Opioids and Tramadol and their metabolites by LC/MS	32–36
69	Organic acids	13
63	Pharmaceutical drugs	24–26
96	Preservatives in fats and oils	12
79	Preservatives in syrup	12
16	Product support	45
13	Sample preparation kit	72
27	SPE columns	70–71
30	Stevia glycosides	60
75	Triazoles	60
76	Tween 80	68
50–51	Veterinary drugs	28–29
53	Vitamin D in dry blood spot	22–23
52	Vitamins A and E	14–15
94	Wheat pigments	18
95		
59		
16		
3		

Use our application database. The ARION® website has a search engine to find an application based on different keywords, e.g. compound name, trivial name, formula etc.

ARION® is a trademark registered by Chromservis s.r.o.

ASTRA® is a trademark registered by Chromservis s.r.o.


CHROMSHELL® is a trademark registered by Chromservis s.r.o.

SpeExtra™ is a trademark by Chromservis s.r.o.

LION™ is a trademark by Chromservis s.r.o.

MetAmino™ is a trademark by Chromservis s.r.o.

Other trademarks and trade names may be used in this document to refer to either the entities claiming the marks and/or names or their products and are the property of their respective owners. We disclaim proprietary interest in the marks and names of others.

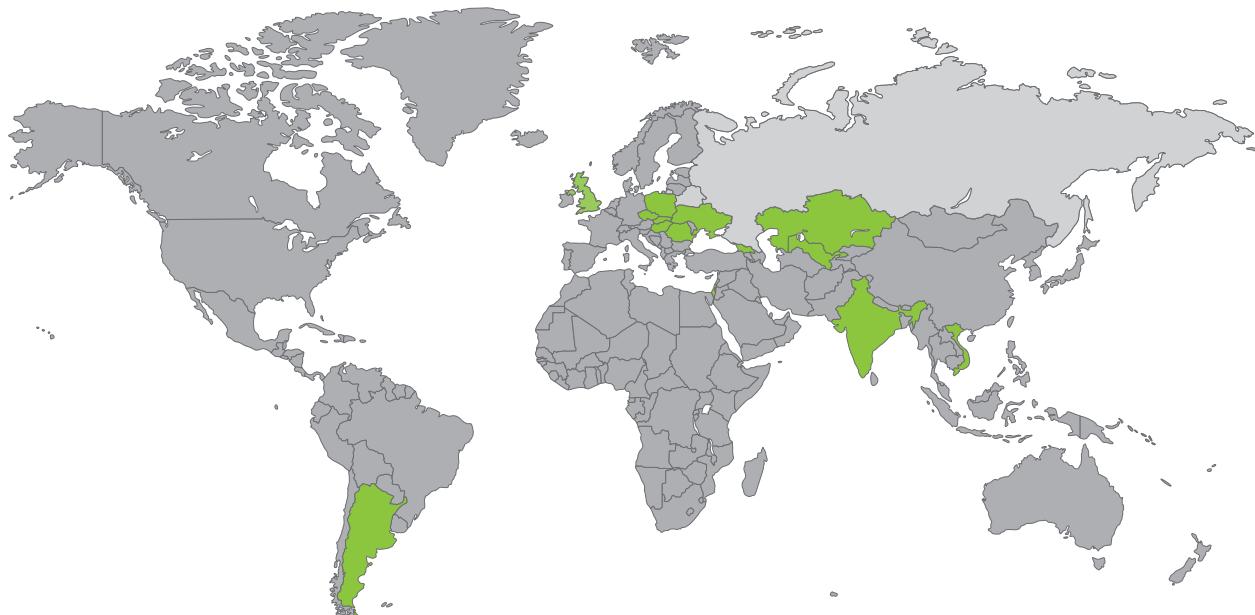

America

Argentina
Bolivia
Brazil
Canada
Chile
Colombia
Costa Rica
Cuba
Ecuador
El Salvador
Guatemala
Honduras
Mexico
Nicaragua
Paraguay
Peru
Uruguay
USA
Venezuela

Europe

Albania
Armenia
Austria
Azerbaijan
Belarus
Belgium
Bosnia and Herzegovina
Bulgaria
Croatia
Cyprus
Czech Republic
Denmark
Estonia
Finland
France
Georgia
Germany
Greece
Hungary
Iceland
Italy
Latvia
Lithuania
Luxembourg
Malta
Moldavia
Montenegro
The Netherlands
Norway
Poland
Portugal
Romania
Russia
Serbia
Slovakia
Slovenia
Spain
Sweden
Ukraine
United Kingdom

Asia

Cambodia
China
India
Israel
Kazakhstan
Jordan
Lebanon
Mongolia
Pakistan
Qatar
Saudi Arabia
Thailand
Turkey
Turkmenistan
United Arab Emirates
Uzbekistan
Vietnam

Australia/Indonesia/Pacific

Australia
Japan
Malaysia
New Zealand
Philippines
Singapore
Sri Lanka
South Korea

Distributor:



"SHIM-POL A.M. Borzymowski"
E. Borzymowska-Reszka A. Reszka Spółka Jawna
ul. Lubomirskiego 5, 05-080 Izabelin
Tel: +48 22 72 27 048
E-mail: biuro@shim-pol.pl
www.shim-pol.pl



Some chromatograms were evaluated by Clarity™
Chromatography Station (DataApex Ltd.)
www.arionchromatography.com

Chromatography
Product Guide
Version 4.22